TRACKS

Item Nr	Description
6255/400	Galvanised track 62 x 55 mm, thickness 25/10 4 m long
6255/500	Ditto 5 m long
6255/600	Ditto 6 m long
6255GE/600	Galvanised track 62 x 55 mm, thickness 20/10 6 m long



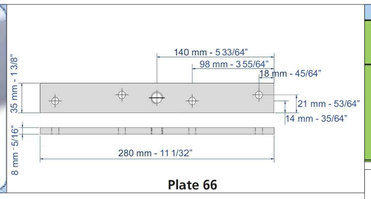



Plate 66

Track section :	25 x 25	35 x 30	50 x 40	62 x 55	85 x 70	85 x 70
Description	Item Nr					
Fixing bracket with normal rod	2521	3531	5041	6256	8571	8578 MC*
Fixing bracket with long rod	2521 L	3531 L	5041 L	6256 L	8571 L	8578 ML*



Fixing bracket


Item Nr	Dim. D	Dim. H	Dim. L
5144	10,5	57	100
6256	14	125	86
6256 L	14	180	86
6356	12,5	96	83
6359	12,5	69	130
8571	20	162	110
8571 L	20	227	110
8578 MC	20	162	118
8578 ML	20	227	118

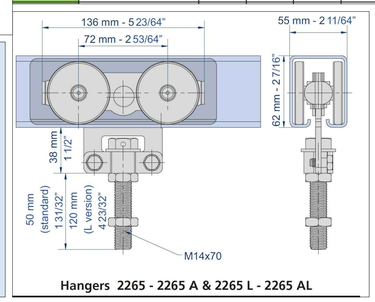


Hangers 2265 - 2265 A & 2265 L - 2265 AL

1314 E Reinforced cane bolt witrh screwing plate Height 300 mm
Rod diameter 14 mm adjustable nut







1101

GUIDES

1110/400	U-profile 30 x 30 mm, galvanised. 4 m long	4
1110/500	Ditto 5 m long	4
1110/600	Ditto 6 m long	4
1101	Bottom guide with olive fixed on a screwing type reinforced plate (square ends) - For U-profile 30 x 30 mm See dimensions and assembly instructions on p. 65	10



1290




1110



1101

HANDLES


1293	Handle in ABS, mortising type Height : 75 mm - Width : 20 mm
1296	Handle in ABS, mortising type Height : 70 mm - Width : 46 mm
1290	Handle made with buckled sheet 15/10e Height : 200 mm - Width : 90 mm




1150/105


SEALING BRUSH

1150/105	Sealing brush, packed in individual plastic bags Length = 1.05 m. Total height = 35 mm - Height of the brush = 15 mm	10

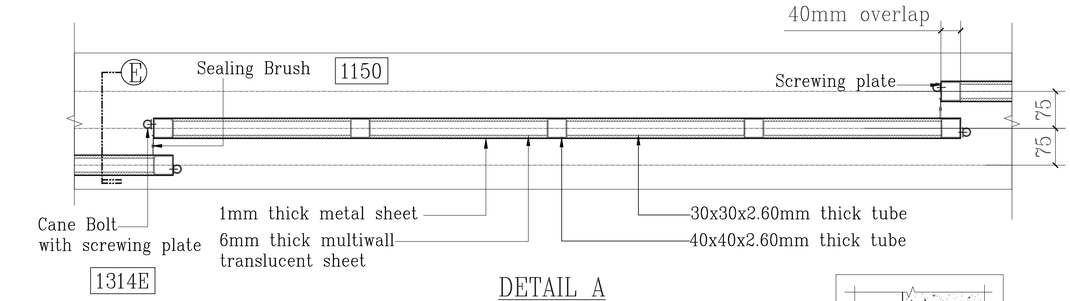


DETAIL A




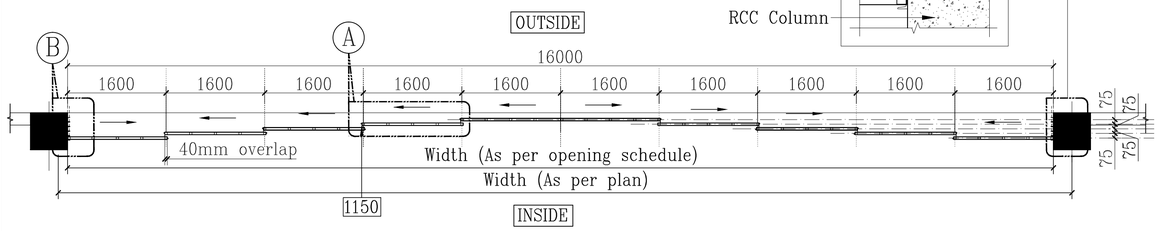


PLAN

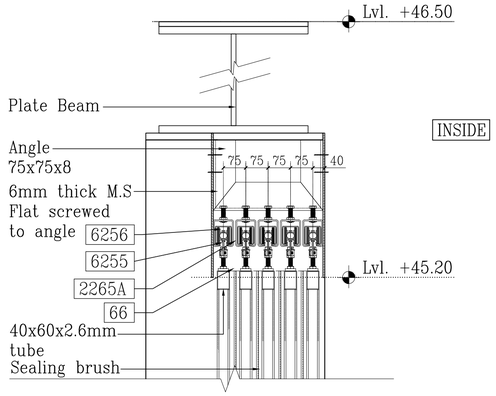

DETAIL D

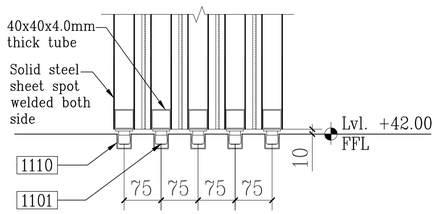


DETAIL C

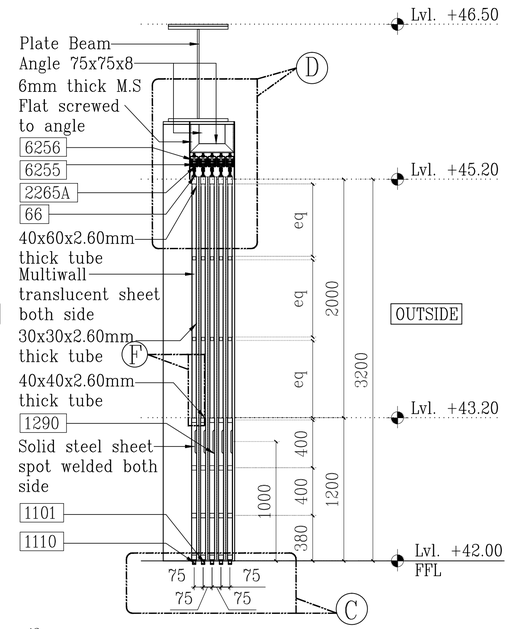


SECTION XX


DETAIL E




DETAIL F



DETAIL B

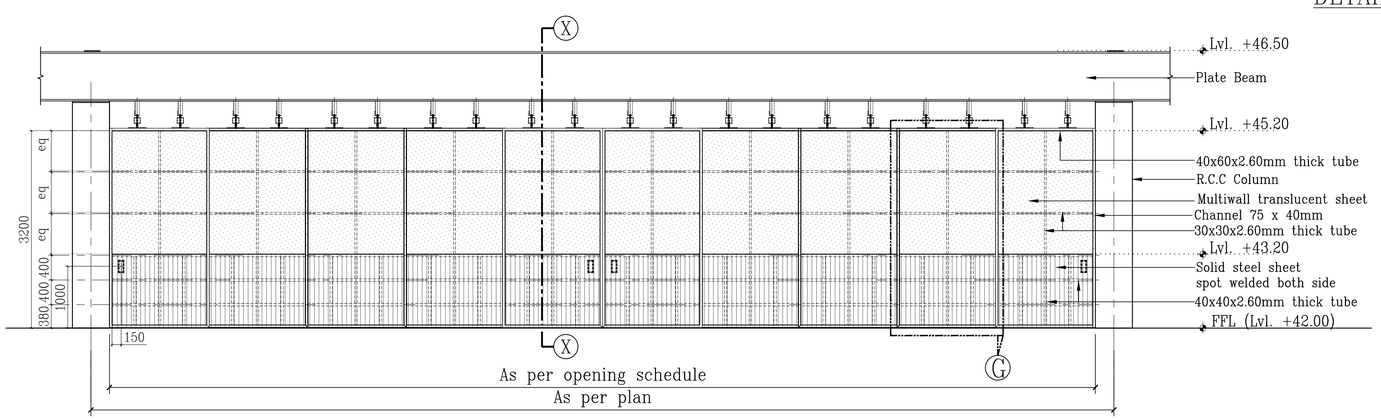

ELEVATION

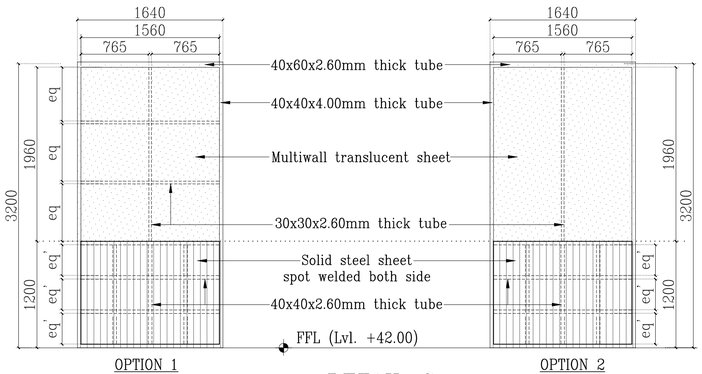

DETAIL G

DRAWN BY :	Akanksha
CHECKED BY :	J.Suthar
APPROVED BY :	
DESIGN ENGR. :	
DATE :	05/06/15
REV. NO.	R0

W E S