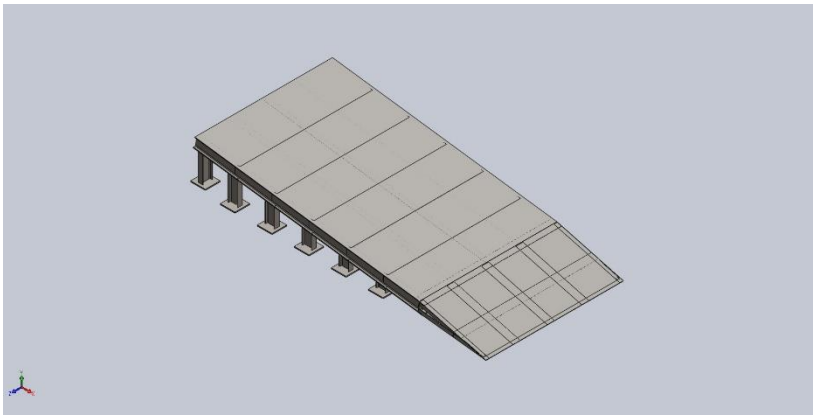


Simulation of Assem1

Date: 14 April 2026
Designer: Bharati Sabale
Study name: Static 1
Analysis type: Static

Table of Contents

Description 1
Assumptions ..... **Error! Bookmark not defined.**
Model Information ..... **Error! Bookmark not defined.**
Study Properties 2
Units 2
Material Properties 3
Loads and Fixtures 7
Connector Definitions 8
Interaction Information 8
Mesh information 8
Sensor Details 9
Resultant Forces 9
Beams 10
Study Results 18
Conclusion 20

Description

No Data

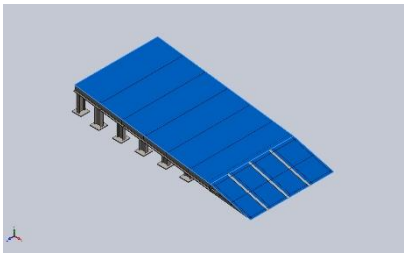
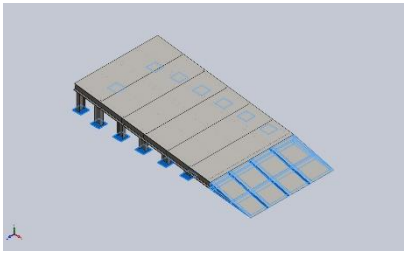
Study Properties

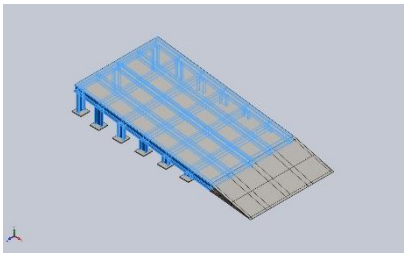
Study name	Static 1
Analysis type	Static
Mesh type	Mixed Mesh
Thermal Effect:	On
Thermal option	Include temperature loads
Zero strain temperature	298 Kelvin
Include fluid pressure effects from SOLIDWORKS Flow Simulation	Off
Solver type	Automatic
Inplane Effect:	Off
Soft Spring:	Off
Inertial Relief:	Off
Incompatible bonding options	Automatic
Large displacement	Off
Compute free body forces	On
Friction	Off
Use Adaptive Method:	Off
Result folder	SOLIDWORKS document (C:\Users\Design\Desktop)

Units

Unit system:	SI (MKS)
Length/Displacement	mm
Temperature	Kelvin
Angular velocity	Rad/sec
Pressure/Stress	N/m^2

Material Properties

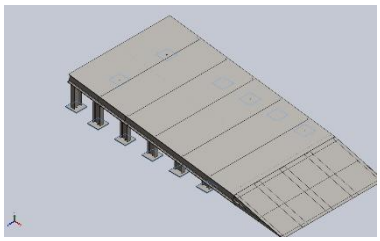
Model Reference	Properties	Components
	**Name:** AISI 304 **Model type:** Linear Elastic Isotropic **Default failure criterion:** Unknown **Yield strength:** 2.06807e+08 N/m^2 **Tensile strength:** 5.17017e+08 N/m^2 **Elastic modulus:** 1.9e+11 N/m^2 **Poisson's ratio:** 0.29 **Mass density:** 8,000 kg/m^3 **Shear modulus:** 7.5e+10 N/m^2 **Thermal expansion coefficient:** 1.8e-05 /Kelvin	SolidBody 1(Boss-Extrude1)(CHEQURED PLATE-1), SolidBody 1(Boss-Extrude1)(SS PLATE-1)
Curve Data:N/A		
	**Name:** AISI 4130 Steel, normalized at 870C **Model type:** Linear Elastic Isotropic **Default failure criterion:** Unknown **Yield strength:** 4.6e+08 N/m^2 **Tensile strength:** 7.31e+08 N/m^2 **Elastic modulus:** 2.05e+11 N/m^2 **Poisson's ratio:** 0.285 **Mass density:** 7,850 kg/m^3 **Shear modulus:** 8e+10 N/m^2	SolidBody 1(Angle iron 35 X 35 X 5(Cut-Extrude4)(DOCK RAMP2-1), SolidBody 2(Trim/Extend1[3])(DOCK RAMP2-1), SolidBody 3(Cut-Extrude2)(DOCK RAMP2-1), SolidBody 4(C channel 100 X 10(1))(DOCK RAMP2-1), SolidBody 5(Angle iron 35 X 35 X 5(Trim/Extend1[5])(DOCK RAMP2-1), SolidBody 6(Angle iron 35 X 35 X 5(1)[2])(DOCK RAMP2-1), SolidBody 7(Trim/Extend1[4])(DOCK RAMP2-1), SolidBody 8(Trim/Extend1[2])(DOCK RAMP2-1), SolidBody 9(Angle iron 35 X 35 X 5(1)[1])(DOCK RAMP2-1), SolidBody 10(Angle iron 35 X 35 X 5(Trim/Extend1[1])(DOCK RAMP2-1),

		SolidBody 1(Boss-Extrude1)(bottom plate-1), SolidBody 1(Boss-Extrude1)(bottom plate-11), SolidBody 1(Boss-Extrude1)(bottom plate-13), SolidBody 1(Boss-Extrude1)(bottom plate-15), SolidBody 1(Boss-Extrude1)(bottom plate-17), SolidBody 1(Boss-Extrude1)(bottom plate-19), SolidBody 1(Boss-Extrude1)(bottom plate-21), SolidBody 1(Boss-Extrude1)(bottom plate-23), SolidBody 1(Boss-Extrude1)(bottom plate-25), SolidBody 1(Boss-Extrude1)(bottom plate-3), SolidBody 1(Boss-Extrude1)(bottom plate-5), SolidBody 1(Boss-Extrude1)(bottom plate-7), SolidBody 1(Boss-Extrude1)(bottom plate-9)
Curve Data:N/A		
	**Name:** AISI 1045 Steel, cold drawn **Model type:** Linear Elastic Isotropic **Default failure criterion:** Unknown **Yield strength:** 5.3e+08 N/m^2 **Tensile strength:** 6.25e+08 N/m^2 **Elastic modulus:** 2.05e+11 N/m^2 **Poisson's ratio:** 0.29 **Mass density:** 7,850 kg/m^3 **Shear modulus:** 8e+10 N/m^2 **Thermal expansion coefficient:** 1.15e-05 /Kelvin	SolidBody 1(Cut-Extrude5[4])(sissior lift ramp-1), SolidBody 2(Cut-Extrude2[6])(sissior lift ramp-1), SolidBody 3(Cut-Extrude2[8])(sissior lift ramp-1), SolidBody 4(Cut-Extrude2[9])(sissior lift ramp-1), SolidBody 5(C channel 100 X 10(1)[2])(sissior lift ramp-1), SolidBody 6(Cut-Extrude2[5])(sissior lift ramp-1), SolidBody 7(Cut-Extrude2[10])(sissior lift ramp-1),

		SolidBody 8(Cut-Extrude2[11])(sissior lift ramp-1), SolidBody 9(Cut-Extrude5[6])(sissior lift ramp-1), SolidBody 10(C channel 100 X 10(1)[4])(sissior lift ramp-1), SolidBody 11(Cut-Extrude2[7])(sissior lift ramp-1), SolidBody 12(Cut-Extrude2[18])(sissior lift ramp-1), SolidBody 13(Sb beam 100 X 8(1)[4])(sissior lift ramp-1), SolidBody 14(Cut-Extrude2[12])(sissior lift ramp-1), SolidBody 15(Cut-Extrude2[13])(sissior lift ramp-1), SolidBody 16(Cut-Extrude5[5])(sissior lift ramp-1), SolidBody 17(C channel 100 X 10(1)[6])(sissior lift ramp-1), SolidBody 18(Cut-Extrude2[14])(sissior lift ramp-1), SolidBody 19(Cut-Extrude5[1])(sissior lift ramp-1), SolidBody 20(Cut-Extrude2[15])(sissior lift ramp-1), SolidBody 21(Cut-Extrude2[19])(sissior lift ramp-1), SolidBody 22(C channel 100 X 10(1)[1])(sissior lift ramp-1), SolidBody 23(Cut-Extrude5[3])(sissior lift ramp-1), SolidBody 24(C channel 100 X 10(1)[3])(sissior lift ramp-1), SolidBody 25(C channel 100 X 10(1)[5])(sissior lift ramp-1), SolidBody 26(Cut-Extrude5[2])(sissior lift ramp-1)

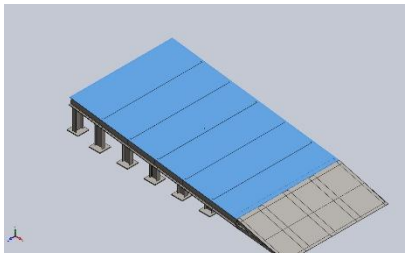
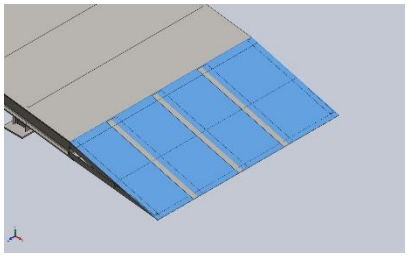
Curve Data:N/A

Loads and Fixtures

Fixture name	Fixture Image	Fixture Details
Fixed-1		**Entities:** 12 face(s) **Type:** Fixed Geometry

Resultant Forces

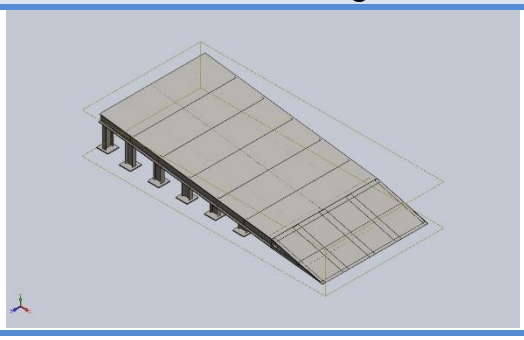
Components	X	Y	Z	Resultant
Reaction force(N)	975.833	4,893.1	-0.000187874	4,989.46
Reaction Moment(N.m)	0	0	0	1e-33

Load name	Load Image	Load Details
Force-1		**Entities:** 1 face(s) **Type:** Apply normal force **Value:** 2,500 N
Force-2		**Entities:** 1 face(s) **Type:** Apply normal force **Value:** 2,500 N

Connector Definitions

No Data

Interaction Information

Interaction	Interaction Image	Interaction Properties
Global Interaction		**Type:** Bonded **Components:** 1 component(s) **Options:** Independent mesh

Mesh information

Mesh type	Mixed Mesh
Mesher Used:	Blended curvature-based mesh
Jacobian points for High quality mesh	16 Points
Jacobian check for shell	Off
Maximum element size	60.4485 mm
Minimum element size	60.4485 mm
Mesh Quality	High

Sensor Details

No Data

Resultant Forces

Reaction forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	975.833	4,893.1	-0.000187874	4,989.46

Reaction Moments

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	1e-33

Free body forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	-0.10018	1.21569	0.00252438	1.21981

Free body moments

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	1e-33

Beams

Beam Forces

Beam Name	Joints	Axial(N)	Shear1(N)	Shear2(N)	Moment1(N.m)	Moment2(N.m)	Torque(N.m)
Beam-1(Angle iron 35 X 35 X 5(6))	1	-10.2136	-15.9877	-18.4297	-1.75411	1.71669	0.027898
	2	13.3591	-20.6731	-13.5966	-0.0688347	-1.67999	-0.0491056
	3	-16.213	-23.6939	-14.5492	-0.129581	2.07513	-0.0298923
	4	-13.3591	20.6731	13.5966	4.9702	-5.77236	0.0491062
	5	-38.1032	23.3013	18.5436	5.22491	-5.07286	-0.00193422
Beam-2(Cut-Extrude3[2])	1	-0.798906	1.62819	-0.161472	-0.0368578	-0.477458	-0.00487484
	2	0.798906	-1.62819	0.16146	-0.0160648	-0.0561883	0.00487524
	3	-41.0334	-27.1839	-35.3685	-12.1341	8.90178	-0.0124463
Beam-3(Cut-Extrude2)	1	5.54124	-0.380455	-0.0178857	-0.00351532	0.0672466	-4.05884e-05
	2	0.870361	0.303958	-0.0546779	-0.0120605	-0.066907	0.0051964
	3	-1.05343	0.24841	-0.0389491	0.00821416	0.0497906	0.00332813
	4	3.90942	0.427302	-0.0174919	-0.00303151	-0.0700632	0.00302048
	5	1.05342	-0.24842	0.0389534	0.00501027	0.0345497	-0.00332817
Beam-4(C channel 100 X 10(1))	1	395.003	54.6868	1,830.07	115.852	86.9888	-3.75394
	2	-251.659	237.23	1,459.23	85.7367	-11.0845	-2.92765
	3	411.054	-132.822	1,053.23	-77.3487	-24.076	-4.37233
	4	150.566	492.575	1,697.12	93.7933	58.6953	-4.13986
	5	-226.31	-218.447	1,140.67	86.2333	92.7089	-2.55454
Beam-5(Angle iron 35 X 35 X 5(1)[4])	1	-0.803671	0.138958	0.199157	0.0577061	-0.0795405	-0.00309585
	2	0.828372	-0.217178	-0.160945	0.00100559	-0.0010755	0.00696578
	3	15.492	-11.3101	-7.34817	-1.60786	2.42641	-0.0493063
	4	-0.828372	0.217178	0.160945	0.0140647	-0.0192602	-0.00696578
Beam-6(Angle iron 35 X 35 X 5(1)[2])	1	0.77817	0.302691	-0.73779	-0.151514	-0.0763457	0.00247437
	2	-0.794449	-0.24774	0.721382	-0.0384175	-0.0137115	-0.00400184
	3	-40.1756	-0.412232	3.67865	1.16511	0.332564	0.0242282
	4	0.794449	0.24774	-0.721382	-0.0378332	-0.0124748	0.00400184
Beam-7(Cut-Extrude3[3])	1	0.127501	3.03755	-0.097307	-0.031231	-0.818035	-0.0221977
	2	-0.127501	-3.03755	0.0973164	-0.000662296	-0.177535	0.0221977
	3	37.6064	6.98743	30.8757	10.3719	-5.69107	-0.0428007
Beam-8(Cut-Extrude3[1])	1	0.138977	-4.48726	0.0797097	0.0161324	1.26864	0.010088
	2	-0.138977	4.48726	-0.0797131	0.0099929	0.202078	-0.0100883

	3	47.9764	18.2216	31.3647	10.4773	-5.29225	0.0173833
Beam-9(Angle iron 35 X 35 X 5(1)[1])	1	1.06929	0.261272	0.731401	0.121357	-0.0553614	-0.0034277
	2	-1.09938	-0.227138	-0.65318	0.057088	-0.0255322	0.00567866
	3	-36.6494	0.184655	-1.17856	-0.682771	0.182766	-0.0463375
	4	1.09938	0.227138	0.65318	-0.0197578	0.012551	-0.00567866
Beam-10(Angle iron 35 X 35 X 5(1)[3])	1	-0.574499	-0.315635	0.25944	0.0783305	0.121449	0.0020187
	2	0.582463	0.332041	-0.202688	-0.00309335	-0.00509714	-0.00446495
	3	0	0	0	0	0	0
	4	-0.582463	-0.332041	0.202688	0.0220721	0.036188	0.00446495
Beam-11(Cut-Extrude5[4])	1	-3,164.05	1,017.98	-371.937	-22.7527	55.4812	-0.469023
	2	-596.995	-155.424	-24.0466	-2.30735	36.1834	0.103242
	3	-2,836.98	-530.626	-14.126	-2.40102	239.4	-1.06878
	4	4.12424	22.5909	4.60316	-0.271135	1.73168	0.0124084
	5	-115.296	-65.0909	-26.5988	-1.29859	9.10494	0.0284255
	6	-1,513.04	-175.306	-32.9724	-3.41476	88.929	-0.240838
	7	-2,642.54	109.999	23.4798	-0.410655	171.934	-0.426169
Beam-12(Cut-Extrude2[6])	1	21.868	-27.3696	37.1631	-5.6566	-7.11345	0.018884
	2	-21.868	27.3696	-37.1631	-5.49232	-1.09743	-0.018884
Beam-13(Cut-Extrude2[8])	1	-40.4037	-334.151	-39.1293	4.41804	-53.3918	-0.00932654
	2	40.4037	334.151	39.1293	5.36526	-30.154	0.00932654
Beam-14(Cut-Extrude2[9])	1	-77.4961	-494.94	-83.8331	7.99594	-67.2007	-0.0201296
	2	77.4961	494.94	83.8331	8.77479	-31.8117	0.0201296
Beam-15(C channel 100 X 10(1)[2])	1	-52.524	98.9542	5.28291	1.06939	-10.5436	0.0310086
	2	52.5241	-98.9542	-5.28291	0.713587	-22.8534	-0.0310089
	3	-286.685	44.8634	-9.41524	-1.86808	-15.2653	0.0890985
	4	-141.4	-90.705	2.7326	0.970884	11.3729	-0.0635998
	5	-347.348	-10.2598	18.3646	2.44101	-9.52373	-0.0810487
Beam-16(Cut-Extrude2[5])	1	-62.7587	-16.2392	42.6192	-6.71486	-4.98823	-0.0157168
	2	62.7587	16.2391	-42.6192	-6.07091	0.116487	0.0157175
Beam-17(Cut-Extrude2[10])	1	-484.848	-753.315	43.5441	0.875612	-84.8511	-0.106943
	2	484.848	753.315	-43.5441	-7.41043	-28.2017	0.106943
Beam-18(Cut-Extrude2[11])	1	3,225	1,910.43	1,457.05	-46.8386	-210.513	-0.0176153
	2	-3,225	-1,910.43	-1,457.05	-99.0094	401.743	0.0176153
	1	-1,625.65	150.163	-173.326	-10.43	25.0462	-0.191257

Beam-19(Cut-Extrude5[6])	2	-1,204.8	-133.254	-5.72805	-1.09988	53.3682	-0.0225616
	3	-2,242.06	-178.942	14.8175	1.11659	169.76	0.00302264
	4	-95.6604	76.9733	-0.0296876	0.0129186	6.40612	0.00345367
	5	-508.322	-69.7513	0.115004	-0.0989276	10.5079	0.0279032
	6	-1,923.61	-204.017	-11.4746	-1.32702	118.521	-0.145538
	7	-2,004.8	12.5741	4.2352	-0.312916	146.13	-0.0254156
Beam-20(C channel 100 X 10(1)[4])	1	-520.99	-1,092.01	-136.465	-19.545	156.944	1.05197
	2	520.99	1,092.01	136.491	-26.5169	211.609	-1.05184
	3	871.069	-322.444	-21.3748	-6.90795	199.046	0.159739
	4	960.915	193.806	10.6862	-1.80132	130.044	-0.0667074
	5	-80.4036	955.01	89.6155	15.0241	-142.879	-0.954504
Beam-21(Cut-Extrude2[7])	1	146.921	38.5952	-60.9146	-10.0553	-4.45897	0.00585372
	2	-146.921	-38.5952	60.9146	-8.21904	-7.1196	-0.00585412
Beam-22(Cut-Extrude2[18])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-23(Sb beam 100 X 8(1)[4])	1	53.1918	-5.42987	-3.3145	-0.195463	-2.56436	-0.0487661
	2	14.5456	-16.1455	6.30613	1.37561	3.48758	0.0437393
	3	-53.1918	5.42987	3.3145	-0.64352	3.9388	0.0487661
	4	74.8359	-17.1566	4.35096	0.787916	4.4986	-0.0159402
	5	96.8034	-13.5212	-4.87563	-0.743499	2.03382	0.00839998
Beam-24(Cut-Extrude2[12])	1	-1.04575e-08	-7.67889e-07	3.68988e-07	2.46264e-09	-2.35971e-10	-9.70108e-10
	2	1.04572e-08	7.67889e-07	-3.68987e-07	-9.47205e-08	-1.91759e-07	9.70108e-10
Beam-25(Cut-Extrude2[13])	1	-147.702	-307.129	3.32638	0.650725	-47.4646	-0.00850575
	2	147.702	307.129	-3.32638	-1.48396	-29.4689	0.00850727
Beam-26(Cut-Extrude5[5])	1	-3,166.81	1,053.1	258.274	12.7575	75.8027	1.16225
	2	-659.35	-178.039	21.062	2.1503	42.695	-0.0853886
	3	-3,078.46	-511.094	-1.05702	1.88494	245.529	1.05112
	4	14.1879	32.525	-7.86389	0.162366	2.54125	0.0395118
	5	-160.955	-82.3436	30.1693	2.19128	10.6384	0.0064761
	6	-1,740.62	-188.672	21.9344	3.01241	96.3333	0.0401754
	7	-2,907.7	157.534	-23.3567	-1.22501	170.217	0.728135
Beam-27(C channel 100 X 10(1)[6])	1	166.922	-32.3338	11.0568	2.05854	97.8324	-0.287653
	2	401.656	148.62	-52.9956	-13.6387	23.6537	0.383561
	3	-537.738	205.22	-50.179	13.403	-14.6387	0.132628
	4	87.2425	-51.5855	-42.6115	-5.77188	92.4722	0.492349

	5	537.738	-205.219	50.1799	3.53289	83.9003	-0.132572
Beam-28(Cut-Extrude2[14])	1	-779.025	-573.399	-273.167	17.5709	-61.3382	0.0136515
	2	779.025	573.399	273.167	23.4257	-24.7169	-0.0136515
Beam-29(Cut-Extrude5[1])	1	-1,804.79	681.724	-186.712	-11.6159	16.2786	0.267931
	2	-82.4168	-100.557	17.4801	1.3381	20.8624	0.104439
	3	-27.2006	-186.69	6.62139	0.3675	29.5683	0.120842
	4	-38.6253	56.2662	19.2346	-1.4833	9.62873	0.0211919
	5	-392.161	-278.888	20.9949	0.0159491	33.8667	0.126916
	6	-2,607.44	-847.078	16.9029	3.27817	176.868	-0.818742
	7	-3,830.46	1,205.03	57.5064	4.66972	168.225	-0.621566
Beam-30(Cut-Extrude2[15])	1	3,385.39	1,669.04	-1,025.59	53.6376	-150.363	0.190975
	2	-3,385.39	-1,669.04	1,025.59	100.756	401.623	-0.190975
Beam-31(Cut-Extrude2[19])	1	6.74322e-12	2.10304e-12	2.27533e-14	-5.0684e-16	1.52007e-14	-2.1483e-17
	2	-6.74322e-12	-2.10304e-12	-2.27533e-14	-5.20515e-16	3.26982e-13	2.1483e-17
Beam-32(C channel 100 X 10(1)[1])	1	4.17824	48.1702	8.5595	1.41969	-4.67036	-0.0835778
	2	-4.17824	-48.1702	-8.5595	1.46914	-11.5871	0.0835776
	3	-140.42	52.7109	-6.90874	-1.12002	-16.6237	-0.0220848
	4	-35.5606	-37.7544	-2.35562	-0.234102	4.2791	0.0341179
	5	-161.305	-37.5843	12.4716	1.8136	-3.51194	0.0121788
Beam-33(Cut-Extrude5[3])	1	-1,716.21	353.806	-5.40205	-1.08484	19.9285	-0.0509971
	2	-736.17	-147.266	-2.54741	-0.620448	63.1879	0.00178364
	3	-2,005.2	-126.678	-1.67829	-0.685228	166.029	-0.023912
	4	190.324	60.669	0.634965	-0.0617081	9.40506	-0.00813159
	5	-190.324	-60.669	-0.634966	-0.184896	14.1572	0.00813154
	6	-1,438.97	-208.921	-2.09283	-0.655231	131.345	-0.00794865
	7	-2,087.44	40.5211	-4.99888	-1.35047	143.664	-0.0334849
Beam-34(C channel 100 X 10(1)[3])	1	-113.818	-22.8678	-20.7657	-4.06792	3.38692	0.4441
	2	113.818	22.8678	20.7657	-2.94051	4.33097	-0.4441
	3	-57.4419	-168.767	-27.9572	-5.62962	58.9637	0.280662
	4	-193.253	187.492	25.6469	2.70046	0.858817	-0.235304
	5	-344.537	108.633	40.5087	7.81077	-29.1337	-0.520364
Beam-35(C channel 100 X 10(1)[5])	1	716.444	-501.756	-48.2431	-6.8113	143.467	-0.206789
	2	1,635.54	-317.608	1.92792	-3.27312	200.191	-0.0394403
	3	1,550.11	313.514	-18.428	-6.61488	99.4128	0.135895
	4	-716.444	501.758	48.2298	-9.46993	25.8754	0.20684

	5	769.602	508.139	32.05	6.54851	-28.7326	0.446052
Beam-36(Cut-Extrude5[2])	1	-1,959.68	580.307	58.5388	0.56581	47.4611	-0.186646
	2	-59.7196	0.931736	-25.2849	2.53352	5.23467	0.0128883
	3	-47.878	-58.3198	-4.75384	0.172289	10.846	-0.0130727
	4	-2,278.72	-1,117.12	17.0672	1.05708	192.172	0.301472
	5	28.8063	-38.9111	-12.7112	-0.888397	4.24662	-0.129665
	6	-545.606	-189.623	3.98601	0.317579	19.2363	-0.0758158
	7	-4,072.39	1,224.04	-62.1464	-5.78106	170.946	0.73174

Beam Stresses

Beam Name	Joints	Axial(N/m^2)	Bending Dir1(N/m^2)	Bending Dir2(N/m^2)	Torsional (N/m^2)	Upper bound axial and bending(N/m^2)
Beam-1(Angle iron 35 X 35 X 5(6))	1	-14,275.6	-441,307	-12,210.2	314,258	467,793
	2	-18,672.1	260,062	-341,326	553,151	620,060
	3	-22,661.2	238,061	-382,017	-336,722	642,739
	4	-18,672.1	1.12426e+06	212,251	553,158	1.35518e+06
	5	-53,257.3	1.32014e+06	28,434.1	-21,788	1.40183e+06
Beam-2(Cut-Extrude3[2])	1	-933.002	-60,035.2	93,797.7	-54,912.8	154,766
	2	-933.002	9,268.22	-12,342.8	-54,917.2	22,544.1
	3	-47,920.8	-1.28936e+06	-322,582	-140,202	1.65987e+06
Beam-3(Cut-Extrude2)	1	64,046.4	21,632.3	-281,870	-3,746.78	367,548
	2	10,059.8	-561,116	522,617	479,688	1.09379e+06
	3	12,175.6	-391,178	377,074	-307,225	780,428
	4	45,185.6	-254,706	397,873	278,825	697,765
	5	12,175.6	247,523	-250,919	-307,228	510,618
Beam-4(C channel 100 X 10(1))	1	301,489	1.47302e+07	-2.17545e+06	-1.11735e+07	1.72071e+07
	2	-192,081	1.09012e+07	277,206	-8.71403e+06	1.13705e+07
	3	-313,740	9.83466e+06	-602,102	1.30141e+07	1.07505e+07
	4	114,921	1.19255e+07	-1.46787e+06	-1.23221e+07	1.35083e+07
	5	-172,732	1.09643e+07	-2.3185e+06	-7.60347e+06	1.34555e+07
Beam-5(Angle iron 35 X 35 X 5(1)[4])	1	-2,514.34	12,651.1	51,855.4	-34,891.2	67,020.8
	2	-2,591.62	-426.294	-551.828	-78,506.6	3,569.74
	3	48,467.7	-213,202	-1.68292e+06	-555,698	1.94459e+06
	4	-2,591.62	3,167.08	12,495.7	-78,506.6	18,254.4
Beam-6(Angle iron 35 X 35 X 5(1)[2])	1	2,434.56	-121,031	-13,936.1	27,872.6	137,402
	2	2,485.49	34,430.6	9,929.74	45,078.8	46,845.8
	3	-125,692	1.09939e+06	395,473	272,920	1.62055e+06
	4	2,485.49	-34,588.4	-10,943.4	45,078.8	48,017.2
	1	148.902	-96,862.8	157,154	-250,046	254,166

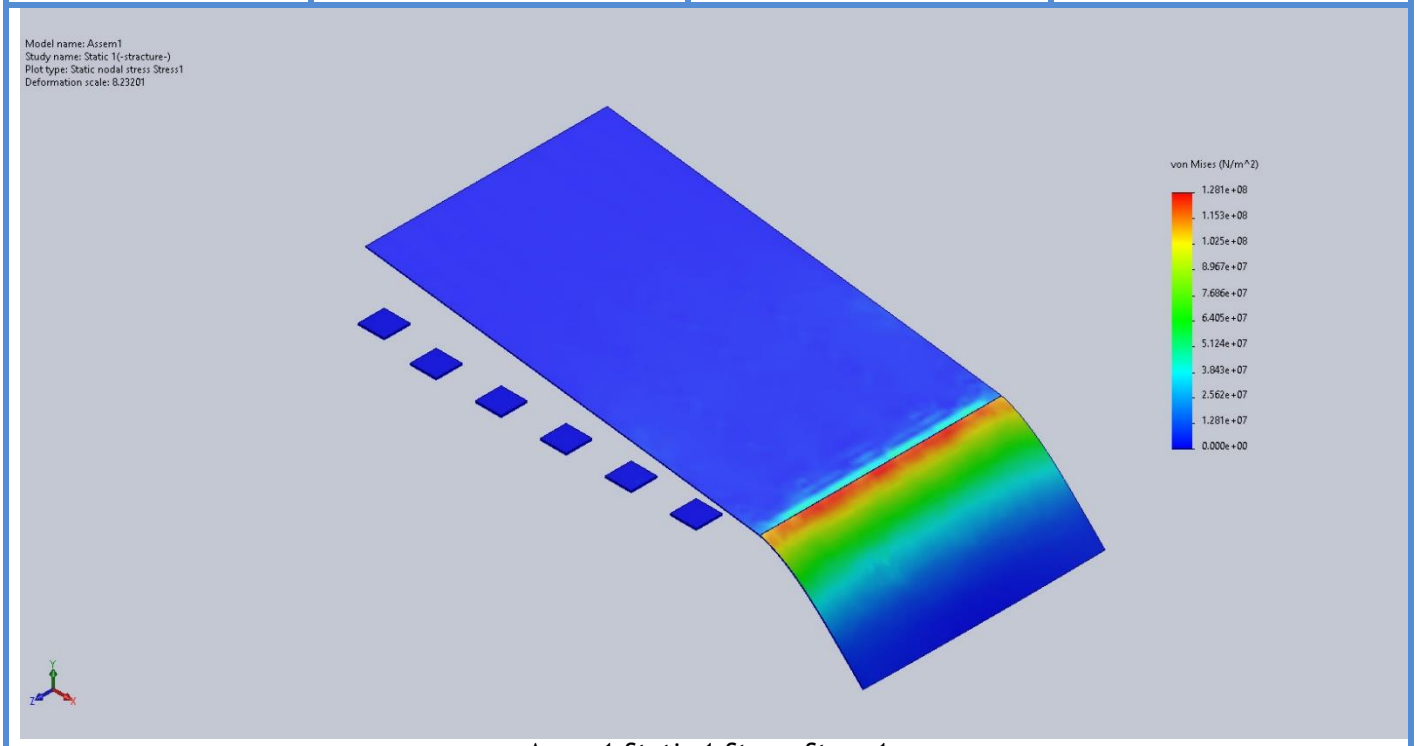
Beam-7(Cut-Extrude3[3])	2	148.902	19,872.8	-33,426.3	-250,046	53,448
	3	43,918.6	1.31546e+06	-84,577.6	-482,129	1.44395e+06
Beam-8(Cut-Extrude3[1])	1	162.304	144,150	-240,128	113,636	384,440
	2	162.304	-24,355.9	39,075.1	113,639	63,593.3
	3	56,029.3	1.37963e+06	-171,230	195,815	1.60689e+06
Beam-9(Angle iron 35 X 35 X 5(1)[1])	1	3,345.35	100,778	-17,719.5	-38,611.4	121,843
	2	3,439.48	-47,745.5	8,913.66	-63,967.4	60,098.7
	3	-114,660	-652,290	245,484	-521,970	1.01243e+06
	4	3,439.48	-14,062.7	-1,122.6	-63,967.4	18,624.8
Beam-10(Angle iron 35 X 35 X 5(1)[3])	1	-1,797.36	8,238.13	-85,659.3	22,750.9	95,694.8
	2	-1,822.28	125.85	-3,723.71	50,320.4	5,671.84
	3	0	0	0	0	0
	4	-1,822.28	1,018.54	-26,364	50,320.4	29,204.8
Beam-11(Cut-Extrude5[4])	1	-2.90271e+06	-4.71316e+06	-1.58741e+06	-1.43645e+06	9.20328e+06
	2	-547,687	-477,961	-1.03527e+06	316,194	2.06091e+06
	3	-2.60266e+06	-497,363	-6.84962e+06	-3.27328e+06	9.94965e+06
	4	-3,783.6	56,164.9	49,546.1	-38,002.5	109,495
	5	-105,773	-269,000	-260,507	87,057.2	635,281
	6	-1.38807e+06	-707,359	-2.5444e+06	-737,604	4.63983e+06
	7	-2.42428e+06	-85,066.1	-4.91931e+06	-1.30521e+06	7.42866e+06
Beam-12(Cut-Extrude2[6])	1	-20,061.8	1.17175e+06	-203,527	-57,855.2	1.39534e+06
	2	-20,061.8	-1.13772e+06	31,399.3	-57,855.2	1.18918e+06
Beam-13(Cut-Extrude2[8])	1	37,066.5	-915,183	-1.52763e+06	28,573.9	2.47988e+06
	2	37,066.5	1.1114e+06	862,756	28,573.9	2.01122e+06
Beam-14(Cut-Extrude2[9])	1	71,095.3	-1.65634e+06	-1.92272e+06	61,671.4	3.65015e+06
	2	71,095.3	1.81767e+06	910,185	61,671.4	2.79895e+06
Beam-15(C channel 100 X 10(1)[2])	1	-40,089.3	135,970	263,677	92,562.1	439,737
	2	-40,089.3	-90,730.5	-571,524	92,563	702,344
	3	-218,814	-237,522	381,758	265,963	838,094
	4	-107,924	123,446	-284,417	-189,848	515,787
	5	-265,115	310,369	238,172	-241,934	813,656
Beam-16(Cut-Extrude2[5])	1	57,575.1	1.39096e+06	-142,722	48,151.7	1.59126e+06
	2	57,575.2	-1.25757e+06	-3,332.89	48,154	1.31848e+06
Beam-17(Cut-Extrude2[10])	1	444,802	-181,380	-2.42773e+06	327,642	3.05391e+06
	2	444,802	-1.53505e+06	806,897	327,642	2.78675e+06
Beam-18(Cut-Extrude2[11])	1	-2.95863e+06	9.70249e+06	-6.02312e+06	53,968.3	1.86842e+07
	2	-2.95863e+06	-2.05095e+07	-1.14945e+07	53,968.3	3.49627e+07
Beam-19(Cut-Extrude5[6])	1	-1.49138e+06	-2.16055e+06	-716,612	-585,753	4.36854e+06
	2	-1.10529e+06	-227,836	-1.52695e+06	-69,098.2	2.86008e+06
	3	-2.05688e+06	231,299	-4.85713e+06	9,257.28	7.1453e+06
	4	87,759.4	-2,676.05	183,290	-10,577.4	273,725
	5	-466,337	-20,492.6	-300,647	85,457.8	787,477
	6	-1.76473e+06	-274,888	-3.39107e+06	-445,732	5.43069e+06
	7	-1.83922e+06	-64,819.6	-4.18101e+06	-77,839.2	6.08505e+06

Beam-20(C channel 100 X 10(1)[4])	1	-397,649	-2.4851e+06	-3.92491e+06	3.14053e+06	6.80766e+06
	2	-397,649	3.37156e+06	5.29198e+06	3.14014e+06	9.06119e+06
	3	664,849	-878,326	-4.9778e+06	476,884	6.52098e+06
	4	733,424	-229,032	-3.25218e+06	-199,147	4.21464e+06
	5	-61,368.6	1.91028e+06	3.57315e+06	-2.84956e+06	5.5448e+06
Beam-21(Cut-Extrude2[7])	1	134,786	-2.08293e+06	127,579	17,934.1	2.3453e+06
	2	134,786	1.70255e+06	-203,703	17,935.3	2.04104e+06
Beam-22(Cut-Extrude2[18])	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-23(Sb beam 100 X 8(1)[4])	1	48,798.5	-40,489.6	73,370.5	-149,372	162,659
	2	13,344.2	284,954	-99,785.4	133,975	398,084
	3	48,798.5	133,303	112,695	-149,372	294,797
	4	68,654.8	163,215	-128,713	-48,825.2	360,582
	5	88,808	-154,014	-58,190.8	25,729.4	301,012
Beam-24(Cut-Extrude2[12])	1	9.59381e-06	-0.000510129	-6.75152e-06	0.00297213	0.000526475
	2	9.59352e-06	-0.0196211	0.00548654	0.00297213	0.0251172
Beam-25(Cut-Extrude2[13])	1	135,503	-134,796	-1.35804e+06	26,059.2	1.62834e+06
	2	135,502	-307,398	843,155	26,063.8	1.28605e+06
Beam-26(Cut-Extrude5[5])	1	-2.90525e+06	2.64267e+06	-2.16884e+06	3.55957e+06	7.71676e+06
	2	-604,891	445,428	-1.22157e+06	-261,515	2.27189e+06
	3	-2.8242e+06	390,461	-7.02499e+06	3.21923e+06	1.02397e+07
	4	-13,016.1	-33,633.6	72,709.3	-121,011	119,359
	5	-147,661	453,917	-304,382	19,834	905,960
	6	-1.59685e+06	624,012	-2.75626e+06	123,043	4.97712e+06
	7	-2.66754e+06	-253,757	-4.8702e+06	2.23002e+06	7.79149e+06
Beam-27(C channel 100 X 10(1)[6])	1	127,404	261,739	-2.44662e+06	-858,733	2.83576e+06
	2	306,566	-1.73413e+06	-591,539	1.14505e+06	2.63224e+06
	3	410,432	-1.70416e+06	-366,088	-395,935	2.48068e+06
	4	66,588.4	-733,879	-2.31257e+06	1.46981e+06	3.11304e+06
	5	410,432	449,198	-2.0982e+06	-395,768	2.95783e+06
Beam-28(Cut-Extrude2[14])	1	714,682	-3.63977e+06	-1.75499e+06	-41,824.2	6.10943e+06
	2	714,682	4.85256e+06	707,192	-41,824.2	6.27444e+06
Beam-29(Cut-Extrude5[1])	1	-1.65572e+06	-2.4062e+06	-465,757	820,579	4.52768e+06
	2	-75,609.6	277,184	-596,907	319,860	949,701
	3	-24,954	76,126.6	-845,999	370,097	947,080
	4	35,435	307,262	275,494	-64,903.3	618,191
	5	-359,770	3,303.8	-968,981	388,698	1.33206e+06
	6	-2.39208e+06	679,064	-5.0605e+06	-2.50752e+06	8.13164e+06
	7	-3.51408e+06	967,320	-4.8132e+06	-1.90364e+06	9.2946e+06
Beam-30(Cut-Extrude2[15])	1	-3.10577e+06	-1.11109e+07	-4.30215e+06	-585,092	1.85188e+07
	2	-3.10577e+06	2.08713e+07	-1.14911e+07	-585,092	3.54681e+07
Beam-31(Cut-Extrude2[19])	1	-2.98934e-08	2.99583e-09	8.06572e-09	3.75502e-10	4.0955e-08
	2	-2.98934e-08	-3.07666e-09	-1.73501e-07	3.75502e-10	2.06471e-07
	1	3,189.07	180,510	116,798	-249,483	300,497

Beam-32(C channel 100 X 10(1)[1])	2	3,189.06	-186,797	-289,773	-249,483	479,759
	3	-107,176	-142,408	415,729	-65,924.1	665,314
	4	-27,141.9	-29,765.4	-107,013	101,843	163,920
	5	-123,117	230,595	87,827.6	36,354.2	441,540
Beam-33(Cut-Extrude5[3])	1	-1.57446e+06	-224,722	-570,188	-156,297	2.36937e+06
	2	-675,366	-128,524	-1.80791e+06	5,466.53	2.6118e+06
	3	-1.83958e+06	-141,943	-4.75037e+06	-73,285.8	6.73189e+06
	4	-174,605	12,782.7	269,094	24,921.8	456,482
	5	-174,605	-38,300.7	-405,061	24,921.7	617,966
	6	-1.32012e+06	-135,729	-3.758e+06	-24,361.2	5.21385e+06
	7	-1.91503e+06	-279,746	-4.11048e+06	-102,625	6.30525e+06
Beam-34(C channel 100 X 10(1)[3])	1	-86,872.3	-517,226	-84,701	1.32566e+06	688,799
	2	-86,872.3	373,878	108,310	1.32566e+06	569,060
	3	-43,842.9	-715,791	-1.47458e+06	837,788	2.23422e+06
	4	-147,502	343,356	-21,477.6	-702,394	512,335
	5	-262,970	993,118	728,583	-1.55331e+06	1.98467e+06
Beam-35(C channel 100 X 10(1)[5])	1	546,830	-866,037	-3.58787e+06	-617,346	5.00074e+06
	2	1.24833e+06	-416,167	-5.00644e+06	-117,744	6.67094e+06
	3	1.18313e+06	-841,064	-2.48614e+06	405,699	4.51034e+06
	4	546,830	1.20408e+06	647,101	-617,497	2.39801e+06
	5	587,403	832,626	718,553	1.33164e+06	2.13858e+06
Beam-36(Cut-Extrude5[2])	1	-1.79782e+06	117,206	-1.35794e+06	-571,632	3.27297e+06
	2	54,787.1	-524,812	149,773	-39,472.4	729,372
	3	-43,923.5	35,689.1	-310,321	-40,037	389,934
	4	-2.09051e+06	218,971	-5.49837e+06	923,302	7.80785e+06
	5	26,427	-184,029	-121,503	-397,119	331,959
	6	-500,542	65,785.5	-550,383	-232,197	1.11671e+06
	7	-3.73604e+06	-1.19753e+06	-4.89104e+06	2.24106e+06	9.82461e+06

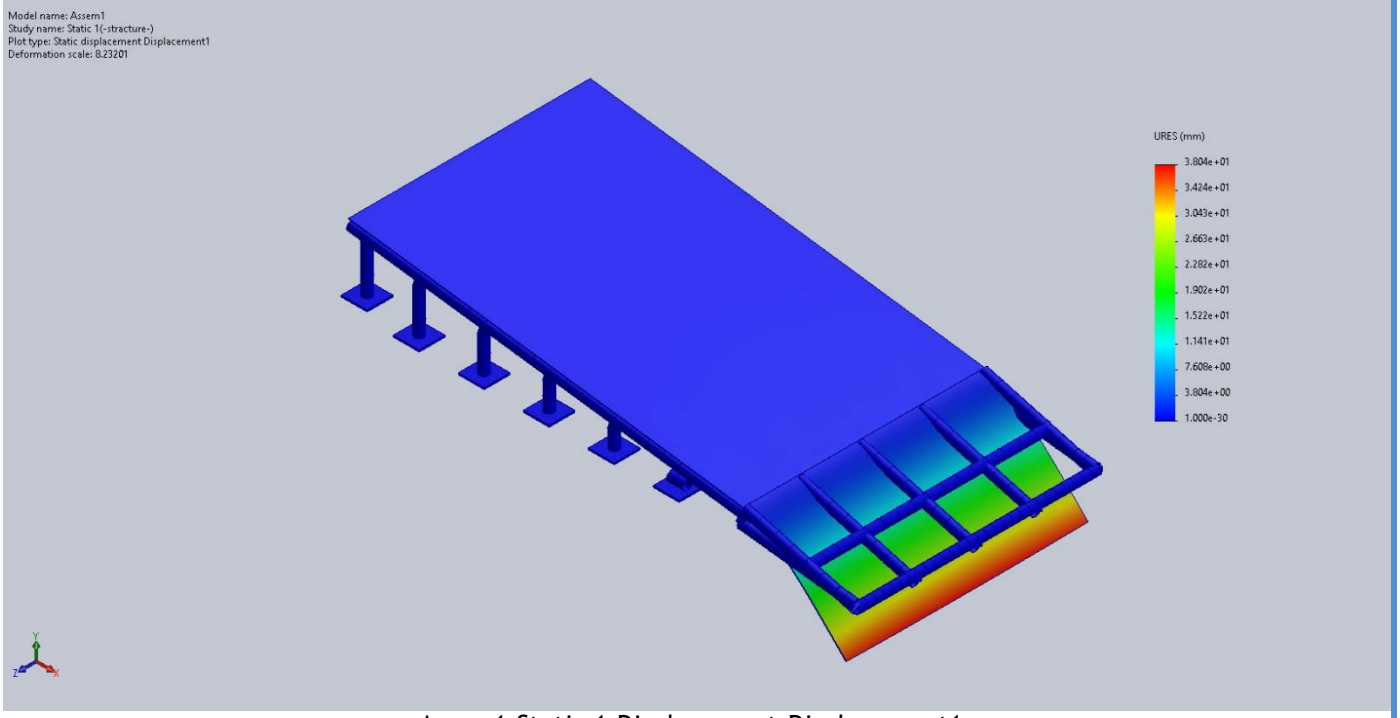
Study Results

Name	Type	Min	Max
Stress1	VON: von Mises Stress	0.000e+00N/m^2 Node: 16427	1.281e+08N/m^2 Node: 14030



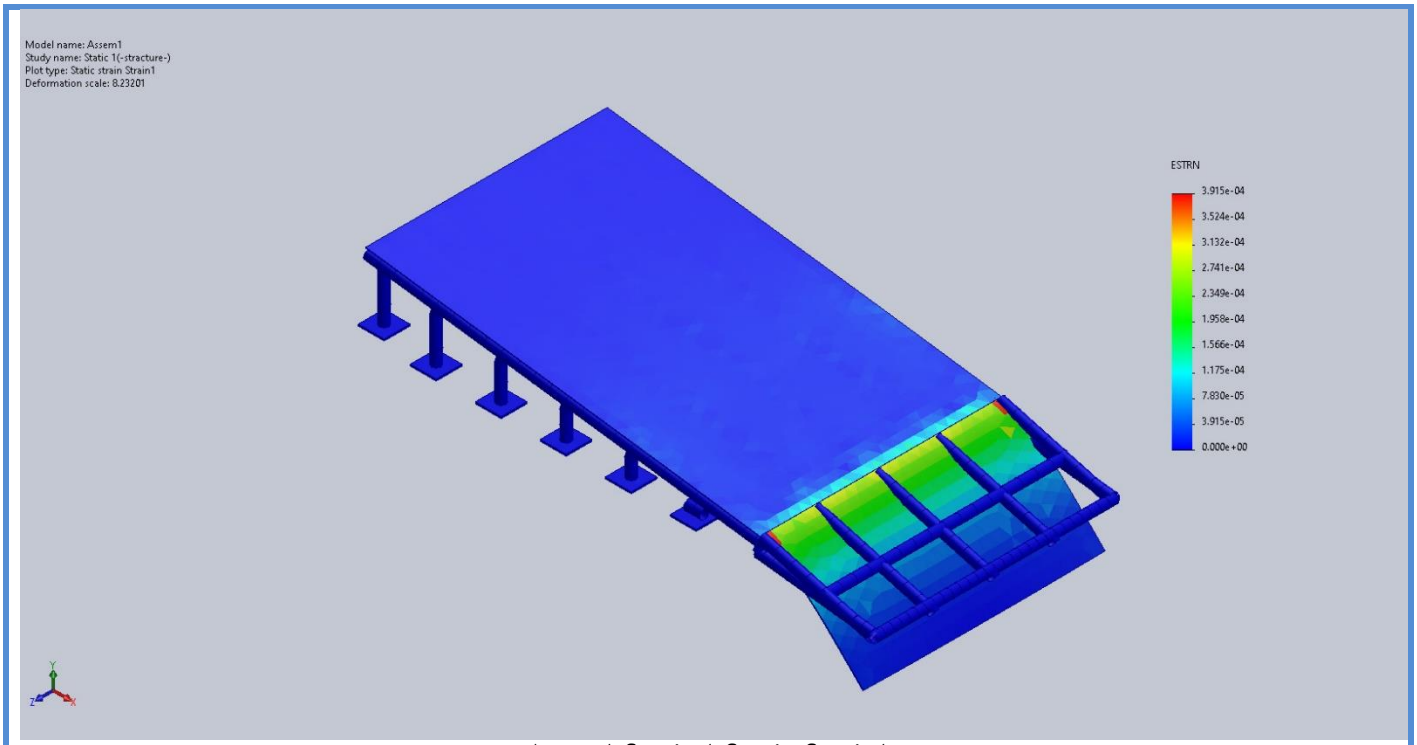
Assem1-Static 1-Stress-Stress1

Name	Type	Min	Max
Displacement1	URES: Resultant Displacement	0.000e+00mm Node: 16252	3.804e+01mm Node: 12453



Assem1-Static 1-Displacement-Displacement1

Name	Type	Min	Max
Strain1	ESTRN: Equivalent Strain	0.000e+00 Element: 7954	3.915e-04 Element: 6511



Assem1-Static 1-Strain-Strain1

Conclusion