
ALBANY
ASSA ABLOY
The inventors of high-speed roll doors

In 1968 we invented the first high speed roll up door, and today we are still manufacturing the most innovative fabric, metal, and rubber high speed industrial doors on the market. **Albany** is the leading High Performance Door Solutions product brand for **ASSA ABLOY Entrance Systems.**




# History and present of Albany brand




- NOMAFA (Sweden), Schieffer (Germany) and M&I (Canada)
- Production of Albany doors for the world market since 2002
- Plants in Lippstadt (Germany), Lawrenceville (USA) and Panyu City (China)
- Large number of installations sold all around the world
- Until end of 2011 ADS part of Albany International Corp.
- Since 2012 integrated of Assa Abloy group
- Part of direct sales channel Assa Abloy Entrance Systems



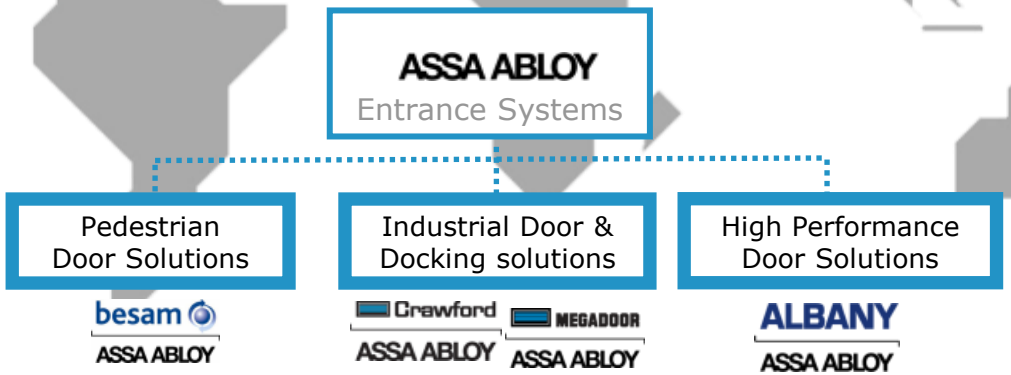

- High-Speed doors ***lower energy costs***
- High-Speed doors ***decrease maintenance costs***
- High-Speed doors ***improve work environments***
- High-Speed doors ***enhance workflow***
- High-Speed doors ***improve safety and security***
- High-Speed doors ***operate at higher cycles***

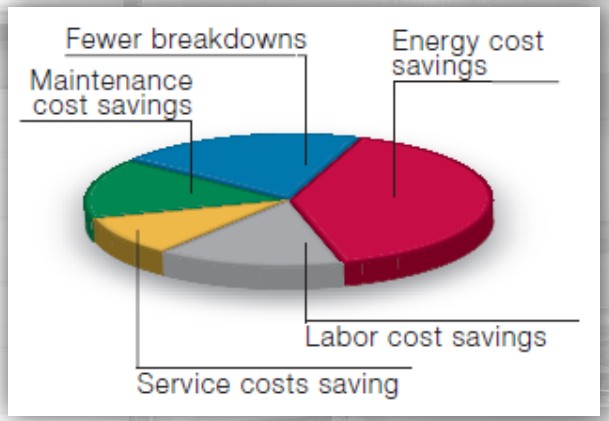



Automatically green
ASSA ABLOY ENTRANCE SYSTEMS

# Albany High-Speed Doors

The high quality version of high speed doors

- Higher speeds, increased durability and improved reliability
- Engineered to withstand harshest environmental conditions
- Made of strong, long-lasting fabrics, and durable mechanical and electrical components.
- Built to last. Plenty of Albany doors in use today have been operating for well over one million cycles
- Proven to save money by lower maintenance costs, enhancement of workflow, reliability of products, dependable service and maintenance
- Customized functionality beyond the standard range
- Improved safety standard by using advanced safety features

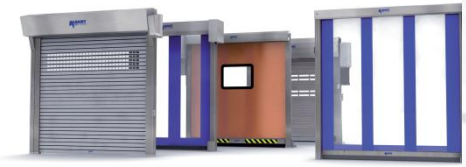

# **Albany** – The world's leading high speed door manufacturer

Our high performance door solutions are primarily used in industrial and commercial applications like:

**Automotive**

**Cold Storage**

**Food & Pharmaceutical**

**Transport & Logistics**

**Retail**

**Parking**

**Waste Management and Mining**







# Interior doors



**RR300S/I**



**RR300Plus**

# RR300

The modular high performance door
You define the setup - we build your door



Modular system allows customized configuration

Fast opening and closing speed saves energy costs

Space saving construction for almost unlimited possibilities of installation

Fast and simple installation

Maintenance-friendly design result in minimal service costs

Specification:

- max. 4000x4200 mm
- Wind class 1
- Galvanized / Stainless steel
- *ACS25* / ACS50 / *MCC*
- Contact safety edge & Photocell
- Coily cable
- Not balanced
- Manual opening by hand crank
- *Manual crash system*
- *Flexible bottom profile*

# RR300+

The economical door for interior applications



Space saving design enables installation onto door openings with restricted space

Integrated balancing system allows manual or automatic egress.

Specification:

- max. 5000x5000 mm
- Wind class 1
- Aluminium / Stainless steel
- ACS50 / MCC
- Contact safety edge/Photocell
- Integrated cable chain
- Conterbalance system
- *Manual crash system*
- *Flexible bottom profile*
- *Automatic self opening*
- *Curtain tension system*
- *RR300+ „Sealed"*
- *RR300 + „F+R"*

# Exterior doors – Flexible door blades

**RR392**



**RR355**



**RR450**
**RR600**
**RR600G**



**RR600Ultra**



# *RR392*

The high performance door for tansport and logistics in the manufacturing industry



Robust industrial door that offers good value for money

Self-opening by counterweights once the brake has been released

Optional knock-out capability also available

Specification:

- max. 6000x6000 mm
- Wind class 2
- Galvanized side frames
- ACS50 / *MCC*
- Contact safety edge & Photocell
- Coily cable / *Integrated cable chain*
- *Manual crash system*



# RR355

## Sophisticated technology to assure safety

Advanced safety features for protection of people and goods

Minimized damages at collisions through the self repairing knock-out-capability

High wind resistance by curtain tensioning and windbreak tabs in the side frames

Specification:

- max. 4000x4200 mm
- Wind class 2
- Aluminium side frames
- ACS50 / *MCC*
- Pre-running photocell / *Contact safety edge*
- Automatic crash system
- Integrated cable chain
- Balanced door / Self opening by lever

# RR450/RR600/RR600G

***The high performance door for the manufacturing industry***




Pre-running safety photocell offers maximum safety

Curtain tensioning system ensures safe opening and closing and increases wind resistance

Counter-balance spring system, offers drop down safety and enables easy manual opening when power fails

<u>Specification</u>:

- Max. 7500x5000 mm
- Wind class 2
- Aluminium side frames
- MCC / *ACS50*
- Pre-running safety edge
- Integrated cable chain
- Automatic crash system
- *Travelling wind bar*
- *RR450/600 EX (ATEX certified)*

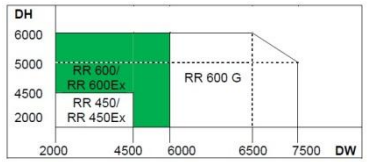




# *RR600Ultra*

Engineered elegance with state-of-the-art technology

High speeds combined with high wind resistance, substantial safety features and reliable performance in high traffic areas

Variety of features and options configured for a wide range of interior or rugged exterior applications.

Specification:

- max. 6000x6000 mm
- Wind class 3 (BBS-system)
- Opening speed up to 3,2 m/s
- Aluminium side frames
- MCC
- Contact safety edge
- Integrated cable chain
- Integrated display in side frame
- *Pre-running safety edge*
- *Automatic crash system*
- *„Frigo" version (Installation outside freezer area)*
- *Upside-down version*

# RR3000
# RR3000R
# RR3000GL
# RR3000XXL
# RR3000ISO

***RapidRoll 3000 series combines the greatest functionality with modern design***



Outstanding engineering makes the doors extremely fast, safe, robust and guarantees an extremely long service life with low maintenance needs

Stylish modern design, achieved by using anodized aluminium slats and large windows, ensures an attractive appearance and perfect integration into building facades

Specification:

- max. 8000x6000 mm (max. 36m²)
- Wind class 3-4
- Galvanized side frames / Stainless steel
- Anodized aluminium slats
- MCC
- Open/Close up to 2,2/0,7 m/s
- Pre-running safety edge / Contact ege
- Unique „Disc drive" system
- U-value, complete door: 1,9
- Full transparency and high safety
- Reduced lintel version
- Thermal decoupled lamellas
- Window lamellas / Perforation / Isolation
- Powdercoatings in any RAL colour

## RR3000 Base

- Door for busy doorways
- Double-walled aluminium slats
- High opening speed
- Up to wind class 4



## RR3000 R

- Minimum lintel space
- Motor built into side frame
- Underground garages
- Perforated lamellas



## RR3000 XXL

- The “Big one”
- Up to 8000 mm width
- Up to 6000 mm height
- Reinforced components



## RR3000 ISO

- Insulated slats
- Thermal isolation
- U-Value 1,0 K
- Double glazed windows



## RR3000 GL

- Large, crystal-clear panels
- 70 % transparency
- “Hammer proof” PC material
- Car dealerships



# Focus on applications

## Discover niches



# Application doors



# RP300

The machine protection door for automated processes



Machine protection door with flexible doorblade

Up to 5 cycles per minute

High reliability even after high number of cycles

Safety limit switches

Specification:

- max. 4000x3500 mm
- Alumnium side frames
- PVC / *RollTex fabric material*
- ACS50 / *MCC*
- Contact safety edge / *Pre-running*
- Integrated cable chain
- „Schmersal" safety switch
- *Field-Bus systems*
- *Customized functions*
- *„Divi-Roll" up to 8.000 mm width*




# RP2000

***Machine protection door with aluminium door blade for automated processes***

Tested machine protection door with aluminum door blade

Safety limit switches

High reliability even after years of high numbers of cycles

Rapid opening and closing ensures short cycle times

Specification:

- max. 3500x3000 mm
- Galvanized side frames
- Aluminium door blade
- *Reinforced lamellas for laser protection*
- MCC
- Pre-running safety edge / *Contact edge*
- Integrated cable chain
- „Schmersal" safety switch
- *Field-Bus systems*
- *Customized functions*

# RP100

The door for material handling




Conveying systems, e.g. conveyor belts

For areas of material handling and driverless transport locks

For automatic lift and storage systems

Partitioning of transport conveyors

Specification:

- max. 3000x3000 mm (max 6 m²)
- Side frames: Galvanized steel
- ACS25 / *ACS40 Frequency converter control*
- *Contact safety edge & photo cell*
- Opening/Closing speed: up to 1,8 m/s 1,1 m/s
- Manual opening by hand crank
- PVC curtain *with vision area*
- *Dry contacts*
- *Extended side frames*

# RR Clean

***Certified door for cleanroom applications***




Cleanroom isolation in accordance with DIN EN ISO 14644-1 Class 5

Smooth surface and design in accordance with GMP Class C

High air-tightness keeps the pressure drop through the closed door at min.

Fast opening and closing ensure low air loss and minimize air exchange

Integrated components

<u>Specification:</u>

- max. 3500x3500 mm
- Stainless steel / *Galvanized*
- MCC / *ACS50*
- Opening/Closing speed: 2,0/1,0 m/s
- Suitable for cleanrooms with pressure differences up to 50 Pa
- Contact safety edge & door-line photocell
- *Pre-running photocell*
- Motor and top roll cover included
- *Traffic lights in side frame*
- Contactless *activator "Magic Switch"*
- *UPS-system*

# Rapid Food

***The door for the food industry***



Designed for passages and for closing off hygienic areas in the food processing industry

Fast opening and closing ensure constant temperature

Integrated cabling ensures a smooth stainless steel surface area

Various features dedicated to hygienic requirements of food industry

Specification:

- max. 4.000x4.000 mm
- MCC / *ACS50*
- Opening/Closing speed up to 2,2/1,0 m/s
- Stainless steel
- Open side frame profiles at the bottom
- Contact edge & door-line photocell
- *Pre-running photocell*
- *Gutter on bottom profile*
- *Counterbalance system (stainless steel weights)*
- Hinged top roll covers
- *Hinged side frames*

# Aktor LCS

The Rapid Roll door for applications in supermarkets




Accelerated logistics by high opening speed

Flour pollers and break-away-system minimize service costs

High degree of safety by flexible door curtain and flexible bottom profile combined with safety light barrier

Automatic opening in the event of a power cut

Specification:

- max. 2.500 x 3.000 mm
- Wind resistance: Class 0
- Painted motor and top roll cover
- Painted aluminum side columns
- PVC door curtain / Print on curtain
- Frequency converter control
- Opening/Closing speed: 1,5/0,8 m/s
- Break-Away function with automatic reset
- Flexible bottom profile
- Light curtains integrated in side frames
- Balancing weight in side frame
- 300 mm high flour pollers

# Overview control systems

## ACS25

- Contactor control
- Plastic box with foil key (up-stop-down)
- 190 x 300 x 115 mm
- Additional box: 160 x 240 x 120 mm with top hat rail
- 7 segment display with error codes
- Special UPS system
- Simple function (okay with pull switch, push buttons)
- Electrical counter
- Low price
- Limited functions
- Door speed approx. 0,8 m/s



## ACS50

- Reversing contactor control
- Painted steel / Inox box
- 300 x 400 x 210 mm (Steel)
  380 x 380 x 210 mm (Inox)
- No display -> LEDs
- Mechanic counter (6 digits)
- Special UPS system
- Economic control type
- Spacious control box
- Limited functions
- Door speed approx. 1,0 m/s



## MCC Vector Control

- Frequency converter control
- Aluminium box
- 220 x 380 x 100 mm
- Extension boxes in plastic, steel, inox ("Combi boxes")
- Extended MCC
- Graphical clear text display with foil keys
- Various display languages
- Integrated counter in display
- Integrated SPS to customize door functions
- MCC UPS-System
- Integrated design
- High cycle times
- Smooth operation (Low wear)
- Door speed up to 2,3 m/s



# Curtain material

## PVC



- Standard curtain
- Transparent material
- Thickness: 1,4 / 1,8 mm
- 1,4 mm: RR300, RR300+, RR355
- 1,8 mm: RR392, RR450, RR600

## RollTex Plus/Original

- Woven stiff material
- Thickness: 1,85 / 2,35 mm
- Temperature: -35 to +70/+100° C
- Coating: PVC / Acrylic
- Colors: orange, grey, blue
- Interior/Exterior doors
- PVC windows: 700x500 mm



## Nomatex

- Woven material
- Thickness: 2,05 mm
- Temperature: -28 to +70° C
- Coating: PU / PVC
- Colors: orange, blue
- Vision area
- Interior/Exterior doors



## Special

- RollTex material painted in any RAL color
- Logo prints
- Nomatex flame-retardant
- High air permeability curtain



# Anti crash systems

**Manual crash function**: RR300, RR300+, RR392, RR Food
- in the event of a collision bottom profile breaks-away
- sensor recognizes crash and stops the door
- door can be reset easily by hand

**Flexible Edge** (Manual crash function): RR300, RR300+
- no damages to door, passing material and persons
- no breakdown after crash
- door can be reset easily by hand
- Wind class 0

**Automatic crash function**: RR355, RR450/600, RR600Base/Ultra
- in the event of a collision the bottom profile breaks away
- sensor recognizes crash and stops the door
- after closing the door is ready to use again
- in combination with pre-running photocell

- **No anti-crash** available: RP100, RP300, RP2000, RR Clean, RR3000

# Customized solutions – Always one step ahead

- Oversized doors (e.g. RP300 „Divi“, DW: 8000 mm)
- Customer standards (VW, Skoda, Audi, Daimler, BMW, …)
- Wide range of signals and activators (sounders, beacons, safety switches)
- Certified explosion proof high speed door
- Various control functions (Interlock, interface to machine, bus-systems)
- Curtains with logo print
- High-speed door „Up-side-down“
- …







# Activators

Radio transmitters











Radar motion detector



Push buttons




Key switch




Loop detectors



Infrared detector

Light curtain





Laser scanner



Combi radar



Pull switch




”Magic switch”

**More on request**

# Lights



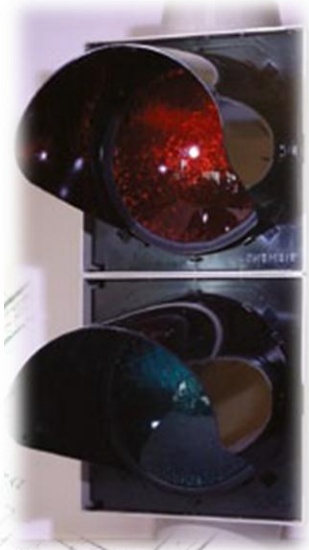

Traffic lights



Special lights





LED strips



Flash lights



**More on request**


# We trust in Albany products…




…and many more

# Albany support lifecycle



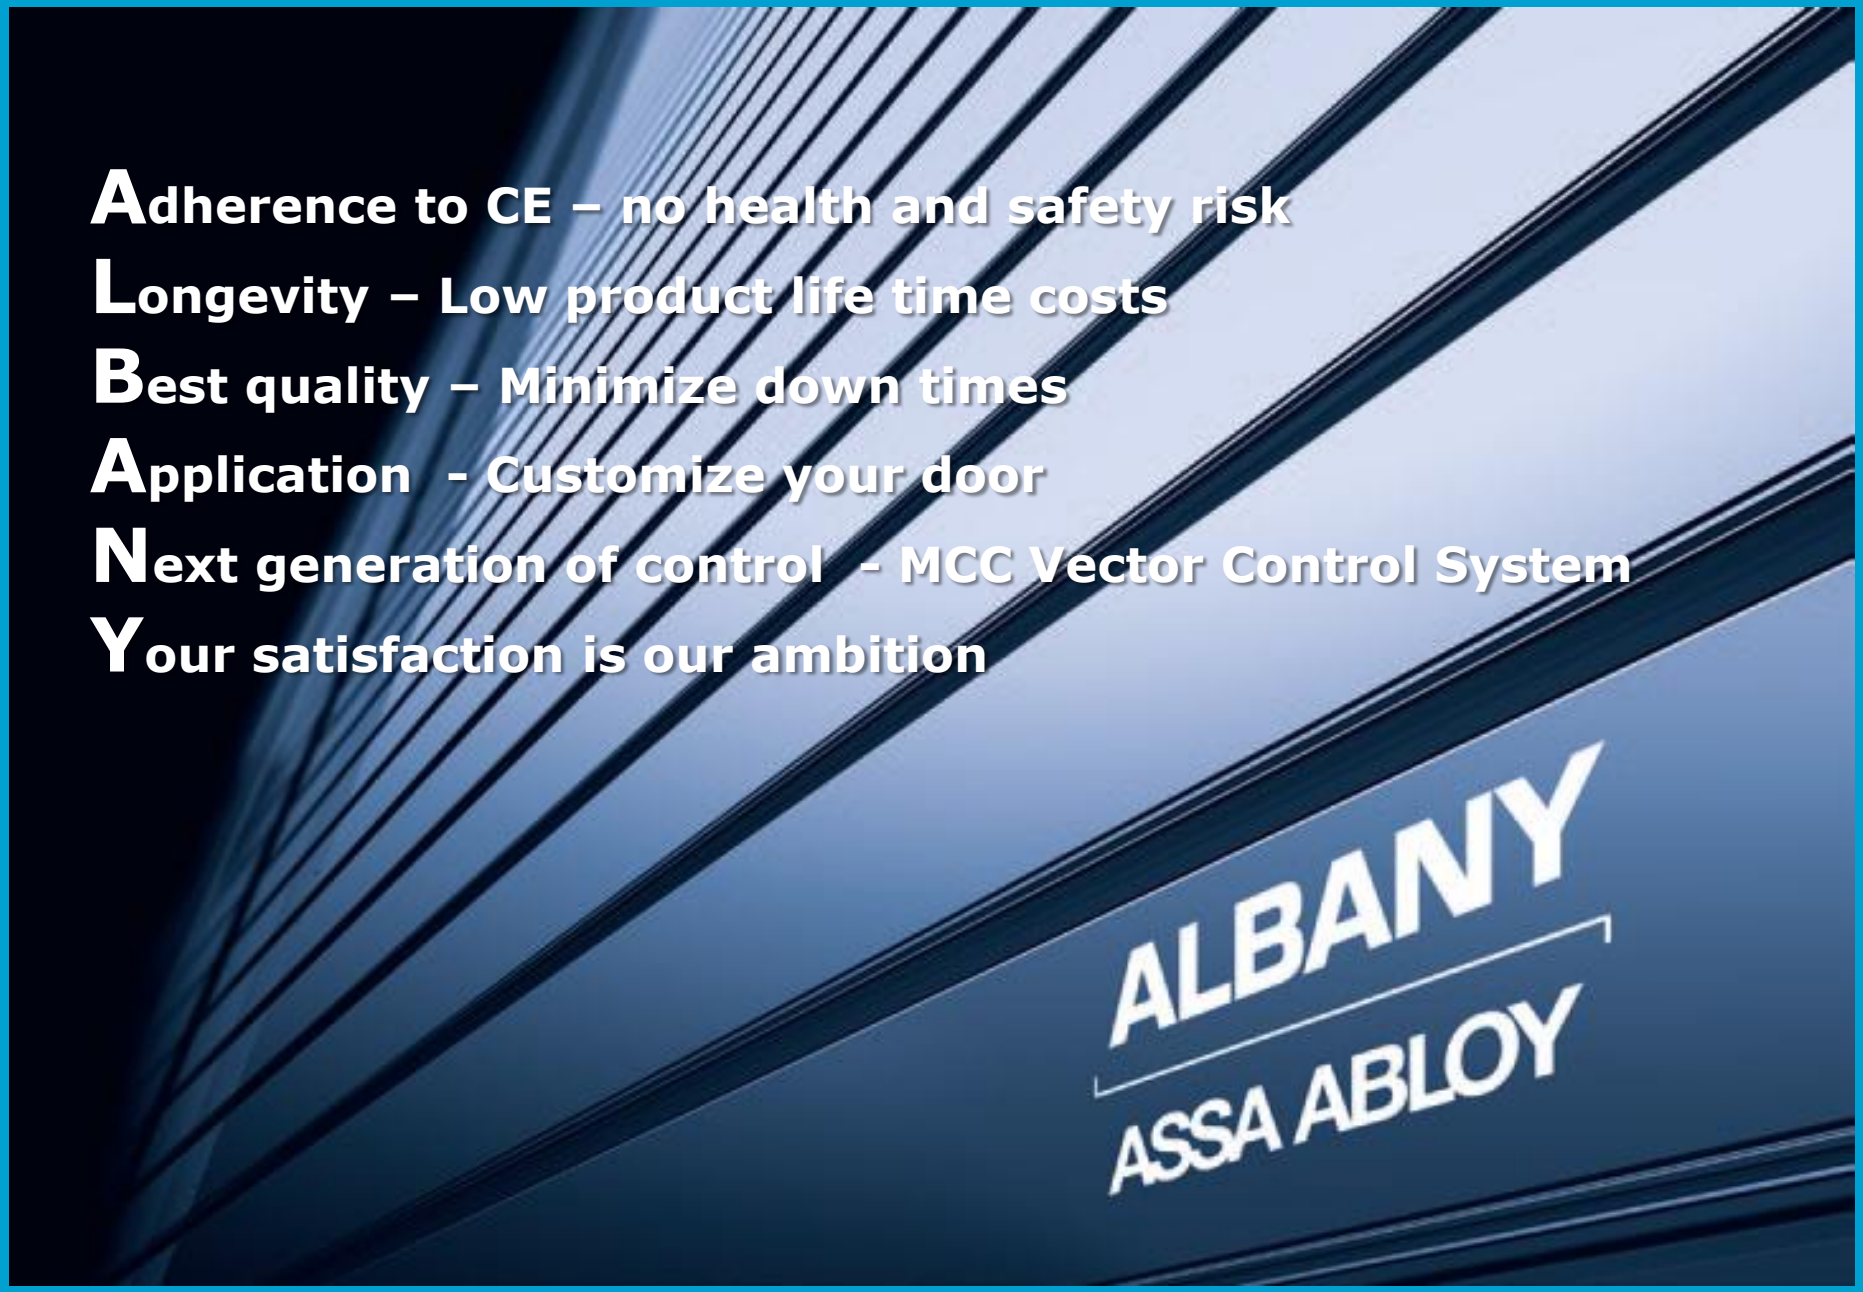


**A**dherence to CE – no health and safety risk

**L**ongevity – Low product life time costs

**B**est quality – Minimize down times

**A**pplication - Customize your door

**N**ext generation of control - MCC Vector Control System

**Y**our satisfaction is our ambition