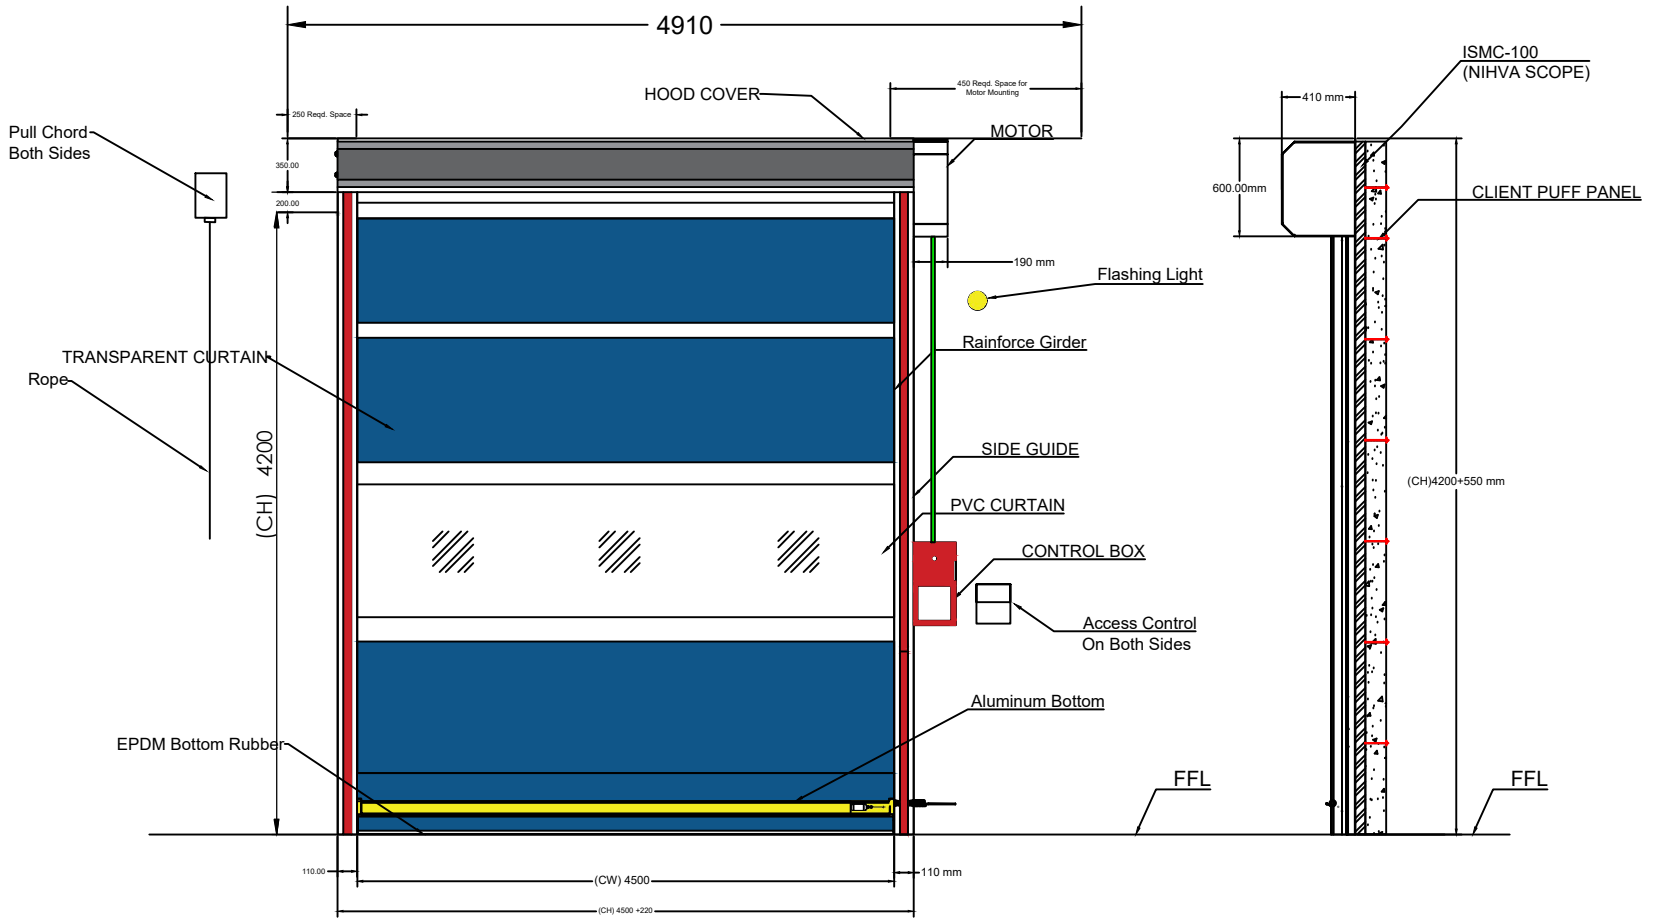


TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	Control Panel	LED Display Servo Controller : - Operating Speed (Adjustable) : 1.4~2.5 min/ Working Temperature : -35 degree to 65 degree - Water Resistant : IP65 Make IDER, manufactured under European Standards
2	Drive	IDER Make ,Manufactured under European Standards,CE Certified
3	Motor Power ,Torque	Power : 1.1 kW Torque : 65 Nm
4	Door Travel Speed	Opening: 2 m/Sec & Closing:0.9m/Sec
5	Safety Device	Safety Photocell Pair & Safety Edges
6	Surface Finish	As Per Client Requirement

NOTE:

(1) All Cables & Ele.Conduits to be provided by RINAC
(2) All Civil Work in Client Scope
(3) Required M.S.Structure & Fittings at Nihva Scope

Sr	Clear Width (CW)	Clear Height (CH)	QTY
1	4500	4200	3

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	HIGH SPEED DOOR WITH ACCESS CONTROL GA DRAWING		
	NAME	SIGN	DATE
DRAWN	S.J		19.01.2024
CHECK	A.K		19.01.2024
APPRD.	V.T		19.01.2024

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - RINAC
PROJECT - HIGH SPEED DOOR
FORMAT NO - NIHVA-DD-F-03
If any queries contact : projectsupport@nihva.com
DWG. NO. : NIHVA/23-24/00XX
REV- R00
ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: