


HYD CYL - Ø40(Bore)X35(Rod dia.)X100(Stroke length)
(Single acting cylinder)

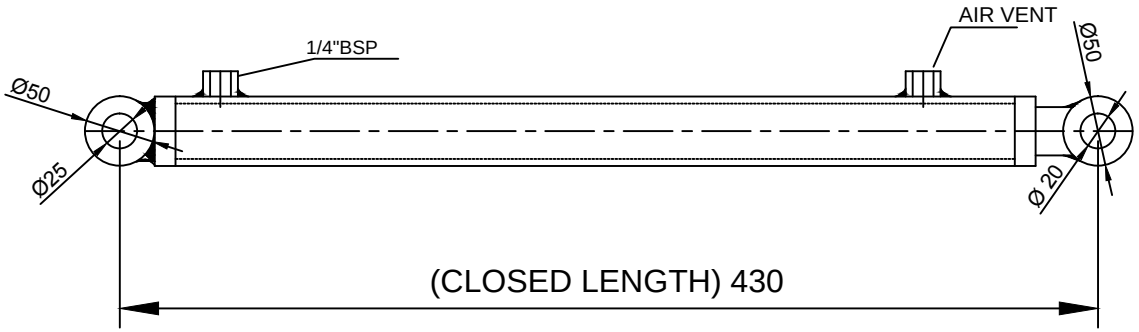



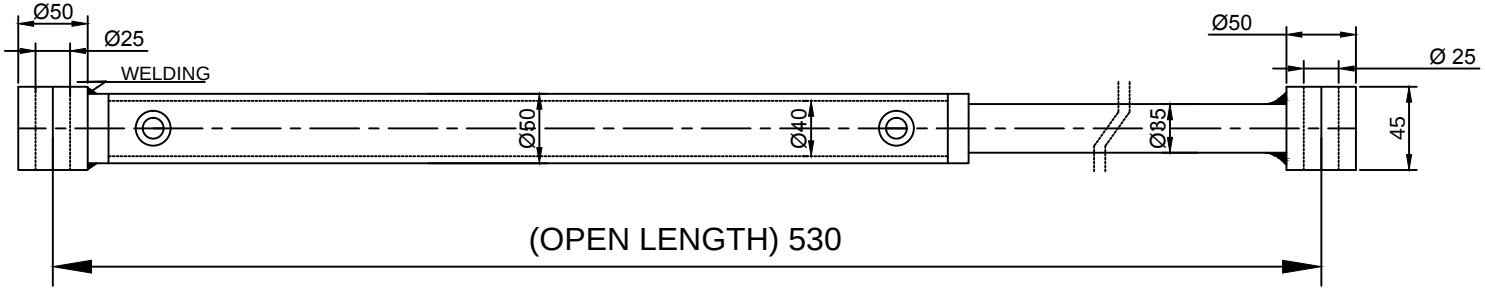

QUANTITY- 1 NOS

SPECIFICATION :-

- BORE :- Ø40mm
- STROKE :- 100 mm
- PISTON ROD :-Ø35mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-1/4" BSP
- WORKING PRESSURE :-160 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:
LIP CYLINDER(Single Acting)

CLIENT'S APPROVAL :

CLIENT -

PROJECT -

SITE LOCATION -

PART. NO. :- 100033

SCALE: NTS	WT:	SHEET:1 OF 1

DRAWN BY: OMKAR	DATE: 25-10-2017
CHECK : SHEKHAR	DATE: 25-10-2017
APPROVED : SHEKHAR	DATE: 25-10-2017

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSION ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT BE SOLD OR COPY TO ANY OTHER CONCERN.