

TUCSON

TCV LINE MOUNTED THROTTLE CHECK VALVE

FLUID POWER SYMBOL

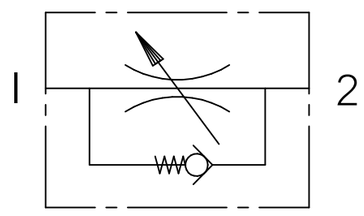

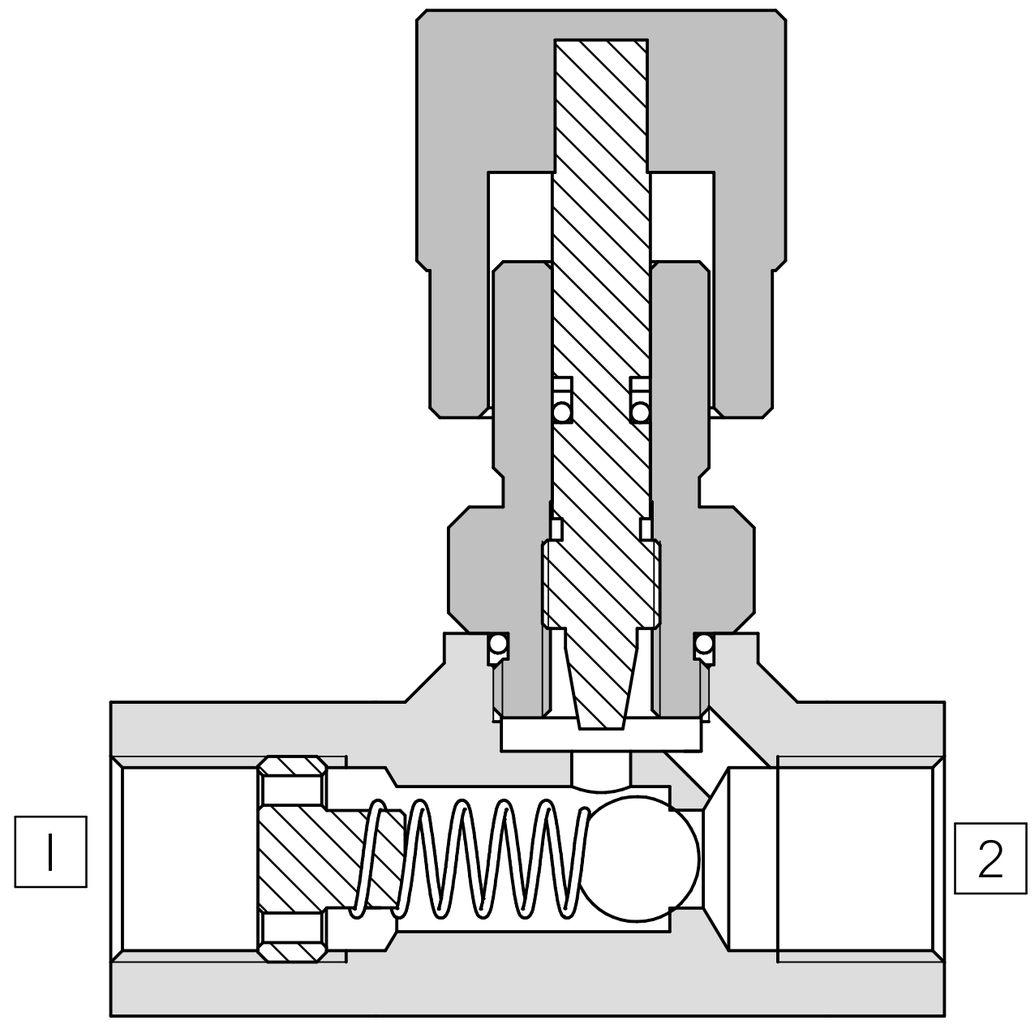

SECTION A-A

6

Application

Throttle Check valves are used where volume flows have to be infinitely controlled in one direction while allowing for free flow in the reverse direction. A typical use is the speed control of cylinder or other actuators. The free flow check allows for meter-in or meter-out actuator control.

Operation

A fine tread on the adjustable throttle reveals an annular gap or triangular notch. The adjusted throttle cross-section produces a pressure drop which determines the volume flow. The volume flow is zero when the throttle is screwed in (the metal sealing edge seals completely). The in-built check valve allows free flow in the reverse direction.


Features

Hardened and ground spindles with machined and hardened seats give excellent flow characteristics with zero leakage. The sealed adjuster provides leak-free adjustment. The locking screw allows the flow to be set and locked.

Specifications

Figures based on: Oil Temp = 40°C Viscosity = 40 cSt

Rated Flow	See Graph
Max Pressure	See Table
Cartridge Material	Working parts : Hardened, ground steel External surfaces : Zinc plated
Weight	See Table
Material of Construction	Steel
Mounting	Line
Seal Kit Number	See Table
Filtration Level	BS5540/4 Class 18/13 (25µ nominal)
Operating Temp	-20°C to +90°C (Standard Seals)
Leakage (when shut)	Less than 0.3 millilitres/min (5 dpm)
Viscosity Range	5 to 500 cSt

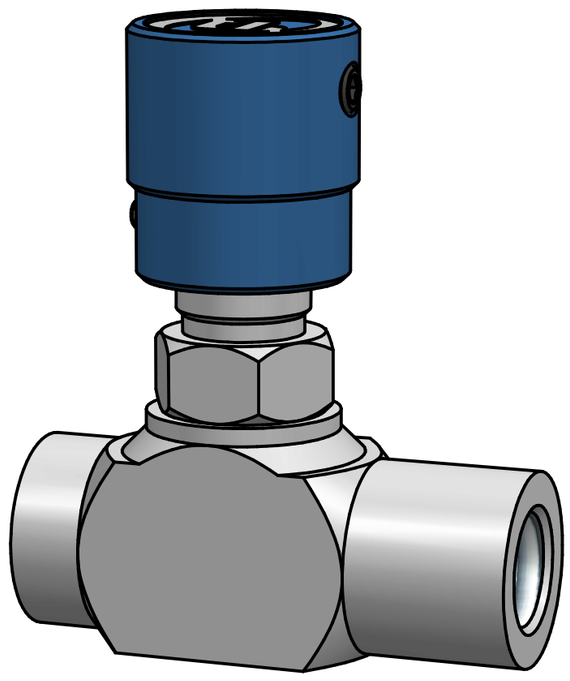

3D ISOMETRIC VIEW


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

CIB 246/5, G.I.D.C. Indl. Estate
Umbergaon, Gujarat
tucson@vsnl.com

COMPLETE VALVE


VARIOUS BSP PORTS


BASIC CODE: TCV ***

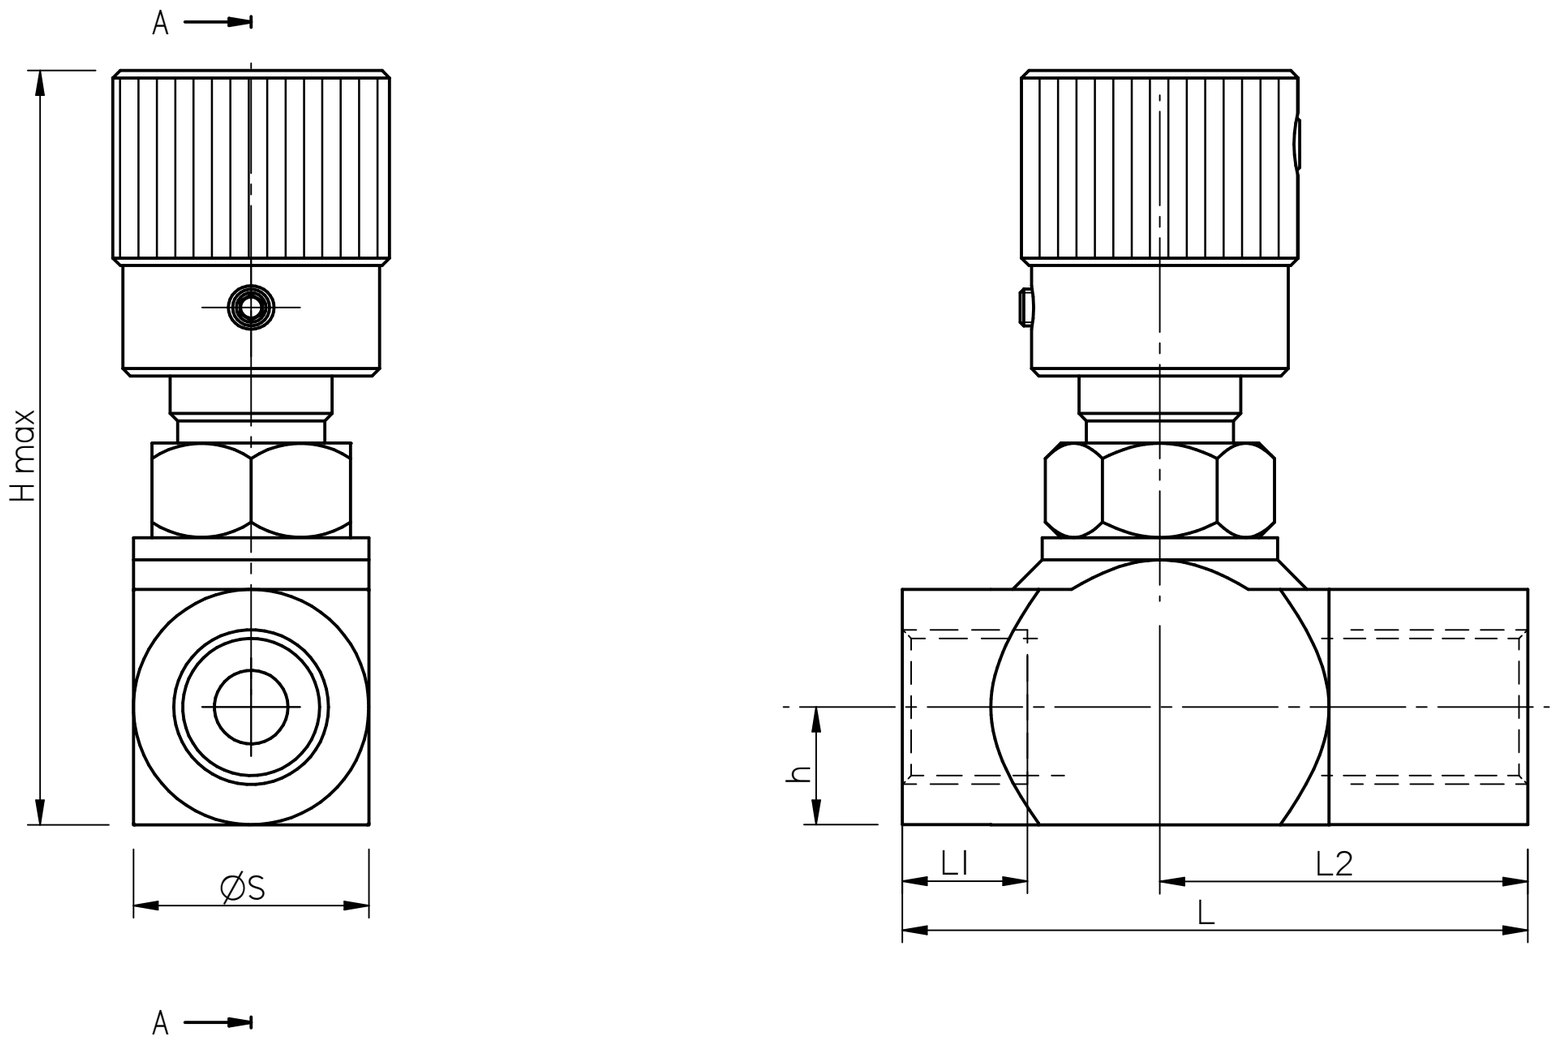

Ordering Code	Pressure	G	S	L	L1	L2	D	H_{max}	h	Seal Kit	Weight	Check Type
TCV 2W	350 bar	1/4" BSP	25	70	12	46	32	92	12	SKTCV2W	0.60 Kg	Poppet
TCV 3W	350 bar	3/8" BSP	25	71	15	45	32	92	12	SKTCV3W	0.60 Kg	Poppet
TCV 4W	350 bar	1/2" BSP	32	85	16	50	38	110	16	SKTCV4W	1.10 Kg	Ball
TCV 6W	300 bar	3/4" BSP	41	95	19	58	38	120	21	SKTCV6W	1.60 Kg	Poppet
TCV 8W	300 bar	1" BSP	50	120	21	75	45	132	25	SKTCV8W	2.80 Kg	Poppet

PRESSURE CHARACTERISTICS

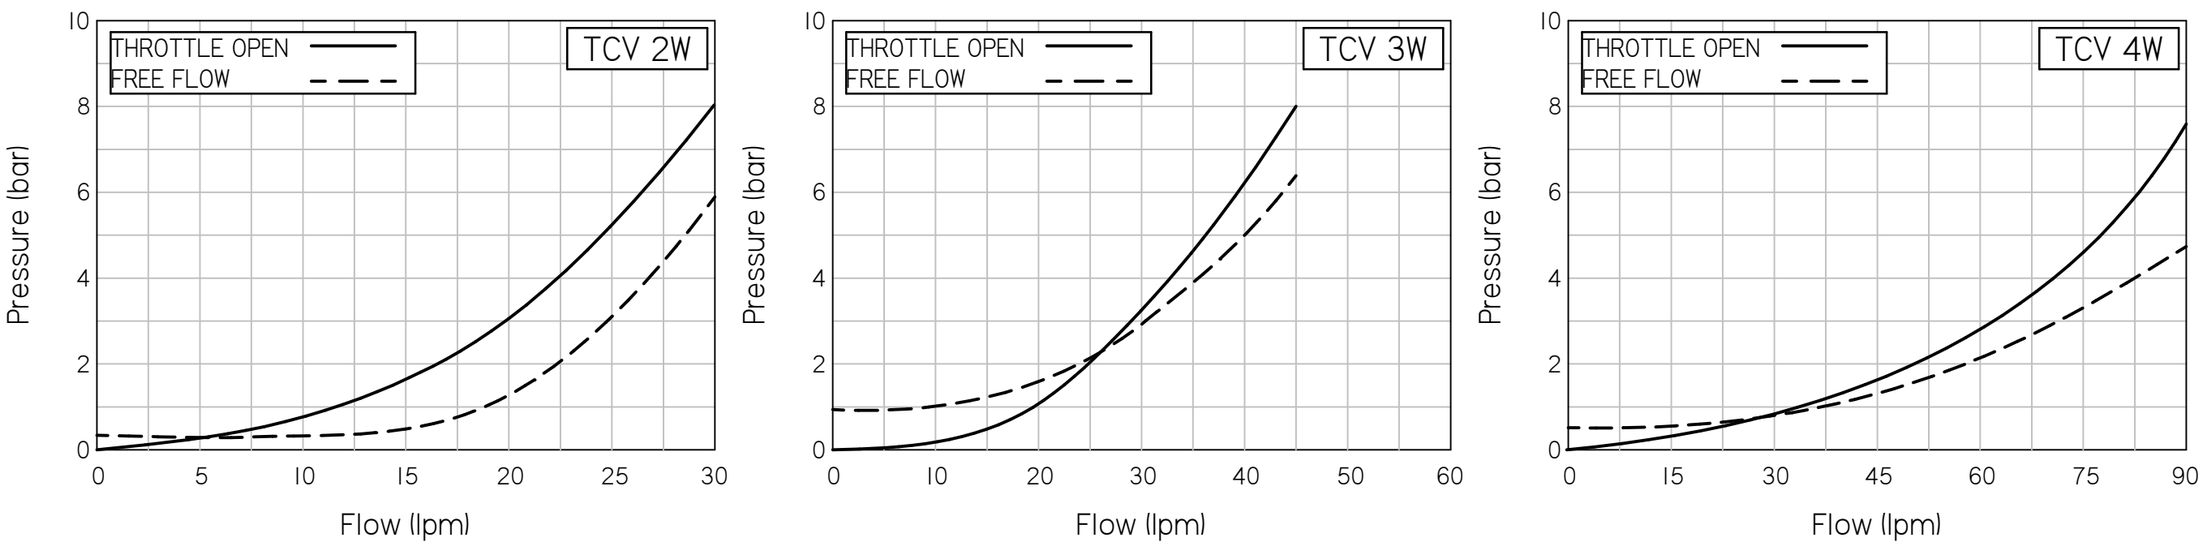

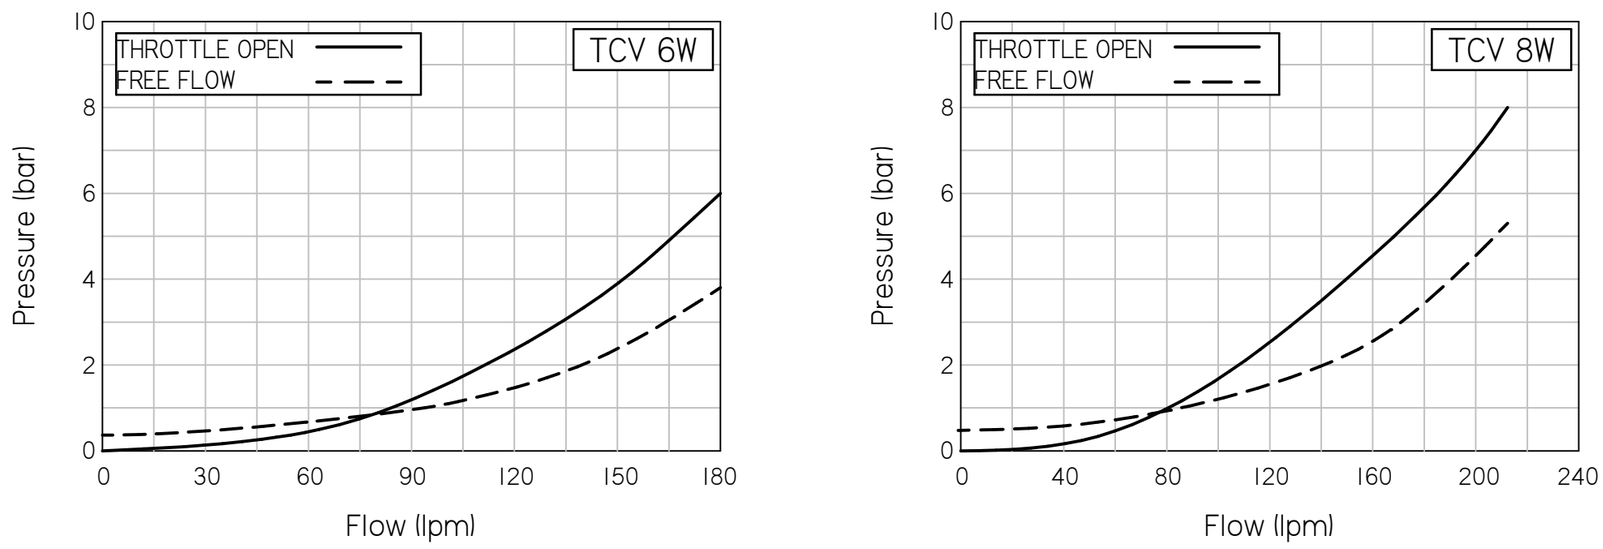

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.