


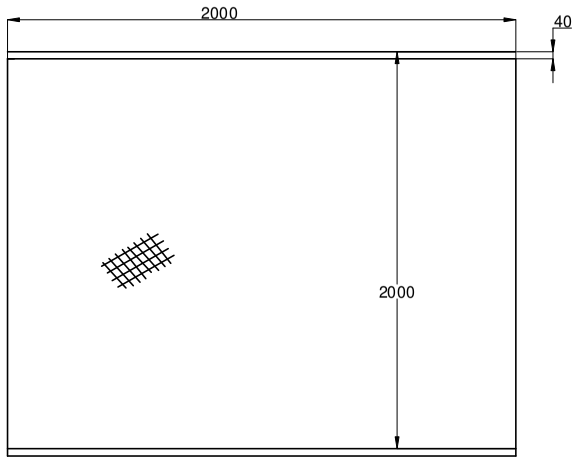


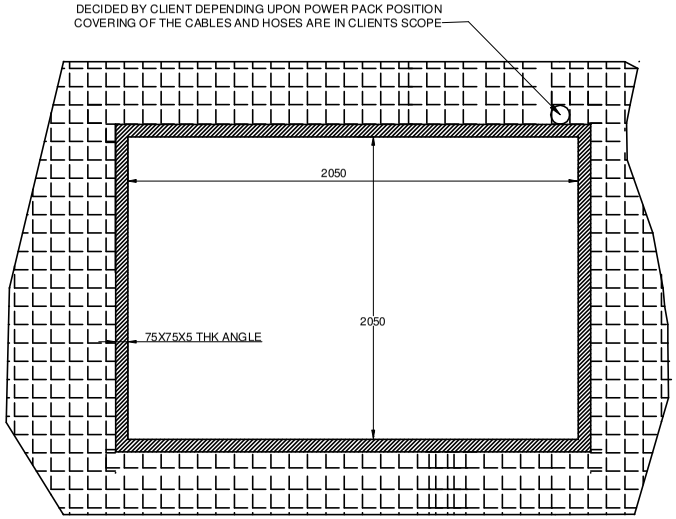

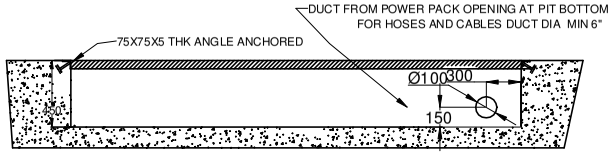

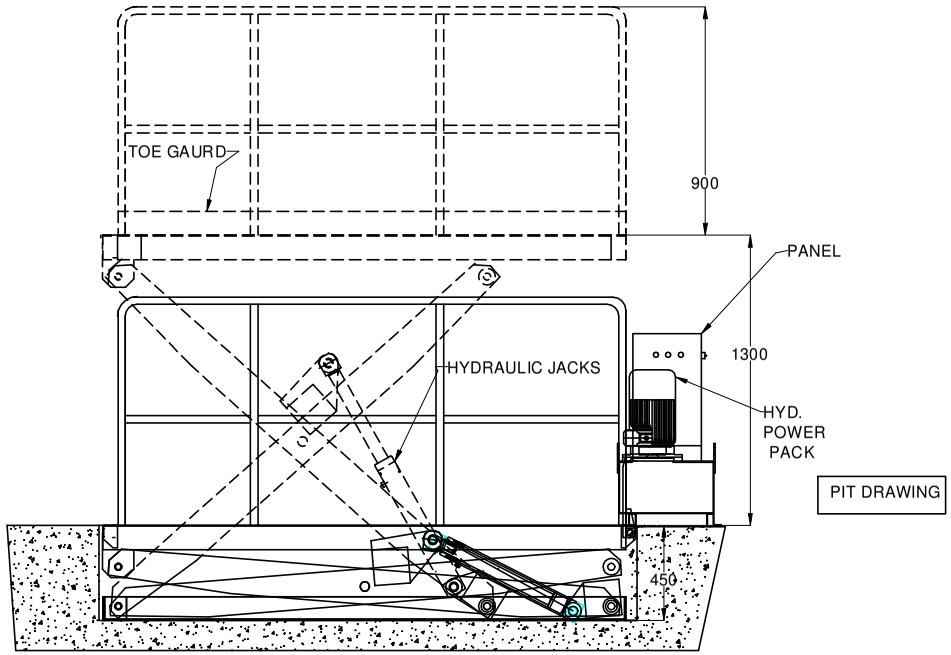

NOTE :
1. PIT FOR SCISSOR LIFT HAS TO BE DIAGONALLY WITHIN 3-5 MM
2. BASE OF THE PIT HAS TO BE IN WATER LEVEL AND RIGHT ANGLE TO THE VERTICAL SIDE WALLS
3. PROPER ARRANGEMENT FOR ROUTING HOSES AND CABLES HAVE TO BE MADE DEPENDING ON SITE CONDITIONS AND POSITION OF POWER PACK
4. COVERING REQUIRED FOR HOSES, PANEL , AND CABLES RELATED CIVIL WORK IS IN CLIENTS SCOPE ALSO PROPER DRAINAGE SYSTEM SHOULD BE PROVIDED FOR THE PIT.

Specifications

Dimensions	Equipment		Scissors Lift	
	Rated Capacity		W Kgs	2000
	Platform	Length	mm	2000
		Width	mm	2000
	Type			Chequered
		Lip		No
		Lip type		NA
	Lifting Speed		m/min	3 - 4
	Overall	Length	mm	2000
		Width	mm	2000
	Heights	Closed	mm	450
		Lift	mm	1300
Drive	Lift Motor 3 Ph AC		H.P.	3
	Pendent On Platform			1 Nos
	Panel - Std Make,			
	Lift Cutoff switch			
	Operation :- Push Buttons			

EQUIPMENT - SCISSORS TABLE