fsIndustries

ENGINEERED STEEL PRODUCTS

Priced Full Line Products Catalog

20 Technology Way • West Greenwich, RI 02817

Toll free:(800) 421-0314 • In RI:(401) 272-4570 • Fax:(401) 421-5679

Home Order Search Quote Contact Us About Us My Account Shopping Cart

Categories Select a Product Category GO

Friday, January 12, 2018

Back to Product Category

MAXXREACH TELESCOPIC CONVEYOR



The MAXXREACH Telescopic conveyor system with its all-steel construction, is the smart solution for high volume shipping and receiving applications. With the MAXXREACH system, you can automate your loading and unloading areas and convey a variety of products from large to small cartons, from loose bags to tires. Moving large volumes of freight in and out of trailers is made faster, easier and most importantly safer, with the operator controls conveniently located at the end of the unit.

24" wide. Other lengths and widths priced upon request.



MR3-25/80 featured with raised belt transfer.

All of our cost effective telescopic conveyors feature a VFD controlled ***belt drive system*** providing smooth transitions from belt starts and stops at speeds up to 250fpm. Each telescopic also includes a VFD controlled ***extension drive*** providing smooth operation when extending and retracting the conveyor.

The belt start/stop, extend and retract controls are conveniently located at the front of the conveyor as well as the safety extension stop bar to help operators work more efficiently and safely.

CONVEYOR OPTIONS



Telescopic Side Rails



Traversing System



Operator Platform



Raised Belt Transfer

1. Hydraulic Tilt - Provide a means of elevating the Maxxreach to a height within the trailer to support lowering or raising product to avoid personal injury.

2. Man-Rider Platforms - Is a designated area for personal to ride along with the travel of the Maxxreach either from the side on the machine or in front of the machine.

3. Photo Eye Flow Control - Is a devise that interacts between the Maxxreach and other conveyor equipment to insure product flow through alignment or timing.

4. Raised Belt Transfer - Is a devise that attaches to the Maxxreach to transfer product to a subsequent conveyor.

5. Swivel Boom - This devise serves as an ergonomic feature to assist operators when lifting or lowering product on to the Maxxreach.

6. Side guards - These guards keep oversize product from falling from the Maxxreach during transfer of the product.

Price for options are upon request



Optional Raised Belt Transfer




Optional Swivel Boom



Optional Side guards

MR3-25/80 FIXED BASE

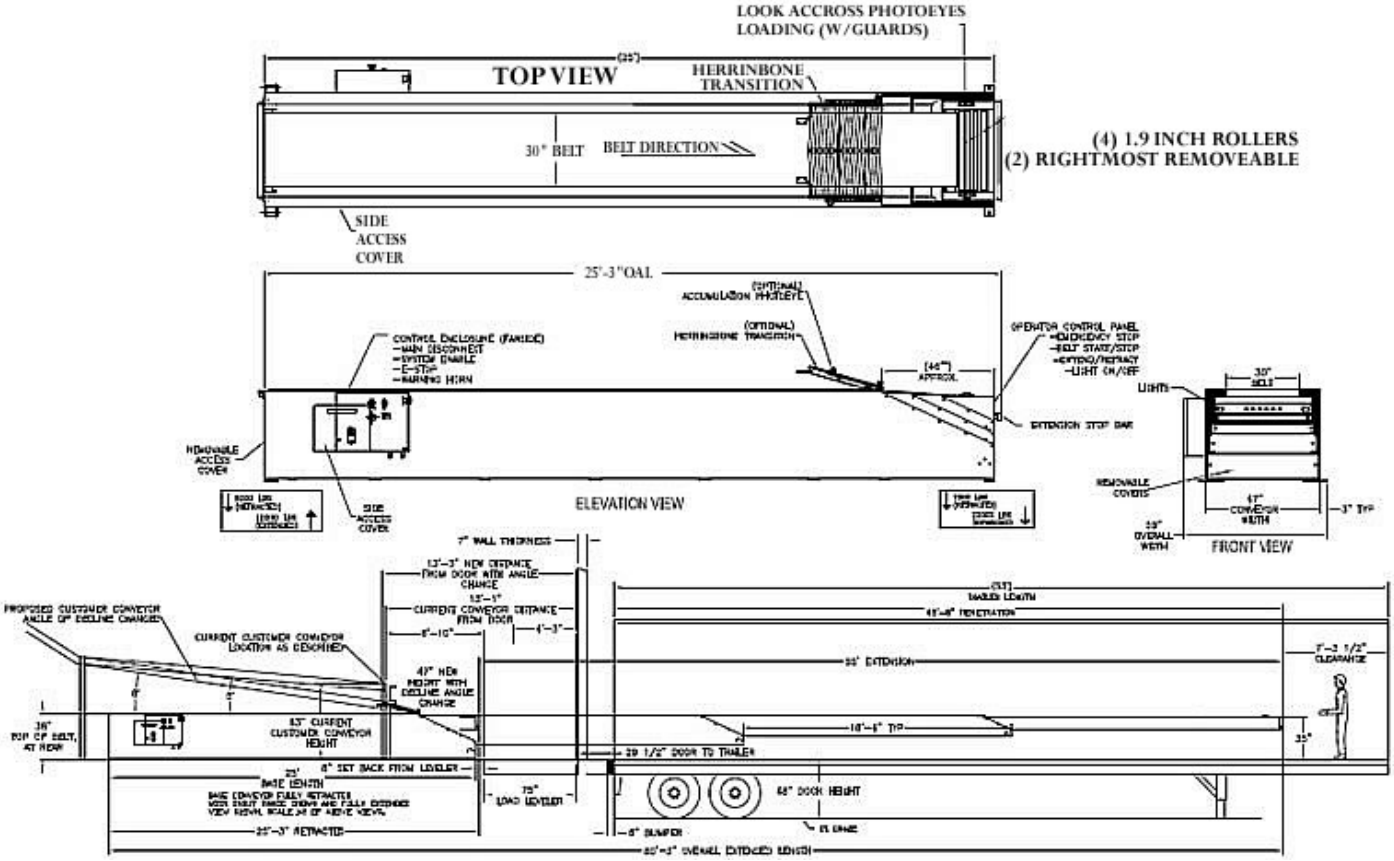

TECHNICAL SPECIFICATIONS FOR MR3-25/80-24

Length Fully Extended - 80’
Length Fully Retracted - 25’
Extension - 38”
Overall Height - 40”
Overall Width - 41”
Belt Width - 24” (optional 30” and 36”)
Belt Type - 2 Ply PVC
Belt Speed - 60 to 120 FPM (adjustable)
Belt Direction - Application Specific
Belt Drive - 3 HP Chain Driven Drum
Telescopic Movement - 1 HP Gear Motor with dual synchronized chains
Telescopic Speed - 45 FPM
Power Supply - 3 Phase 480v 60hz
Control Voltage - 120 Volt
Load Capacity - 50 lbs/ft
Color - Maxx Grey (other colors are optional)


TECHNICAL SPECIFICATIONS FOR MR4-18/64-24

Length Fully Extended - 64’
Length Fully Retracted - 18’
Extension - 46’
Conveyor Height - 39”
Conveyor Width - 42”
Belt Width - 24”
Belt Type - 2 Ply PVC
Belt Speed - 60 to 120 FPM (adjustable)
Belt Direction - Application Specific
Belt Drive - 3 HP Drum motor
Telescopic Movement - 1 HP Gear Motor with dual synchronized chains
Telescopic Speed - 45 FPM
Power Supply - 3 Phase 480v 60hz
Control Voltage - 24 VDC
Load Capacity - 50 lbs/ft
Color - Maxx Grey (other colors are optional)

Approximate Weight - 10,000 lbs
Control Panels - Master control panel on the left
PRICE: $64,613.00

Approximate Weight - 8,000 lbs
Control Panels - Master control panel on the left
PRICE: $80,180.00

MR4-18/64 FIXED BASE

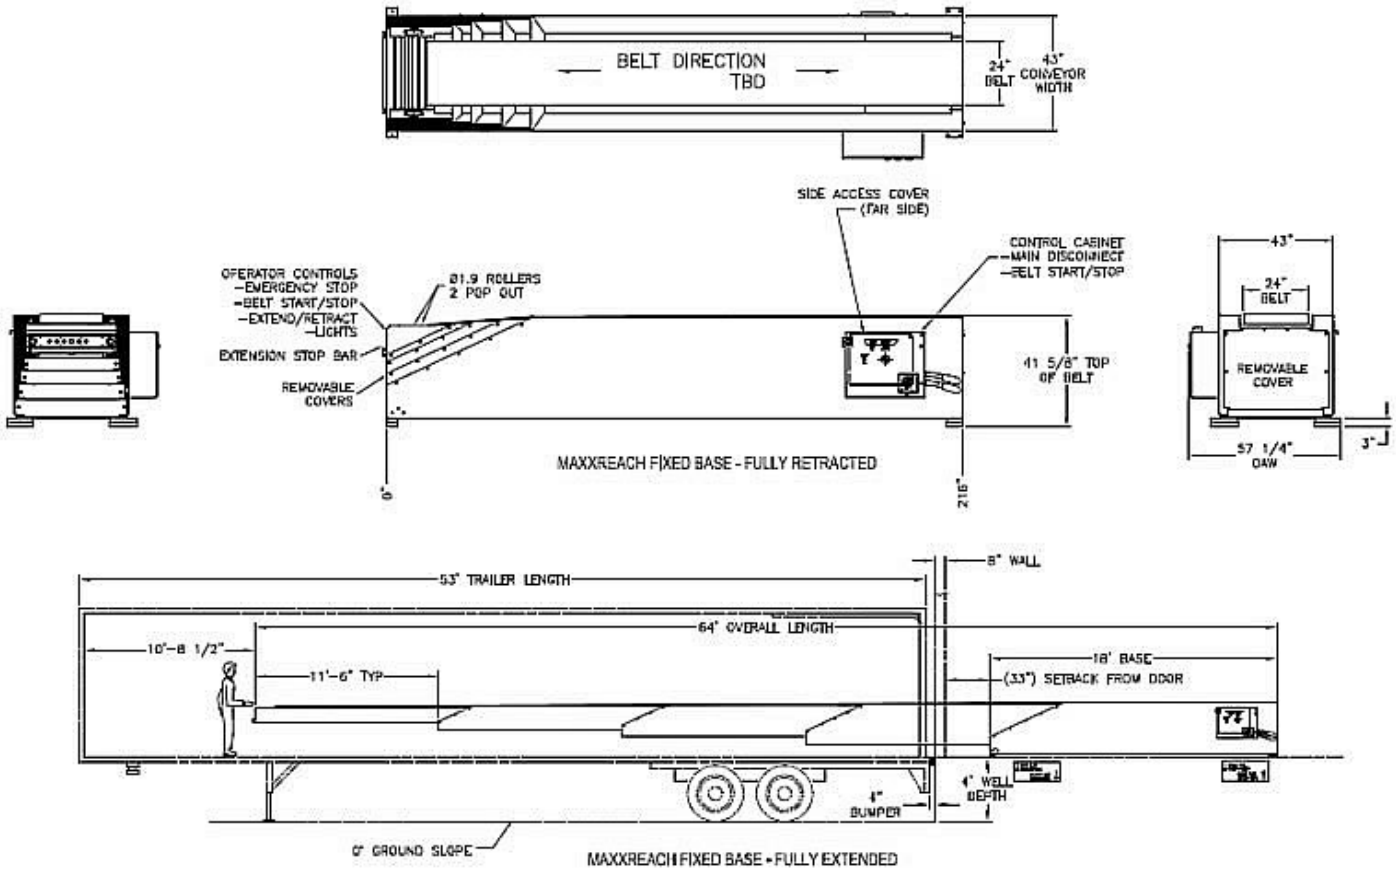


TECHNICAL SPECIFICATIONS FOR MR3-28/88-24

Length Fully Extended - 88'
Length Fully Retracted - 28'
Extension - 60'
Overall Height - 38"
Overall Width - 47"
Belt Width - 24" (optional 30" and 36")
Belt Type - 2 Ply PVC
Belt Speed - 60 to 120 FPM (adjustable)
Belt Direction - Application Specific
Belt Drive - 3 HP Chain Driven Drum motor
Telescopic Movement - 1 HP Gear Motor with dual synchronized chains

Telescopic Speed - 45 FPM
Power Supply - 3 Phase 480v 60hz
Control Voltage - 120 Volt
Load Capacity - 50 lbs/ft
Color - Maxx Grey (other colors are optional)
Approximate Weight - 12,300 lbs
Control Panels - Master control panel on the left
PRICE: $68,684.00

With a variety of lengths, widths and options, such as TRAVERSE, HYDRAULIC TILT, INDEX ACCUMULATION, RAISED BELT TRANSFERS, TELESCOPIC SIDE RAILS and many more, you can see how the MAXXREACH conveyor will help to achieve your material handling goals.

MR3-28/88-24

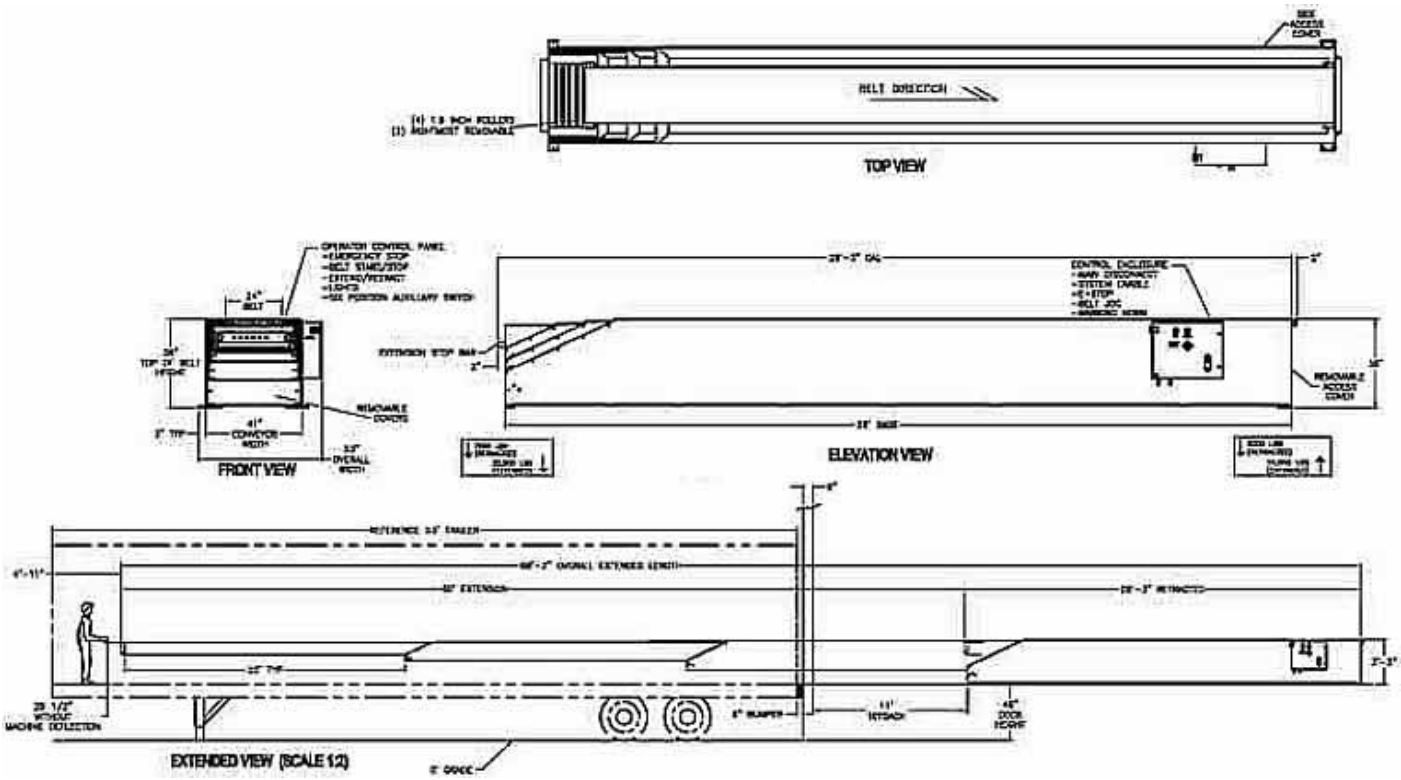

MAXXREACH STANDARD FEATURES AND OPTIONS

LENGTH
Overall extended lengths available from 13-88 feet.
Retracted base length range from 8-28 feet.

BELT DRIVE
VFD controlled drum motor and crown pulleys.
Load / unload and Bi-directional capability.

SPEED CONTROL
Belt speed is standard from 60fpm – 120fpm, but with our VFD controls others speeds are available.

CONTROL PANELS
Master control panel standard on left side of base section. Panels are UL, CUL and CSA listed. Operator controls conveniently located at front of unit for ease of operation.

TELESCOPIC MOVEMENT
VFD controlled gear motor with dual synchronized chains. Extend/ retract speed is standard at 45fpm, but with our VFD controls others speeds are available.

PAINT
Standard color is FMH Grey. Other colors available per customer request. Paint is a corrosion resistant painted finish.

BELT TYPE AND WIDTHS
Belting is 2-PLY PVC and standard widths are 18”, 24”, 30” and 36”.

POWER
3-Phase 460v 60Hz. Other voltages available upon request.

WARRANTY
One year factory warranty.

LOAD RATING
We offer a range of ratings of up to 50 lbs per liner foot!

EXAMPLE SPECIFICATIONS

Model Number	Base-Retracted Length	Cantilevered Extension	Overall Length
MR-1 10/17	10	7	17
MR-1 15/27	15	12	27
MR-2 14/34	14	20	34
MR-2 20/48	20	28	43
MR-3 18/54	18	36	54
MR-3 20/60	20	40	60
MR-3 24/76	24	52	76
MR-3 25/80	25	55	80
MR-3 28/88	28	60	88
MR-4 16/58	16	42	58
MR-4 18/64	18	46	64
MR-4 21/72	21	51	72
MR-4 22/74	22	52	74
MR-4 25/80	25	55	80
MR-5 16/62	16	46	62
MR-5 22/76	22	54	76

Other lengths available.

CONVEYOR OPTIONS

There are a variety of options for you to choose from. Please contact us today to arrange a free application analysis to see how these and other options we offer can help to improve your MAXXREACH conveyor system.

- Hydraulic Tilt
- Man-Rider Platforms
- Powered Traverse
- Photo Eye Safety Systems
- Photo Eye Flow Control
- Auto-Load Function
- Raised Belt Transfers (RBT)
- Swivel Boom
- Fifth Articulation Boom (FAB)
- Incline Takeaway (IT)
- I.T. With Nose Over
- Telescopic Side Rails
- Telescopic Ventilation
- High Level Frames
- Pole Mounted Stack Lights

- Traveling RBT
- Herringbone Transitions
- Safety Horn
- Index Accumulation

Maxxreach Telescopic Conveyor, Belt Driven Conveyor, Power Conveyor, NestaFlex, Powered Extension, Extendable Conveyor, Powered Telescopic Belt Conveyor, Belt Conveyors, and Expandable Conveyors from your source for material handling equipment.

Back to Product Category

