
ivy

SUPO®

HI-TECH CASTER WHEELS

KEEPS
THE WORLD
MOVING

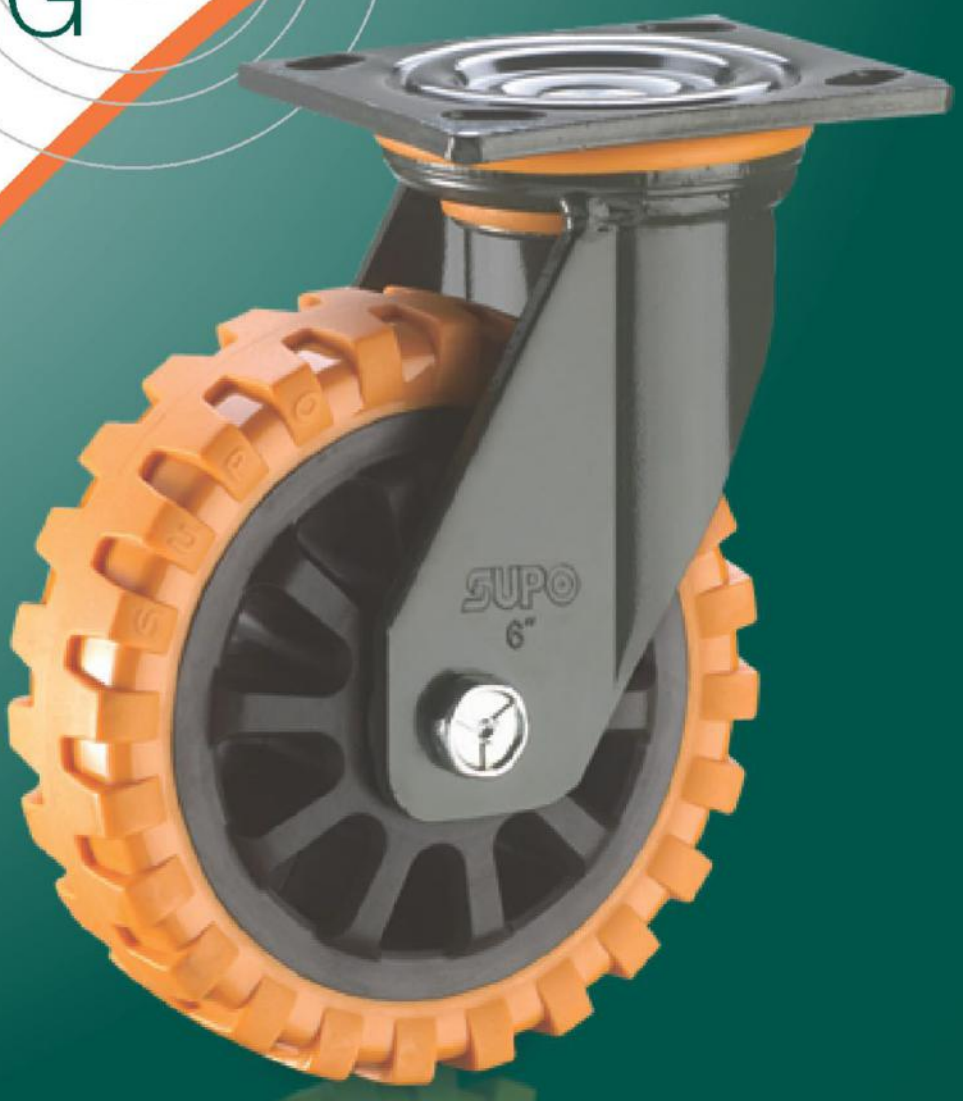

www.jyotiarch.in



TESTING CENTER

Optical and heat detector

1. Bracket temperature test by infrared ray
2. Wheel temperature test by infrared ray
3. EN durability Test


   1.2 times to its ordinary load, keep the caster running for 3 min at speed of 2-4km/h, continuously run 15000 circles. It is passed if the tread without any serious partly flaking and damage and the whole wheel without any extra ordinary damage and permanent deformation influencing using and the bearing runs normally, without any loosening or jamming.

4. Monitor record the whole process
5. Speed monitoring
6. Touch screen control system
7. Weight loading control by electric
8. Console

Based on European standard



● Application Test

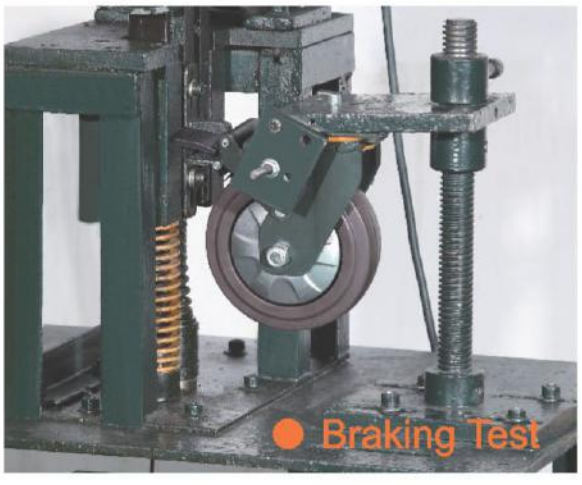

● Braking Test



● Multifunctional Test Machine



● Hardness Test



● High-Low Temperature Test

ABBREVIATIONS DETAILS

Part Numbering System

IV – J | 03 – 01 | D – 75 – 35 | 1

- J → Fork Assembly
- 03 → Series
- 01 → Fastening
- D → Brake Assy.
- 75 → Wheel Dia
- 35 → Wheel Material
- 1 → Bearing Model

Fork Assembly



Z = (Zinc Plated)



J = (Dark green painted)



JP = (Dark green plastic)

Series No.

- 01 = Light duty
- 03 = Medium/Light duty
- 05 = Medium/Heavy duty
- 07 = Heavy duty
- 08 = Light duty
- 10 = Ultra heavy duty
- 11 = Super heavy duty
- 12 = Heavy duty
- 17 = Super heavy duty
- 19 = Medium/Light duty
- 23 = Medium/Light duty

Fastening



04 - Fix



01 - Swivel



01D - Swivel + Brake



02 - Thread Stem



02D - Thread + Brake



02E - Single Brake (Plastic)

Wheel Material

- 11 = Polyolefin (flat tread)
- 12 = Polyolefin (round tread)
- 20 = Polyurethane (flat tread)
- 25 = Hi-tech Polyurethane (skidproof)
- 28 = C.I/Urethane wheel (round tread)
- 30 = C.I/Urethane wheel (flat tread)
- 35 = Super strong PU
- 36 = Ultra strong PU
- 41 = TPR wheel (flat tread)
- 42 = TPR wheel (round tread)
- 54 = Foam elastic rubber
- 52 = Pneumatic elastic rubber
- 61 = Nylon (flat tread)
- 62 = Nylon (round tread)
- 66 = Nylon

Bearing Model



1 = central precision ball bearing



2 = double ball bearing



3 = derlin bearing




4 = plain bore (bushing)



Code : 03-351



Wheel construction

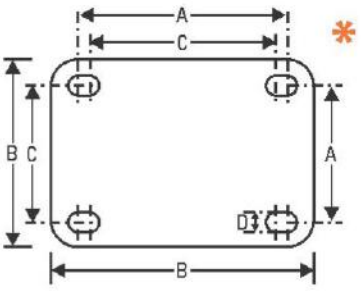



IV-J03-04-100-351



IV-J03-01-75-351



IV-J03-01D-125-351



IV-J03-02-100-351



IV-J03-02D-50-351

Wheel dia (mm)	Tread width (mm)	Load capacity (kg) Per Pc	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	*	Bearing	NO. Model
40 (1 3/5)	22	32	Polyurethane (PU)	61	40	72	(A) 48x30 (B) 60x43 (C) 42x30 (D) 6.5	Single Ball Bearing	IV-J03-04-40-351 IV-J03-01-40-351 IV-J03-01D-40-351 IV-03-40-/22-351-WH
50 (2")	25	40	Polyurethane (PU)	74	48	80	(A) 55x35 (B) 70x51 (C) 49x35 (D) 8.5 **Thread size (mm)** **M10x25**	Single Ball Bearing	IV-J03-04-50-351 IV-J03-01-50-351 IV-J03-01D-50-351 IV-J03-02-50-351 IV-J03-02D-50-351 IV-03-50/26-351-WH
63 (2½)	32	72	Polyurethane (PU)	95	67.5	112	(A) 78x45 (B) 95x66 (C) 71x45 (D) 8.5 **Thread size (mm)** **M12x25**	Single Ball Bearing	IV-J03-04-63-351 IV-J03-01-63-351 IV-J03-01D-63-351 IV-J03-02-63-351 IV-J03-02D-63-351 IV-03-63/32-351-WH
75 (3")	32	100	Polyurethane (PU)	106	74.5	117	(A) 78x45 (B) 95x66 (C) 71x45 (D) 8.5 **Thread size (mm)** **M12x25**	Single Ball Bearing	IV-J03-04-75-351 IV-J03-01-75-351 IV-J03-01D-75-351 IV-J03-02-75-351 IV-J03-02D-75-351 IV-03-75/32-351-WH
100 (4")	32	130	Polyurethane (PU)	130	88	121	(A) 78x45 (B) 95x66 (C) 71x45 (D) 8.5 **Thread size (mm)** **M12x25**	Single Ball Bearing	IV-J03-04-100-351 IV-J03-01-100-351 IV-J03-01D-100-351 IV-J03-02-100-351 IV-J03-02D-100-351 IV-03-100/32-351-WH
125 (5")	32	142	Polyurethane (PU)	155	101.5	126	(A) 78x45 (B) 95x66 (C) 71x45 (D) 8.5 **Thread size (mm)** **M12x25** **Stem Size** 22 ϕx45	Single Ball Bearing	IV-J03-04-125-351 IV-J03-01-125-351 IV-J03-01D-125-351 IV-J03-02-125-351 IV-J03-02D-125-351 IV-J03-05-125-351 IV-J03-05D-125-351 IV-03-125/32-351-WH




IV-J03-04-75-361



IV-J03-01-100-361



IV-J03-01D-125-361

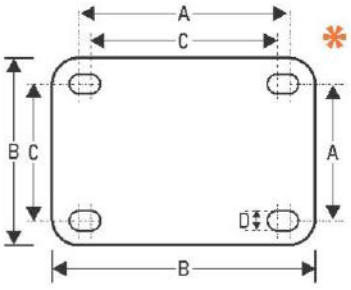

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Bearing	*	NO. Model
40 (1 3/5)	22	32	Hi Tech Polyurethane (PU)	61	40	72	Single Ball Bearing	(A) 48x30 (B) 60x45 (C) 42x30 (D) 6.5	IV-J03-04-40-361 IV-J03-01-40-361 IV-J03-01D-40-361 IV-03-40/22-361-WH
50 (2")	25	40	Polyurethane (PU)	74	48	80	Single Ball Bearing	(A) 55x35 (B) 70x51 (C) 49x35 (D) 8.5	IV-J03-04-50-361 IV-J03-01-50-361 IV-J03-01D-50-361 IV-03-50/26-361-WH
63 (2 1/2)	32	72	Polyurethane (PU)	95	67.5	112	Single Ball Bearing	(A) 78x45 (B) 95x66 (C) 71x45 (D) 8.5	IV-J03-04-63-361 IV-J03-01-63-361 IV-J03-01D-63-361 IV-03-63/32-361-WH
75 (3")	32	100	High-Tech Polyurethane (PU)	106	74.5	117	Single Ball Bearing	(A) 78x45 (B) 95x66 (C) 71x45 (D) 8.5	IV-J03-04-75-361 IV-J03-01-75-361 IV-J03-01D-75-361 IV-03-75/32-361-WH
100 (4")	32	130	High-Tech Polyurethane (PU)	130	88	121	Single Ball Bearing	(A) 78x45 (B) 95x66 (C) 71x45 (D) 8.5	IV-J03-04-100-361 IV-J03-01-100-361 IV-J03-01D-100-361 IV-03-100/32-361-WH
125 (5")	32	142	High-Tech Polyurethane (PU)	155	101.5	126	Single Ball Bearing	(A) 78x45 (B) 95x66 (C) 71x45 (D) 8.5	IV-J03-04-125-361 IV-J03-01-125-361 IV-J03-01D-125-361 IV-03-125/32-361-WH


PRODUCT	Wheel material	Wheel dia(mm)	Tread width (mm)	Load Capacity (kg.) Per Pc	Load Height (mm)	Bearing	Plate Size (mm)	NO. Model
	Thermoplastic Rubber (TPR)	25(1")	12	10	37	Single Ball Bearing	(A) 30x24 (B) 39x33 (D) 4.2	IV-C08-04-25-411 IV-C08-01-25-411 IV-C08-01E-25-411
	Thermoplastic Rubber (TPR)	32(1 1/4")	12	15	44	Single Ball Bearing	(A) 29X21 (B) 38X30 (D) 4.2	IV-C08-04-32-421 IV-C08-01-32-421 IV-C08-01E-32-421

Polypropylene Wheel With Double Ball Bearing






IV-J05-04-100-112 IV-J05-01-100-112 IV-J05-01D-100-112 IV-J05-02-75-112



Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg.) Per Pc	Wheel Material	Loading Hight (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	*	NO. Model
75 (3")	38	167	Polypropylene (PP)	111	75	110	Double Ball Bearing	(A) 80x60 (B) 101x82 (C) 73x53 (D) 11 Thread Size (MM) M16x35	IV-J05-04-75-112 IV-J05-01-75-112 IV-J05-01D-75-112 IV-J05-02-75-112 IV-J05-02D-75-112 IV-05-75/38-112-WH
100 (4")	38	205	Polypropylene (PP)	136	88	116	Double Ball Bearing	(A) 80x60 (B) 101x82 (C) 73x53 (D) 11	IV-J05-04-100-112 IV-J05-01-100-112 IV-J05-01D-100-112 IV-05-100/38-112-WH
125 (5")	40	272	Polypropylene (PP)	163	106	127	Double Ball Bearing	(A) 88x75 (B) 113x100 (C) 81x68 (D) 11	IV-J05-04-125-112 IV-J05-01-125-112 IV-J05-01D-125-112 IV-05-125/40-112-WH
150 (6")	40	310	Polypropylene (PP)	190	120	130	Double Ball Bearing	(A) 88x75 (B) 113x100 (C) 81x68 (D) 11	IV-J05-04-150-112 IV-J05-01-150-112 IV-J05-01D-150-112 IV-05-150/40-112-WH

PRODUCT	Wheel material	Wheel dia(mm)	Tread width (mm)	Load Capacity (kg.) Per Pc	Load Height (mm)	Bearing	Thread Size (mm)	NO. Model
	Thermoplastic Rubber (TPR)	100 (4")	25	50	129	Single Ball Bearing	M 12x25	IV-S08-02-100-421 IV-S08-02D-100-421



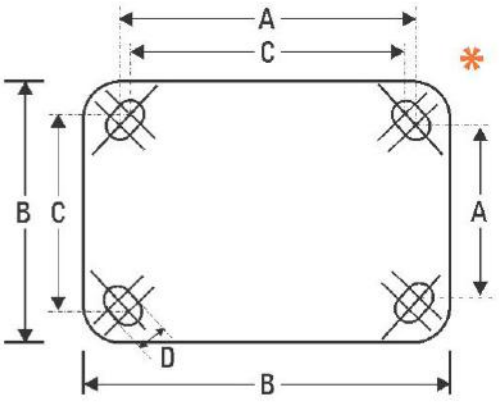

Skidproof Polyurethane Wheels with PP Core Double Ball Bearing



IV-J07-04-100-252



IV-J07-01-150-252



IV-J07-01D-200-252



100/125/150/200-252




Wheel Construction

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Bearing	*	NO. Model
100 (4")	45	235	Polyurethane (PU-S)	143	87	139	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-100-252 IV-J07-01-100-252 IV-J07-01D-100-252 IV-07-100/45-252-WH
125 (5")	45	295	Polyurethane (PU-S)	164	104	149	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-125-252 IV-J07-01-125-252 IV-J07-01D-125-252 IV-07-125/45-252-WH
150 (6")	45	350	Polyurethane (PU-S)	190	121	150	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-150-252 IV-J07-01-150-252 IV-J07-01D-150-252 IV-07-150/45-252-WH
200 (8")	45	370	Polyurethane (PU-S)	240	158	172	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-200-252 IV-J07-01-200-252 IV-J07-01D-200-252 IV-07-200/45-252-WH

J07 SUPO 290-505kg



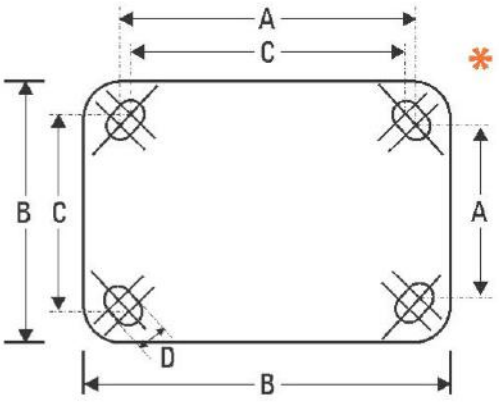

Polyurethane Wheel with C.I. Core Double Ball Bearing



100/150/200-302



Wheel Construction



IV-J07S-04-150-302



IV-J07S-01-150-302




IV-J07-01D-150-362

Wheel dia (mm)	Tread width (mm)	Load capacity (kg) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Bearing	*	NO. Model
100 (4")	45	290	Polyurethane (PU)	143	87	139	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-100-302 IV-J07-01-100-302 IV-J07-01D-100-302 IV-07-100/45-302-WH
150 (6")	45	440	Polyurethane (PU)	190	121	150	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-150-302 IV-J07-01-150-302 IV-J07-01D-150-302 IV-07-150/45-302-WH
200 (8")	45	505	Polyurethane (PU)	240	158	172	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-200-302 IV-J07-01-200-302 IV-J07-01D-200-302 IV-07-200/45-302-WH
150 (6")	45	440	Polyurethane (PU-O) (362)	190	121	150	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-150-362 IV-J07-01-150-362 IV-J07-01D-150-362 IV-07-150/45-362-WH

Polypropylene Wheel With Double Ball Bearing



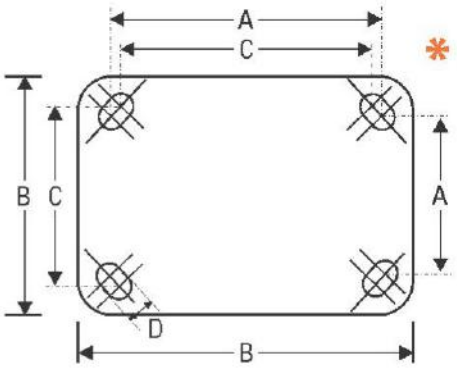



IV-J07-04-150-122



IV-J07-01-200-122



IV-J07-01D-100-122




Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Bearing	*	NO. Model
100 (4")	45	280	Polypropylene (PP)	143	87	139	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-100-122 IV-J07-01-100-122 IV-J07-01D-100-122 IV-07-100/45-122-WH
125 (5")	45	340	Polypropylene (PP)	164	104	149	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-125-122 IV-J07-01-125-122 IV-J07-01D-125-122 IV-07-125/45-122-WH
150 (6")	45	400	Polypropylene (PP)	190	121	150	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-150-122 IV-J07-01-150-122 IV-J07-01D-150-122 IV-07-150/45-122-WH
200 (8")	45	440	Polypropylene (PP)	240	158	172	Double Ball Bearing	(A) 92x67 (B) 115x100 (C) 76x76 (D) 11	IV-J07-04-200-122 IV-J07-01-200-122 IV-J07-01D-200-122 IV-07-200/45-122-WH



Polypropylene Wheels With Single Ball Bearing



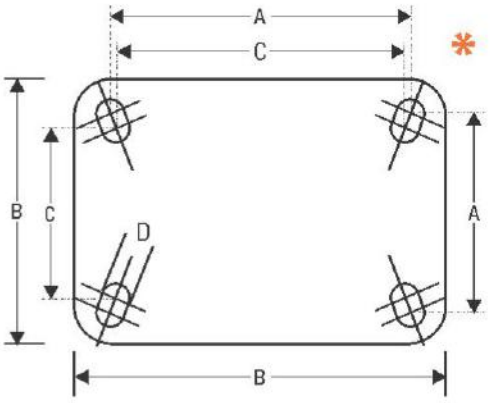



IV-Z08-04-75-121



IV-Z08-01-50-121



IV-Z08-01D-100-121



IV-Z08-02-75-121



IV-Z08-02D-75-121

Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg) Per Pc	Wheel Material	Loading Hight (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	*	NO. Model
50 (2")	20	35	Polypropylene (PP)	77	52	84	Single Ball Bearing	(A) 46x35 (B) 60x49 (C) 45x30 (D) 6.5 Thread Size (mm) M10x20	IV-Z08-04-50-121 IV-Z08-01-50-121 IV-Z08-01D-50-121 IV-Z08-02-50-121 IV-Z08-02D-50-121 IV-08-50/20-121-WH
63 (2½)	20	45	Polypropylene (PP)	90	59	88	Single Ball Bearing	(A) 53x37 (B) 70x52 (C) 52x30 (D) 6.5 Thread Size (mm) M10x20	IV-Z08-04-63-121 IV-Z08-01-63-121 IV-Z08-01D-63-121 IV-Z08-02-63-121 IV-Z08-02D-63-121 IV-08-63/20-121-WH
75 (3")	25	72	Polypropylene (PP)	104	69	99	Single Ball Bearing	(A) 55x43 (B) 73x60 (C) 54x36 (D) 8.5 Thread Size (mm) M12x25	IV-Z08-04-75-121 IV-Z08-01-75-121 IV-Z08-01D-75-121 IV-Z08-02-75-121 IV-Z08-02D-75-121 IV-08-75/25-121-WH
100 (4")	25	81	Polypropylene (PP)	129	85	109	Single Ball Bearing	(A) 55x43 (B) 73x60 (C) 54x36 (D) 8.5 Thread Size (mm) M12x25	IV-Z08-04-100-121 IV-Z08-01-100-121 IV-Z08-01D-100-121 IV-Z08-02-100-121 IV-Z08-02D-100-121 IV-08-100/25-121-WH

J10 SUPO® 2000-4000kg

■ **Wheel and material introduction**




Code No. J10-PA-M



Bearing Structure

Ultra heavy duty PA wheel
Size : 150/200/250/300 (mm)

■ **Horn construction :**

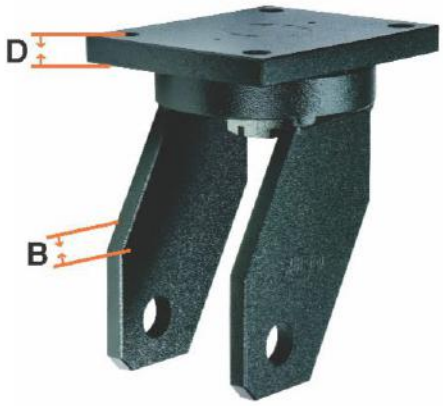

- **D:6" 15mm 8"-12" 19mm**
  B-6" 10mm 8" 12mm
  10" - 12" 15mm

Nylon wheel with Taper Roller Bearing



- **Coniform bearing**

PRODUCT	Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc	Wheel material	Loading hight (mm)	Swivel radius (mm)	Plate size (mm)	Bearing	NO. Model
	**150 (6")**	70	**2000**	PA	217	119	(A) 125x90 (B) 160x125 (D) 15	Taper Roller Bearing	IV-J10-04-150-615 IV-J10-01-150-615
	200 (8")	70	**2500**	PA	275	152	(A) 140x100 (B) 175x135 (D) 15		IV-J10-04-200-615 IV-J10-01-200-615
	**250 (10")**	85	**3000**	PA	330	187	(A) 160x120 (B) 200x160 (D) 17		IV-J10-04-250-615 IV-J10-01-250-615
	300 (12")	85	**4000**	PA	380	215	(A) 170x130 (B) 210x170 (D) 17		IV-J10-04-300-615 IV-J10-01-300-615

JT-13 SUPO® 50-750kg

PRODUCT	Wheel dia (mm)	Adjustable Height(mm)	Load capacity (kg.) / Wheel	Loading hight (mm)	Swivel radius (mm)	Plate size (mm)	NO. Model
	**40x18.5**	10	**50**	73.5	51	(A) 42x42 (B) 55x55x3 (D) 7	IV-JT13-01-40F-643
	60x23.5	10	**250**	86	63	(A) 58x58 (B) 73x73x5 (D) 7	IV-JT13-01-60F-643
	**80x30**	15	**500**	109	75	(A) 70x70 (B) 90x90x5 (D) 9	IV-JT13-01-80F-643
	100x30.5	12	**750**	121	90.5	(A) 70x70 (B) 95x95x5 (D) 11	IV-JT13-01-100F-643

J11, J12 SUPO® 150-600kg

Nylon Wheel With Double Ball Bearing



IV J11

Nylon Wheel With Derlin Bush Bearing



IV J12

Nylon Size: 63/75(mm)

Nylon Size: 40/50/63/75(mm)

PRODUCT	Wheel material	Wheel dia (mm)	Tread width (mm)	Load Capacity (kg) Per Pc	Load Height (mm)	Bearing	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	NO. Model
	NYLON	63(2.5")	50	550	93	Double Ball Bearing	107X82	(A) 85X60 (C) 80X60	ϕ10.5	IV-J11-04-63-612
		75(3")		600	104					IV-J11-04-75-612
	NYLON	63(2.5")	50	550	93	Double Ball Bearing	107X82	(A) 85X60 (C) 80X60	ϕ10.5	IV J11-01-63-612
		75(3")		600	104					IV J11-01-75-612
	NYLON	40(1.6")	50	150	62	Derlin	95X66	(A) 78X45 (C) 71X45	ϕ8.5	IV J12-04-40-613
		50(2.0")		180	72					IV J12-04-50-613
		63(2.5")		200	85					IV J12-04-63-613
		75(3")		250	99					IV J12-04-75-613
	NYLON	40(1.6")	50	150	62	Derlin	95X66	(A) 78X45 (C) 71X45	ϕ8.5	IV J12-01-40-613
		50(2.0")		180	72					IV J12-01-50-613
		63(2.5")		200	85					IV J12-01-63-613
		75(3")		250	99					IV J12-01-75-613

PRODUCT	Wheel material	Wheel dia (mm)	Tread width (mm)	Load Capacity (kg)/Pc.	Bearing	Inner Size (mm)	Outer Size (mm)	NO. Model
 Without Bearing	PA	80 (3.2")	59	400	6204	47	20	IV-21-80/59-622-PA
			69	400				IV-21-80/69-622-PA
			79	450				IV-21-80/79-622-PA
			89	500				IV-21-80/89-622-PA
			99	550				IV-21-80/99-622-PA
	PP		69	300				IV-21-80/69-112-PP
 Without Bearing	PA	180 (7")	50	650	6205	52	25	IV-21-180/50-612-PA
		200 (8")		700				IV-21-200/50-612-PA
	PP	180 (7")	50	500	6205	52	25	IV-21-180/50-112-PP
		200 (8")		600				IV-21-200/50-112-PP

J17 SUPO® 700-2000kg



IV-J17-04-150-282



IV-J17-01D-150-282






J17-01D-150-352



J17-04-150-352

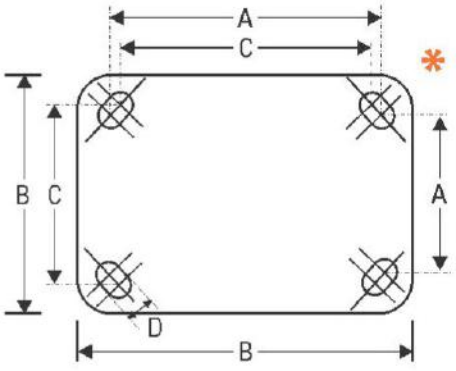

Wheel dia (mm)	Tread width (mm)	Load capacity (kg) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Bearing	*	NO. Model
150 (6")	52	700	Polyurethane (282)	200	131	148	Taper Roller Bearing	(A) 92x62 (B) 115x100 (C) 76x76 (D) 11	IV-J17-04-150-282 IV-J17-01-150-282 IV-J17-01D-150-282
200 (8")	55	900	Polyurethane (282)	251	165	162			IV-J17-04-200-282 IV-J17-01-200-282 IV-J17-01D-200-282
Wheel dia (mm)	Tread width (mm)	Load capacity (kg) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Bearing	Plate size (mm)	NO. Model
150 (6")	50	600	Polyurethane (PU-B) (352)	200	123	148	Taper Roller Bearing	(A) 92x62 (B) 115x100 (C) 76x76 (D) 11	IV-J17-04-150-352 IV-J17-01-150-352 IV-J17-01D-150-352
200 (8")	50	800	Polyurethane (PU-B) (352)	251	158	162			IV-J17-04-200-352 IV-J17-01-200-352 IV-J17-01D-200-352
250 (10")	65	1000	Polyurethane (PU-B) (352)	307	193		Taper Roller Bearing	(A) 150x109 (B) 180x140 (C) 150x91 (D) 11	IV-J17-04-250-352 IV-J17-01-250-352
300 (12")	65	1200	Polyurethane (PU-B) (352)	355	226				IV-J17-04-300-352 IV-J17-01-300-352





IV-C01-04-25-414


IV-C01-01-38-414


IV-C01-02E-75-414


IV-C01-02-50-414


IV-C01-02E-75-414




Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Bearing	*	NO. Model
25 (1")	13	6	Thermoplastic Rubber (TPR)	35	25	46	Derlin	A) 30x24 B) 38x33 D) 4.3	IV-C01-04-25-414 IV-C01-01-25-414 IV-C01-01E-25-414
38 (1½")	18	18	Thermoplastic Rubber (TPR)	50.5	36	56	Derlin	A) 36x28 B) 46x38 D) 5.3	IV-C01-04-38-414 IV-C01-01-38-414 IV-C01-01E-38-414
50 (2")	22	25	Thermoplastic Rubber (TPR)	65	48	71	Derlin	A) 46x35 B) 59x47 D) 6.5	IV-C01-04-50-414 IV-C01-01-50-414 IV-C01-01E-50-414
								M8x20	IV-C01-02-50-414 IV-C01-02E-50-414
75 (3")	28	45	Thermoplastic Rubber (TPR)	93	66	90	Derlin	A) 55x42 B) 70x58 D) 8.5	IV-C01-04-75-414 IV-C01-01-75-414 IV-C01-01E-75-414
								M12x25	IV-C01-02-75-414 IV-C01-02E-75-414

High-Temperature Wheel


IV-J03-04-100-633


IV-J03-01-100-633



Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Bearing	*	NO. Model
100 (4")	32	105	260°C Hi-Temp Nylon	130	88	121	Derlin	(A) 78x45 (B) 95x66 (C) 71x45 (D) 8.5	IV-J03-04-100-633 IV-J03-01-100-633
150 (6")	40	200	260°C PA	190	120	130	Double Ball Bearing	(A) 88x75 (B) 113x100 (C) 81x68 (D) 11	IV-J05-04-150-652 IV-J05-01-150-652

JP23 & Z-19 SUPO® Polyurethane With Single Ball Bearing

NYLON FORK



IV-JP23-04-75-201



IV-JP23-01-100-201



IV-JP23-01D-75-201



IV-JP23-02-75-201



IV-JP23-02D-125-201

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)	Bearing	NO. Model
75 (3")	32	**100**	Polyurethane (PU)	111 — 111.5	73	103	(A) 74x45 (C) 71x45 (B) 98x66 (D) 8.5 **Thread size (mm) M12x25**	Single Ball Bearing	IV-JP23-04-75-201 IV-JP23-01-75-201 IV-JP23-01D-75-201 IV-JP23-02-75-201 IV-JP23-02D-75-201
100 (4")	32	**130**	Polyurethane (PU)	136 — 136.5	87	111	(A) 74x45 (C) 71x45 (B) 98x66 (D) 8.5 **Thread size (mm) M12x25**	Single Ball Bearing	IV-JP23-04-100-201 IV-JP23-01-100-201 IV-JP23-01D-100-201 IV-JP23-02-100-201 IV-JP23-02D-100-201
125 (5")	32	**142**	Polyurethane (PU)	161 — 161.5	100	119	(A) 74x45 (C) 71x45 (B) 98x66 (D) 8.5 **Thread size (mm) M12x25**	Single Ball Bearing	IV-JP23-04-125-201 IV-JP23-01-125-201 IV-JP23-01D-125-201 IV-JP23-02-125-201 IV-JP23-02D-125-201

PRODUCT	Wheel material	Wheel dia(mm)	Tread width (mm)	Load Capacity (kg.) Per Pc.	Load Height (mm)	Bearing	Swivel radius (mm)	Plate size (mm)	NO. Model
	Polypropylene (PP)	60	24	70	85.5	Single Ball Bearing	61	(A) 64x50 (B) 84x67 (D) 7	IV-Z19-01-60-111 IV-19-60/24-111
	Polypropylene (PP)	80	24	90	105.5	Single Ball Bearing	79	(A) 72x52 (B) 90x72 (D) 7	IV-Z19-01-80-111 IV-19-80/24-111

Wheel and Material



Solid Rubber Tyre



Wheel Structure



Pneumatic Rubber Tyre



Wheel Structure

Solid Rubber Tyre Size: 150/200/250(mm)
Foam ER

Pneumatic Rubber Tyre Size: 200/250(mm)
Air Pressure: 4kg/cm²

PRODUCT	Wheel material	Wheel dia (mm)	Tread Width (mm)	Load Capacity (kg.) Per Pc.	Load Height (mm)	Swivel Radius (mm)	Bearing	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	NO. Model
	Solid Rubber Tyre (SRT)	150 (6")	55	150	190		Double Ball Bearing	116X100	(A) 92x67 (C) 76x76	ϕ11	IV-YK27-04-150-542
		200 (8")	63	200	250						IV-YK27-04-200-542
		250 (10")	63	250	295						IV-YK27-04-250-542
	Solid Rubber Tyre (SRT)	150 (6")	55	150	190	125	Double Ball Bearing	116X100	(A)76x76 (B)92x67	ϕ11	IV-YK27-01-150-542
		200 (8")	63	200	250	167					IV-YK27-01-200-542
		250 (10")	63	250	295	190					IV-YK27-01-250-542
											IV-27-150/55-542-WH
											IV-27-200/63-542-WH
											IV-27-250/63-542-WH
	Pneumatic Rubber Tyre (PRT)	200 (8")	64	150	258		Double Ball Bearing	116X100	(A) 92x67 (B) 76x76	ϕ11	IV-YK27-04-200-522
		250 (10")	88	200	308						IV-YK27-04-250-522
											IV-27-200/64-522-WH
											IV-27-250/68-522-WH
	Pneumatic Rubber Tyre (PRT)	200 (8")	64	150	258	167	Double Ball Bearing	116X100	(A)76x76 (B)92x67	ϕ11	IV-YK27-01-200-522
		250 (10")	88	200	308	199					IV-YK27-01-250-522



IV-1M-WP51-01-75-323



IV-1M-WP51-02D-75-323




IV-1M-WP51-01D-100-323



IV-1M-WP51-02D-100-323

D=22Ø
or
D=28Ø



M.S.BUSH



1M-WP51-02D-100-273



1M-WP51-01-100-273



1M-WP51-02-100-273



1M-WP51-01D-75-273

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)	Thread size (mm)	NO. Model
75 (3")	58	60	Polyurethane (PU)	102	64	77	(A)50x40 (B)60x40 (C)76x61 (D)8.5		IV-1M-WP51-01-75-323
									IV-1M-WP51-01D-75-323
				94				M12x25	IV-1M-WP51-02-75-323
									IV-1M-WP51-02D-75-323
100 (4")	58	80	Polyurethane (PU)	125	88	103	(A)60x50 (B)70x55 (C)90x75 (D)8.5		IV-1M-WP51-01-100-323
									IV-1M-WP51-01D-100-323
				121				M12x25	IV-1M-WP51-02-100-323
									IV-1M-WP51-02D-100-323
125 (5")	68	120	Polyurethane (PU)	149	109	120		M12x25	IV-1M-WP21-02(M12)-125-322
									IV-1M-WP21-02D(M12)-125-322
								M16x25	IV-1M-WP21-02(M16)-125-322
									IV-1M-WP21-02D(M16)-125-322

Wheel dia (mm)	Tread width (mm)	Load capacity (kg.) Per Pc.	Wheel material	Loading hight (mm)	Swivel radius (mm)	Brake swivel radius (mm)	Plate size (mm)	Thread size (mm)	NO. Model
75 (3")	58	60	Polyurethane (PU)	102	64	77	(A)50x40 (B)60x40 (C)76x61 (D)8.5		IV-1M-WP51-01-75-273
									IV-1M-WP51-01D-75-273
				94				M12x25	IV-1M-WP51-02-75-273
									IV-1M-WP51-02D-75-273
100 (4")	58	80	Polyurethane (PU)	125	88	103	(A)60x50 (B)70x55 (C)90x75 (D)8.5		IV-1M-WP51-01-100-273
									IV-1M-WP51-01D-100-273
				121				M12x25	IV-1M-WP51-02-100-273
									IV-1M-WP51-02D-100-273
125 (5")	68	120	Polyurethane (PU)	149	109	120		M12x25	IV-1M-WP21-02(M12)-125-272
									IV-1M-WP21-02D(M12)-125-272
								M16x25	IV-1M-WP21-02(M16)-125-272
									IV-1M-WP21-02D(M16)-125-272



SUPO CASTER
YOUR BEST CHOICE FOR TROLLEY
NO.1

Foldable design




When folded, the non-slippe mat on the platform will protect the handle bar from making big noise.



Easy Carry Design
(For 300 kg only)





Elastic Rubber, Non-marking.
Protect your floor and easy to pull.



non-slip mat on the platform


Features: Low-carbon design. Noiseless and comfortable to use. Unique color combination.
Application: Home or office, Workshops or warehouse.
Four ER wheels, Platform, Handle
Material: **PP platform, ER wheels, Steel Handle bar.**

Code	Loading Capacity	Platform height	Size of the platform	Wheel Dia.	Overall height	Total Weight	Starting Force	Wheel Material	Caster Frame	Caster
IV-LO1-D-300-5 GER	300kg	193mm	900x590 mm	125mm	880mm	14.5kg	4-4.5kg	ER	Black Painted	5 inch
IV-LO1-D-150-4 GER	150kg	155mm	720x490 mm	100mm	860mm	10.0kg	2-2.8kg	ER	Black Painted	4 inch

Medical bed metal casters with 3 grades central lock

The best application: Medical bed

Size: 100x32mm 125x32mm 150x35mm

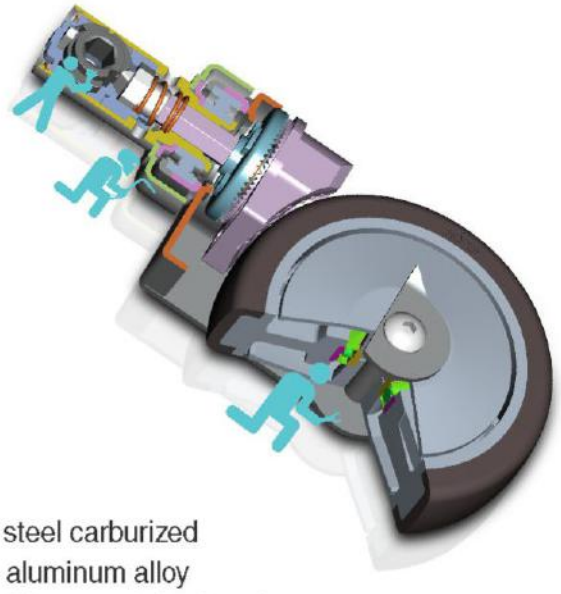




- Brake cam forged by alloy steel carburized
- Insert stem made of zinc - aluminum alloy
- Wheel bearing use the A - Class precision bearing
- Brake disc use POM material and increase the brake touch area
- The surround of the bracket become bigger and welding bearing bush

Medical bed metal casters with 2 grades central lock also available

Central lock	Wheel Material	NO. Model	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Bearing	Grip ring stem dia (mm)	Grip ring stem length (mm)
	(TPR)	1M-HP06-05F1-100-451	100(4")	32	110	142	88	Single Ball Bearing	28	96
		1M-HP06-05F1-125-451	125(5")		120	169	103			
		1M-HP06-05F1-150-452	150(6")	35	140	195	117	Double Ball Bearing		
	(TPR)	1M-HP06-05F3-100-451	100(4")	32	110	142	88	Single Ball Bearing	32	50
		1M-HP06-05F3-125-451	125(5")		120	169	103			
		1M-HP06-05F3-150-452	150(6")	35	140	195	117	Double Ball Bearing		

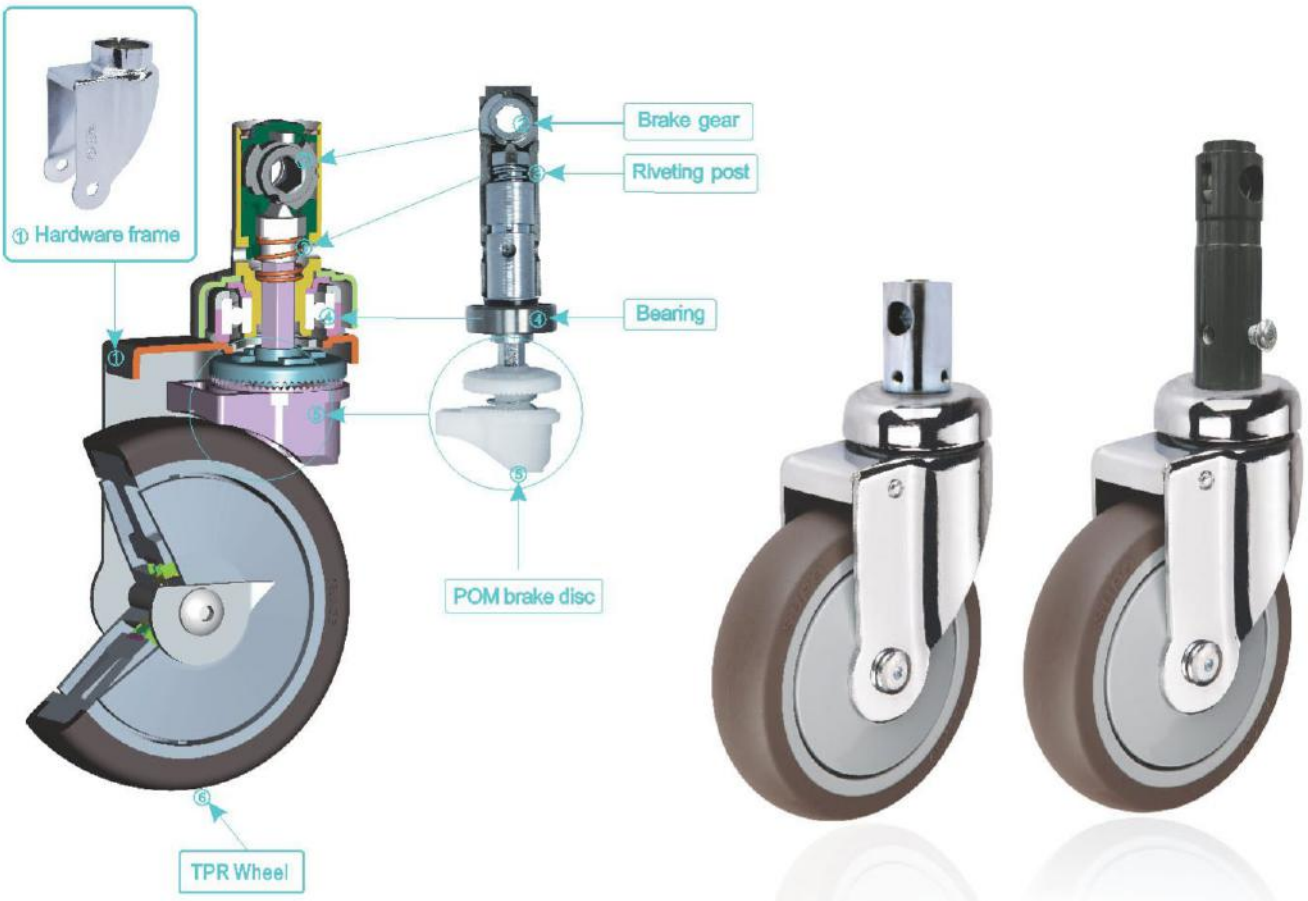

Medical Bed metal casters with 2 grades central lock also available

Central lock	Wheel Material	NO. Model	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Bearing	Grip ring stem dia (mm)	Grip ring stem length (mm)
	(TPR)	1M-C06-05F1-100-451	100(4")	32	110	146	88	Single Ball Bearing	28	96
		1M-C06-05F1-125-451	125(5")		120	171	103			
		1M-C06-05F1-150-452	150(6")	35	140	197	117	Double Ball Bearing		
	(TPR)	1M-C06-05F3-100-451	100(4")	32	110	146	88	Single Ball Bearing	32	50
		1M-C06-05F3-125-451	125(5")		120	171	103			
		1M-C06-05F3-150-452	150(6")	35	140	197	117	Double Ball Bearing		


26 Series

Medical plastic casters-twin wheels

The best application: Medical bed and
Medical equipment

Size: 125x79mm



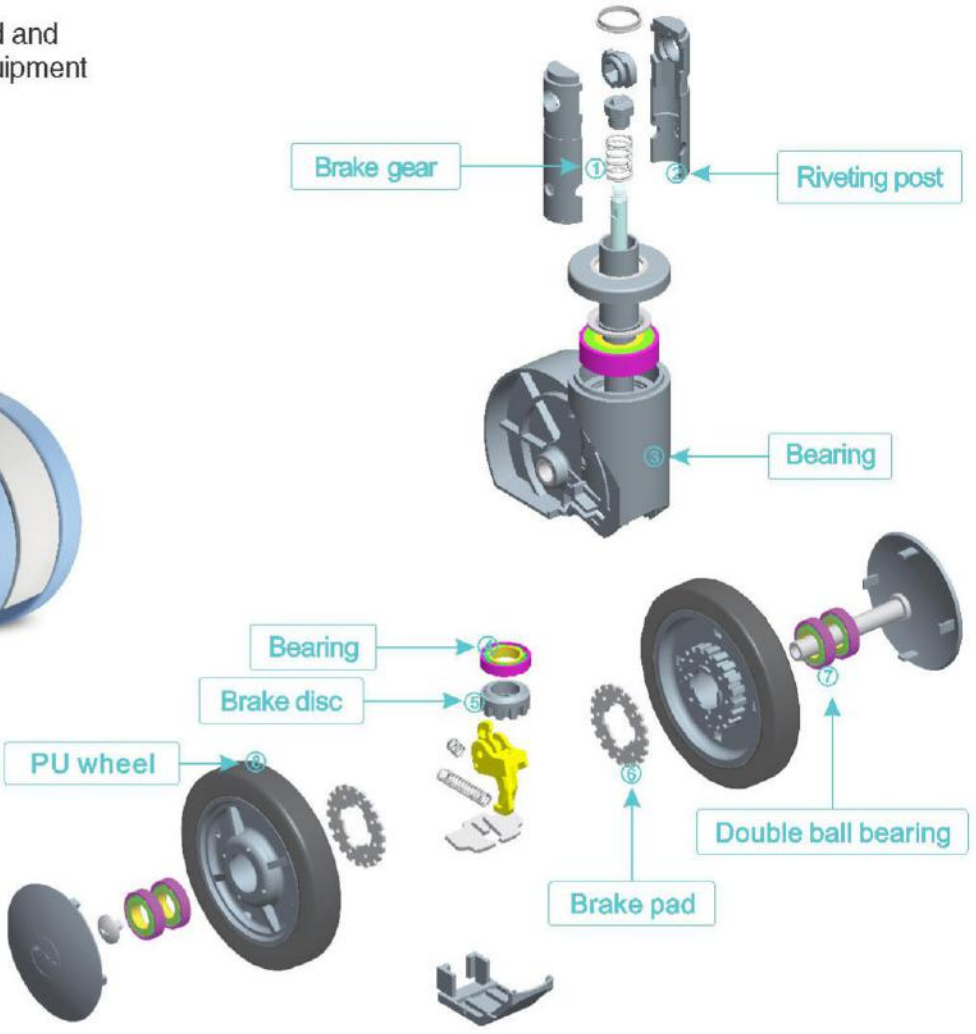


Medical bed plastic casters with 2 grades central lock-twin wheels also available

Central lock	Wheel Material	NO. Model	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Bearing	Grip ring stem dia (mm)	Grip ring stem length (mm)
	(PU)	1M-WP26-05F1-125-272	5"(125)	81	150	144	103	Double Ball Bearing	Φ28	96
		1M-WP26-05F1-150-272	6"(150)	83	165	175	125			
		1M-WP26-05F3-125-272	5"(125)	81	150	144	103		Φ32	50
		1M-WP26-05F3-150-272	6"(150)	83	165	175	125			


06 Series

Medical bed metal casters with 3 grades central lock


Central lock installation

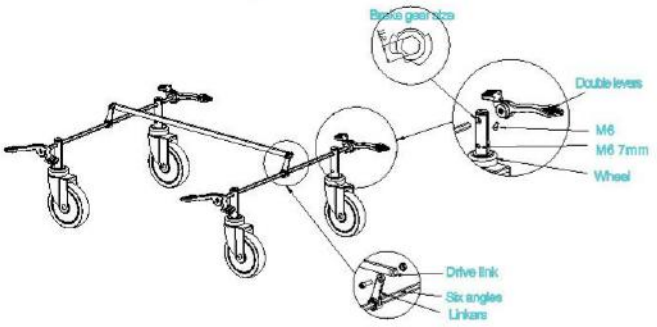

Brake system 2 grades central lock

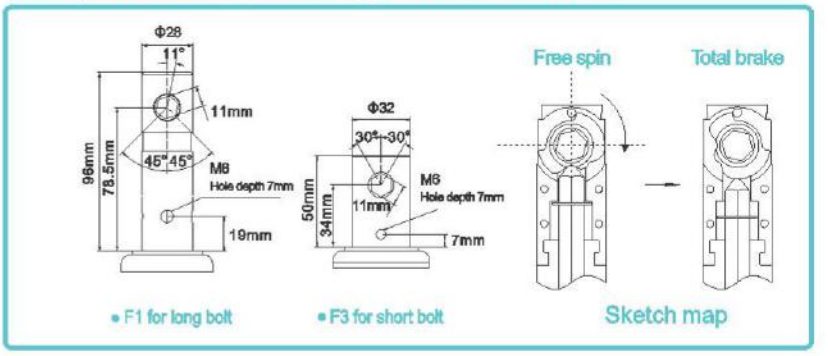


Brake system
3 grades central lock

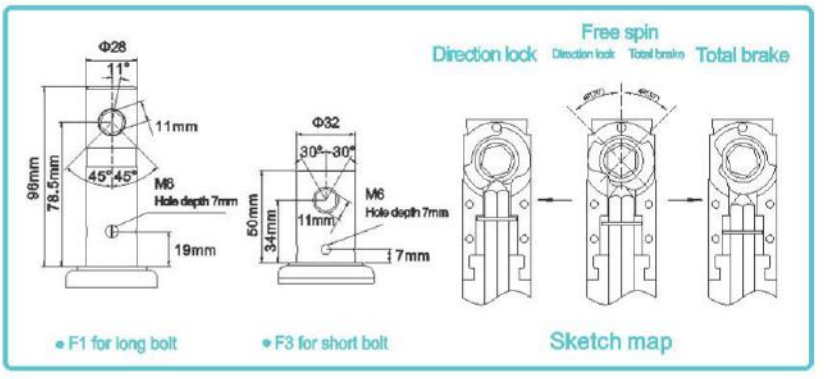


81 Medical casters accessories

● Levers

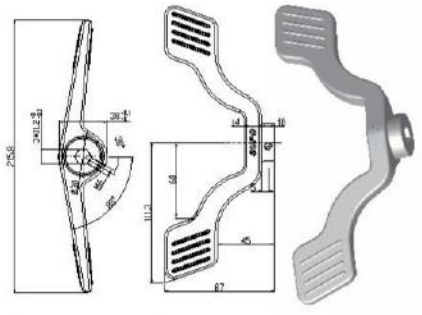

Aluminum alloy twin pedal with hexagonal hole


NO. Model	1M-H81-230-01

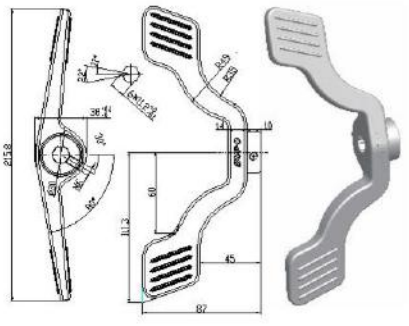

Aluminum alloy twin pedal with quincuncial hole

NO. Model	1M-H81-230-02


● Linkers

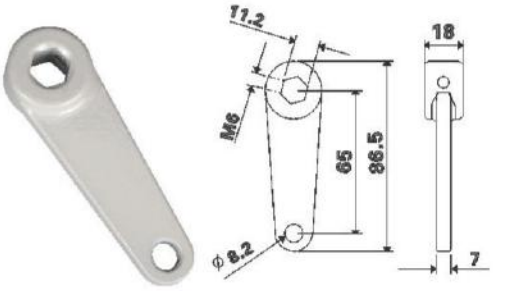

A3 Long linker

NO. Model	1M-H82-11282-01

● Patent products, all right reserved

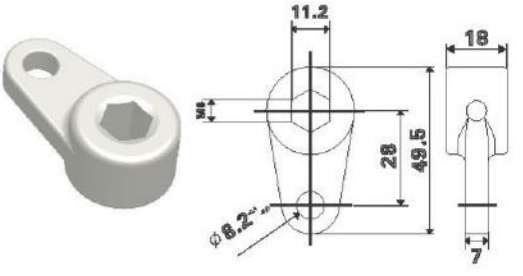

A3 Short linker

NO. Model	1M-H82-11282-02

C means Chrome, WP means White Plastic; HP means Grey Plastic; F1 for long bolt; f3 for short bolt

J30 Series Caster Wheels – Low Height Heavy Duty

Wheel : Nylon-PA Black



New



Item Code	Description	Wheel Size	Load capacity Kg/Wheel	Price /each
IV J30-01-63-662	Swivel Plate	63x65	600 Kg	1900.00
IV J30-04-63-662	Fix	63x65		1200.00
IV J30-01-75-662	Swivel Plate	75x65	700 Kg	2300.00
IV J30-04-75-662	Fix	75x65		1600.00
IV J30-01-100-662	Swivel Plate	100x70	1000 Kg	2800.00
IV J30-04-100-662	Fix	100x70		2100.00

J11 Series Caster Wheels (Low Height Heavy Duty) with single Brake.

New



Item code	Description	Load Capacity Kg/ Wheel	Price /each
IV J11-01E-63-612	Swivel Plate + Single Brake	550 Kg	1200.00
IV J11-01E-75-612	Swivel Plate + Single Brake	600 Kg	1400.00

iVY

SUPO®

HI-TECH CASTER WHEELS



KEEPS THE WORLD MOVING



JAPPL™
TOTAL SOLUTION FOR YOU

Jyoti Architectural Products Pvt. Ltd.

A-111,Sagar Tech Plaza, M. V. Road, Saki Naka Junction, Andheri (E), Mumbai - 400 0072

T +91 22 42421000 **Telefax**: +91 22 42421050

M +91 93208 92981

E salessupport1@jyotiarch.in, salessupport7@jyotiarch.in,

W www.jyotiarch.in

CATALOGUE 10/2015

EQUAL - 3619735550