RFQ → Roller Shutter for JIT Dock 2


Location	SAVW Chakan
Door type	Motorized Rolling Shutter
Clear Width	5000 mm
Clear Height	5000 mm
Door construction	Self-supporting
Wind Load	As per EN 12424
Acoustic insulation	EN 717-1
Thermal Insulation	Appendix B EN 12428
Curtain Weight	To be given by supplier
Bottom Profile	• Bend-resistant bottom profile • One coat of grey epoxy primer by spray
Guide material / surface	• 2 to 2.5mm thick, mild steel with integrated brush seals ensure quiet shutter travel • Two coat of grey epoxy primer by spray
Curtain	Curtain made of single skinned ~~Galvalume~~ steel laths - GI Steel
Curtain colour	Finish - two coats of Polyurethane spray paint over one coat of epoxy primer
Door Travel Speed	0.05-0.1 mtr/sec → Opening 0.05-0.1 mtr/sec → Closing
Drive unit	Direct drive operator with electromagnetic brake
Drive unit position	To be given by supplier
Power supply	400 V ~ / 50 - 60 Hz
Control power voltage	24V
Power input	To be given by supplier
Power rating	To be given by supplier
Release system for manual opening	Crank handle
Control Panel	Plastic control cabinet IP65, travel limit adjustment, shutter push buttonOpen-Emergency Stop-Close with integral automatic timer
Safety devices	Manual Operation by hand chain or hand crank
Addition Important Points	• Three station push button with dead-man control • Wind Lock –Storm Anchors • Unloading & Scaffolding to be in supplier scope • Packaging, Freight , Transit Insurance in supplier scope
MS Structure for above Rolling Shutter	• MS Structure consisting of 100mmx50mm ISMC, 50x50x6mm MS angle with 2 coats of PU paint over 1 coat of epoxy primer.

SKODA | VOLKSWAGEN

ŠKODA AUTO Volkswagen India Private Limited

RFQ → Roller Shutter for JIT Dock 2

Backup – Location of Door Shutters

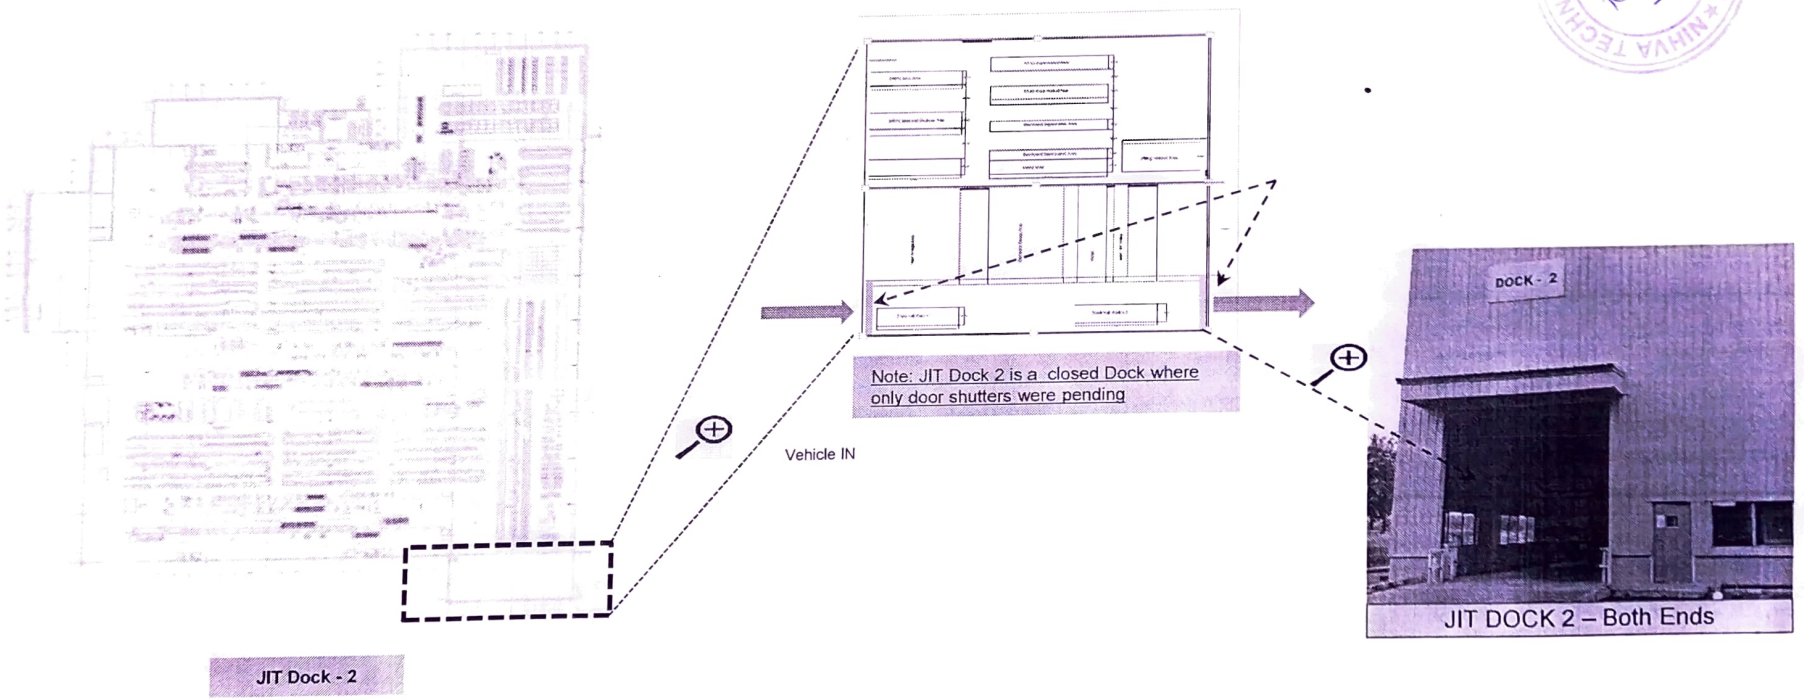

ŠKODA | VOLKSWAGEN
ŠKODA AUTO Volkswagen India Private Limited