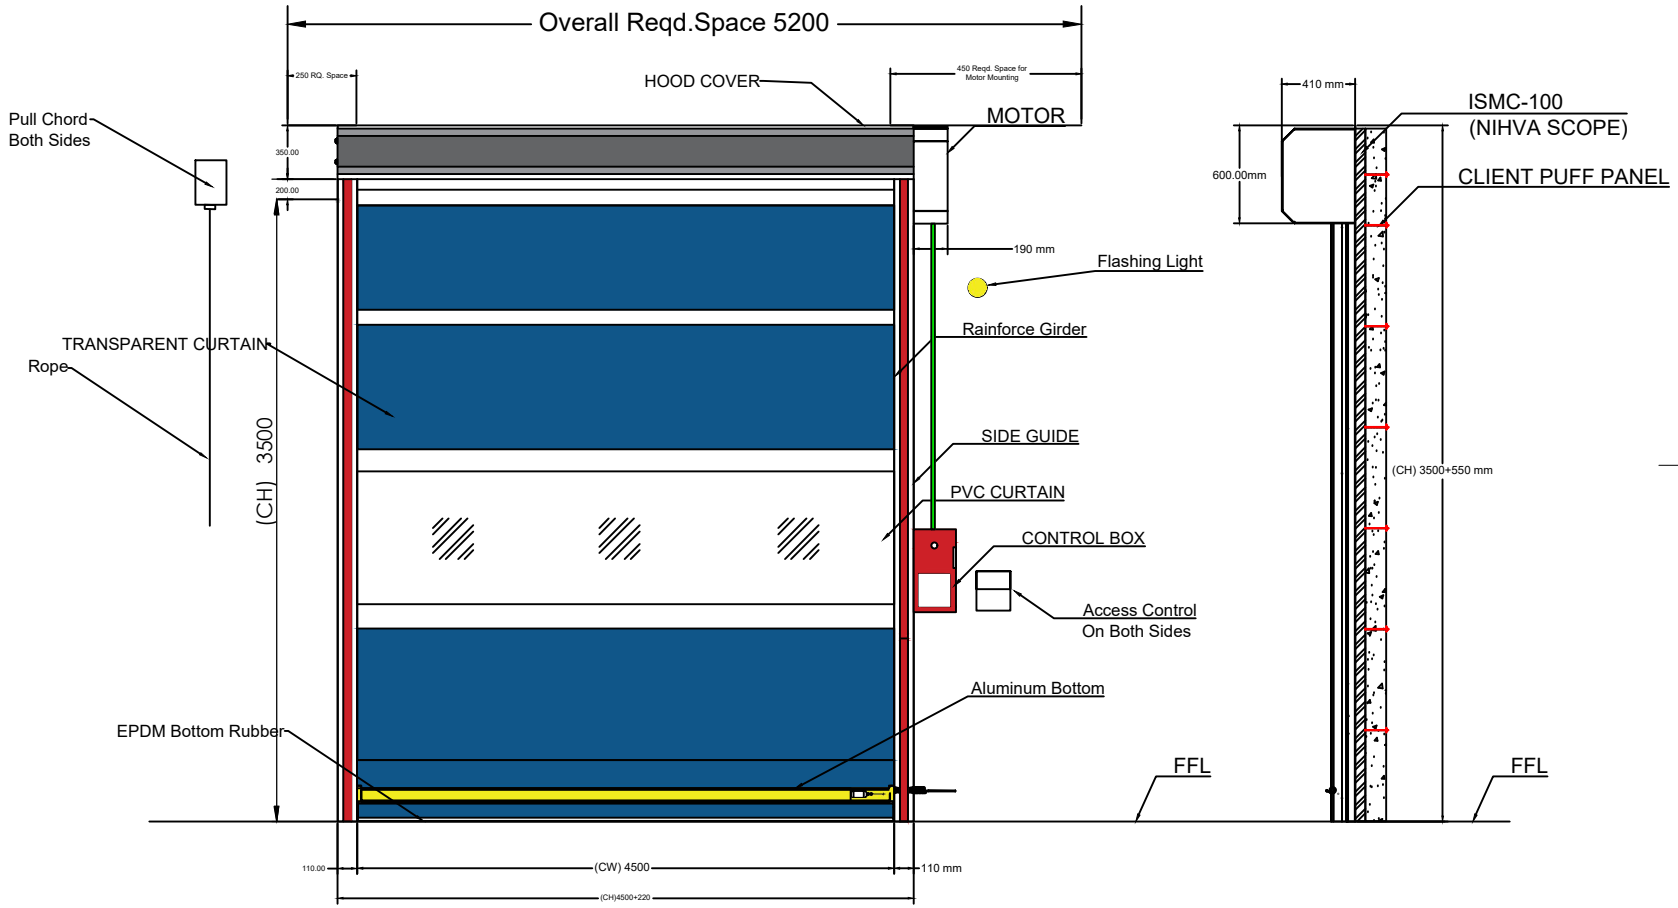


TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	Control Panel	LED Display Servo Controller : - Operating Speed (Adjustable) : 1.4~2.5 min/ Working Temperature : -35 degree to 65 degree - Water Resistant : IP65 Make IDER, manufactured under European Standards
2	Drive	IDER Make ,Manufactured under European Standards,CE Certified
3	Motor Power ,Torque	Power : 1.1 kW Torque : 65 Nm
4	Door Travel Speed	Opening: 2 m/Sec & Closing:0.9m/Sec
5	Safety Device	Safety Photocell Pair & Safety Edges
6	Surface Finish	As Per Client Requirement

NOTE:

(1) All Cables & Ele.Conduits to be provided by RINAC
(2) All Civil Work in Client Scope
(3) Required M.S.Structure & Fittings at Nihva Scope

Sr	Clear Width (CW)	Clear Height (CH)	QTY
1	4500	3500	2

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE : HIGH SPEED DOOR WITHOUT SENSOR GA DRAWING

	NAME	SIGN	DATE
DRAWN	S.J		19.01.2024
CHECK	A.K		19.01.2024
APPRD.	V.T		19.01.2024

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

If any queries contact : projectsupport@nihva.com

CLIENT - RINAC
PROJECT - HIGH SPEED DOOR
FORMAT NO - NIHVA-DD-F-03
DWG. NO. : NIHVA/23-24/00XX
REV- R00
ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: