

Disclaimer note
This is a sketch, please do not scale

Reduced required headroom
(possibility for day light height _<4000mm and without hood)

HS9010P, HS9010PFR, HS9010PEM, HS8010P, HS8020P Left	2010-02-20/RG	NR	503-1	Rev:4

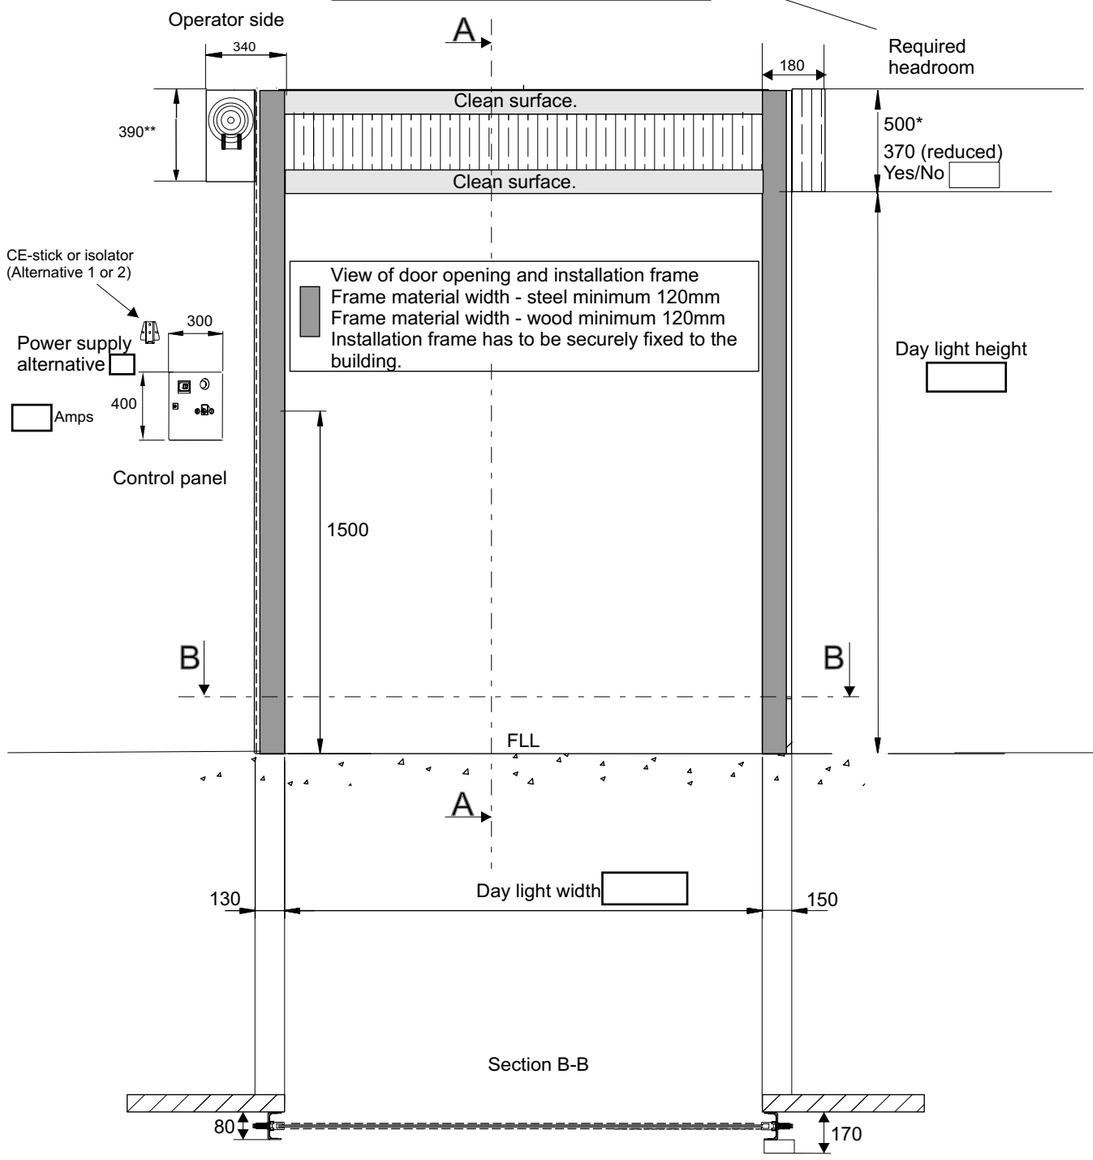

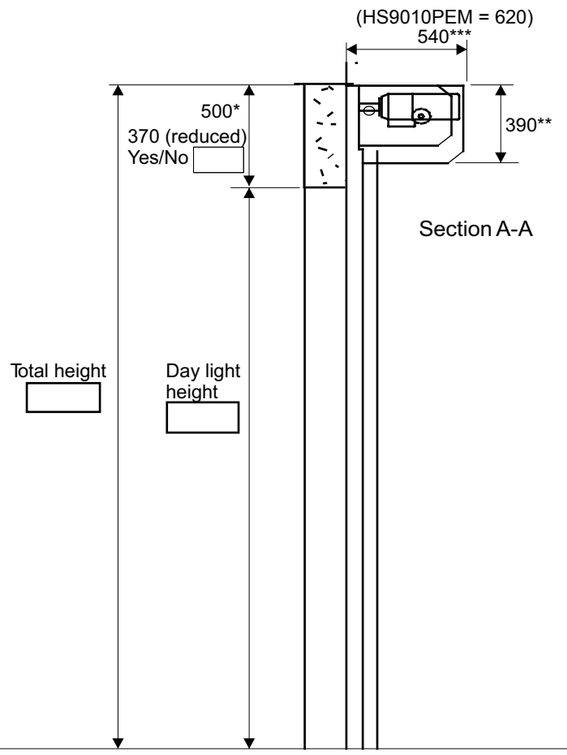

Section A-A

* 650 if drum hood and H>4000mm
**600 if drum hood and H>4000mm
***650 if drum hood and H>4000mm

Power supply for the operator:

HS9010P
16 amp (max) for a door surface up to 14m^2

HS9010P door surface larger than 14m^2

HS9010PFR, HS9010PEM, HS8010P, HS80120P 25Amp (max)

Alternative 1.
1- phase, 230V with CE-stick (by others) to be located within 0,5m from the control box.

Alternative 2.
1-Phase, 230V with isolator (by others adjacent to the control unit

Alternative 3.
1-Phase, 230V to be installed direct (by others) in to the control box.

Required space within the building from the installation frame

Connection area in line with side frames

NB! Required buildt in space

All dimensions indicated are net: It will be necessery to add the required space for installation and maintenance.
Reduced dimensions: on request.

Without covers:
Top + 150, motor side (at motor level) +150, other side + 100. Front +500

With covers:
Top + 200, motor side (at motor level) + 250, other side + 200, front + 500

ASSA ABLOY contact	

Power supply
Alternative

Pos	Quantity	Day light width	Day light height	Depth	Side space left	Side space right	Total height	Reduced headroom		Power supply
				540	340/130	180/150		Yes/No		Amps

Quote/Ordernumber	
Date	
Drawn by	

Project:

Notes:

ASSA ABLOY

www.assaabloyentrance.com

Copyright ASSA ABLOY Entrance Systems AB