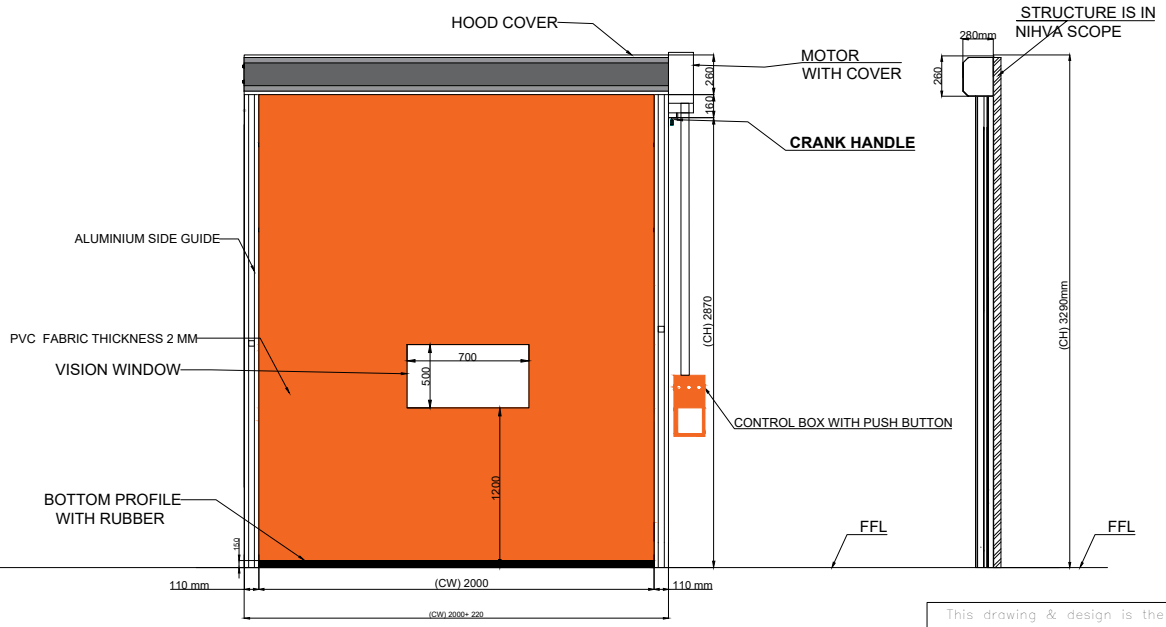


TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	USE	INTERNAL DOOR
2	MOUNTING	ON STRUCTURE: INSIDE / OUTSIDE
3	CURTAIN PANEL	PVC FABRIC THICKNESS 2 MM.
4	MANUAL RELEASE	CRANK HANDLE
5	DOOR TRAVEL SPEED	OPENING: UPTO 1.5M/SEC & CLOSING: 0.8 M/SEC
6	SAFETY DEVICE	1800 MM HEIGHT LIGHT CURTAIN
7	ACCESSORIES	THREE WAY PUSH BUTTON
8	RAL CODE	ORANGE

HIGH SPEED ROLL UP DOOR SIZES :-

SR	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	**2000**	**2870**	02

NOTE :-
1. All DIMENSIONS ARE IN MM.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	DOOR AUTOMACTION		
	NAME	SIGN	DATE
DRAWN	J.P		16.01.2026
CHECK	B.S		16.01.2026
APPRD.	V.T		16.01.2026
If any queries contact : Design@nihva.com			
ALL DIMENSION ARE IN mm			

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - TENNECO CLEAN AIR
PROJECT - MACHINE PROTECTION DOOR
FORMAT NO - NIHVA-DD-F-03
DWG. NO. : NIHVA/25-26/MP/1308001 | REV- R00
SCALE: NTS | WT: | SHEET: