


DRAWING

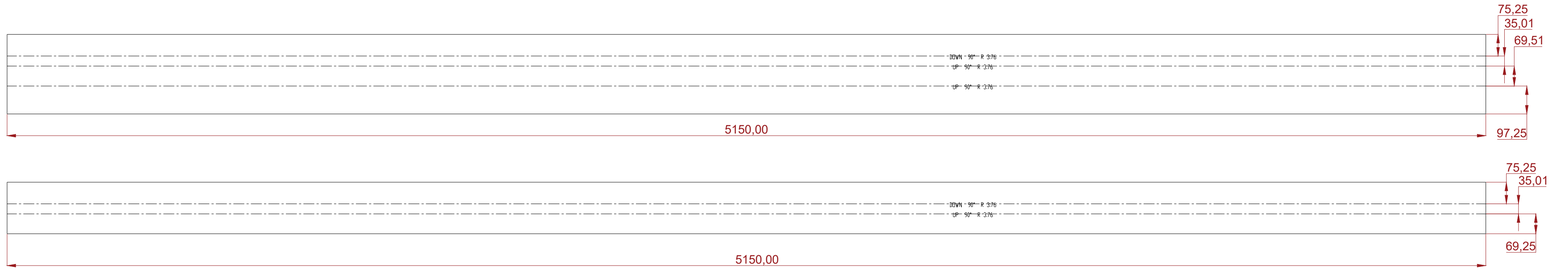





ARCEDGES _ Shutter Size W5000 x H5000 - 1nos
Name - T shape Guide (100X150x3 mm)
Material - MS
Thk - 3 mm
QTY - 02 NOS

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE)
2.	LOCATION AREA	INSIDE AREA / OUTSIDE AREA
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL = ON CONCRETE/STEEL&SIDE
4.	SLAT	GI SLAT- 1.2MM THICK (75 MM WIDTH)
5.	BOTTOM PROFILE	MS PLATE100 x 3.15 MM THICK WITH ANGLE 35X35X5 MM .
6.	GUIDE PROFILE	M.S." T " SHAPED PROFILE 100X150X3 MM THICK.
7.	HOOD COVER & MOTOR COVER	MADE OF GI SHEET THICKNESS 0.9 MM.
8.	SURFACE FINISH	SYNTHETIC ENAMEL PAINT
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON BOTH SIDE

SHUTTER SIZES :- (FOR MANUFACTURING COMPLEX)

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	5000 mm	5000 mm	01

RIVISION.	DATE
REV 01 : SLAT THICKNESS CHANGE 1MM TO 1.2MM BOTTOM PLATE THICKNESS CHANGE 2.5MM TO 3.15MM ANGLE STIFFENER CHANGE 35X35X3 MM TO 35X35X5 MM	03-12-2025

NOTE-
1. ALL CIVIL WORK WILL BE CLIENT'S SCOPE.
2.IF STRUCTURE REQUIRED FOR SHUTTER IS IN CLIENT'S SCOPE.

NOTE : GALVANISATION SHALL BE MIN 230 g/SQ.M
PUSH BUTTON BOTH SIDE

SPECIAL INSTRUCTION'S :

TITLE - DOOR AUTOMATION

DWG NO - NTPL- 300-PM-01

NIHVA Technologies Pvt. Ltd.

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE	PRODUCT - MOTORIZED ROLLING SHUTTER	
DRAWN	V.W.		08-12-2025	PROJECT NO - NTPL- 300	REVISION - 01
CHK'D	B.S.		10-12-2025	SITE LOCATION-GUJARAT	WEIGHT - 56 kg
APPV'D	V.T.		10-12-2025	MATERIAL - MS	QTY - 01 NOS
IF ANY QUERIES CONTACT - Design@nihva.com				PROJECTION METHOD	SCALE :
ALL DIMENSIONS ARE IN 'MM'			A2		SHEET 1 OF 1