

DRAWING

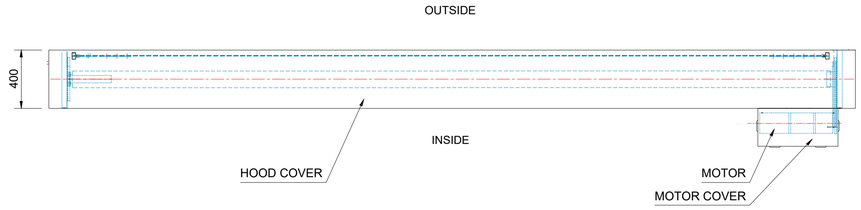





TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE)
2.	LOCATION AREA	INSIDE AREA / OUTSIDE AREA
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL = ON CONCRETE/STEEL&SIDE
4.	SLAT	GI SLAT- 1MM THICK (75 MM WIDTH)
5.	BOTTOM PROFILE	MS PLATE100 x 2.5 MM THICK WITH ANGLE STIFFENER.
6.	GUIDE PROFILE	M.S." T " SHAPED PROFILE 100X150X3 MM THICK.
7.	HOOD COVER & MOTOR COVER	MADE OF GI SHEET THICKNESS 0.9 MM.
8.	SURFACE FINISH	SYNTHETIC ENAMEL PAINT
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	6000 mm	6000 mm	04

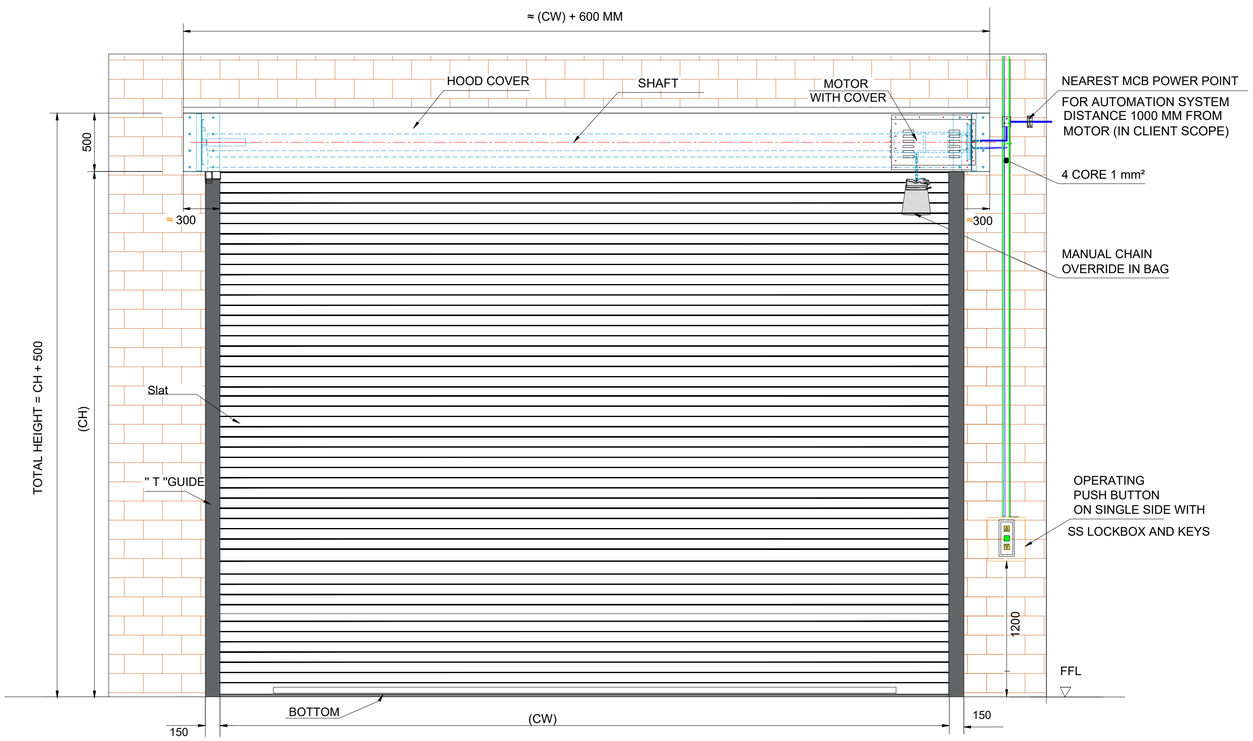

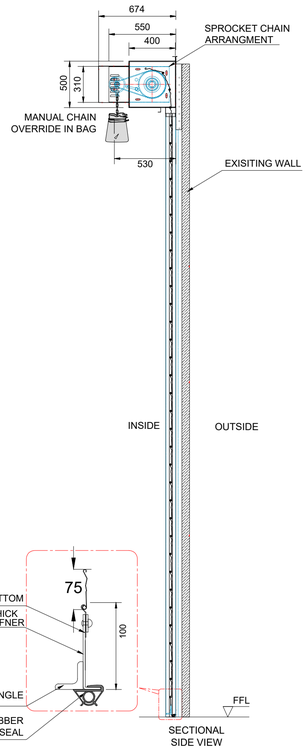

NOTE :

SPECIAL INSTRUCTION'S :

TITLE - DOOR AUTOMATION				NIHVA TECHNOLOGIES PVT.LTD.PUNE Website - www.nihva.com	
DWG NO - NTPL- 000					
	NAME	SIGNATURE	DATE	PRODUCT - MOTORIZED ROLLING SHUTTER	
DRAWN	V.W.		08-08-2025	PROJECT NO - NTPL- 000	REVISION - 00
CHK'D	B.S.		10-08-2025	SITE LOCATION -	WEIGHT -
APPV'D	V.T.		10-08-2025	MATERIAL -	QTY -
IF ANY QUERIES CONTACT - Design@nihva.com				PROJECTION METHOD	SCALE :
ALL DIMENSIONS ARE IN 'MM'		A2			SHEET 1 OF 1