
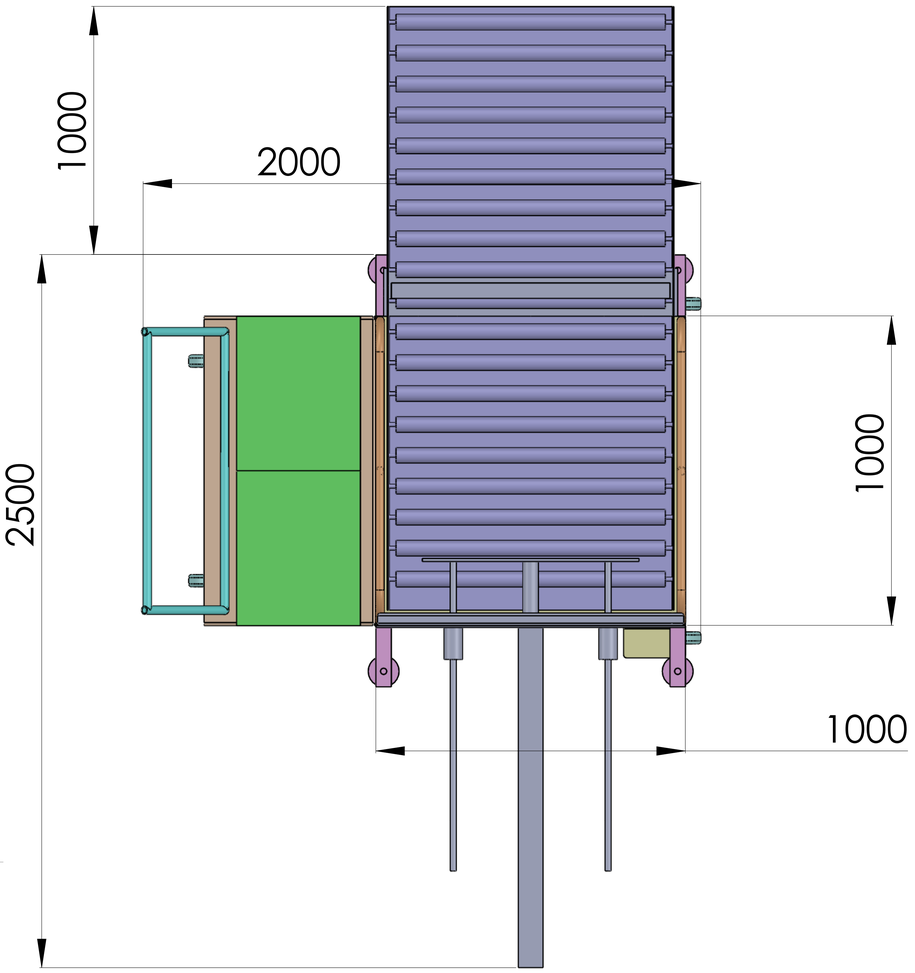



TOP VIEW OF SCISSOR LIFT

TECHNICAL SPECIFICATIONS OF PORTABLE ELECTRO-HYDRAULIC SCISSOR LIFT -

1. CAPACITY - 1000KG
2. PLATFORM SIZE- 1000(L) X 1000(W)
3. CLOSE HEIGHT - 900 MM
4. LIFT HEIGHT - 2000 MM
5. TOTAL HEIGHT - 2900 MM
6. MODE OF OPERATION - LIFTING BY HYDRAULIC CYLINDER
7. FOLDABLE RAILING - 400 MM HEIGHT
8. TOP PLATFORM WITH GRAVITY ROLLERS
9. PENDANT WITH PUSH BUTTON FOR OPERATION
10. OVERALL SIZE WITH OUTTRIGGER CLOSED - 2000(L)X 3500(W) X 1500 (H)
11. PUSHER ARRANGEMENT FOR LOAD PUSHING
12. STOPPER ARRANGEMENT FOR AVOIDING LOAD FALLING DURING OPERATION

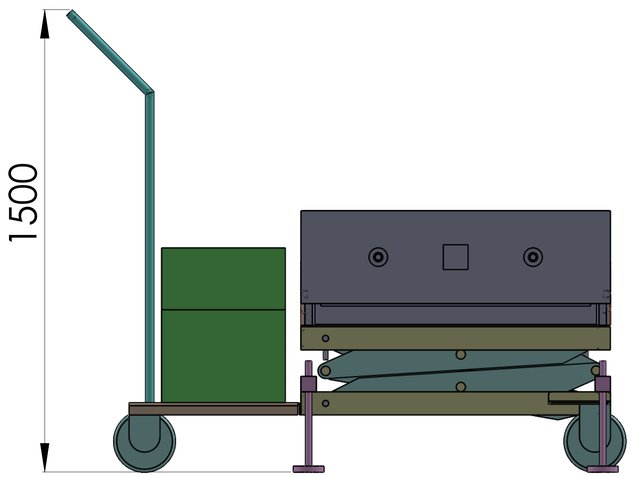

FRONT VIEW OF SCISSOR LIFT

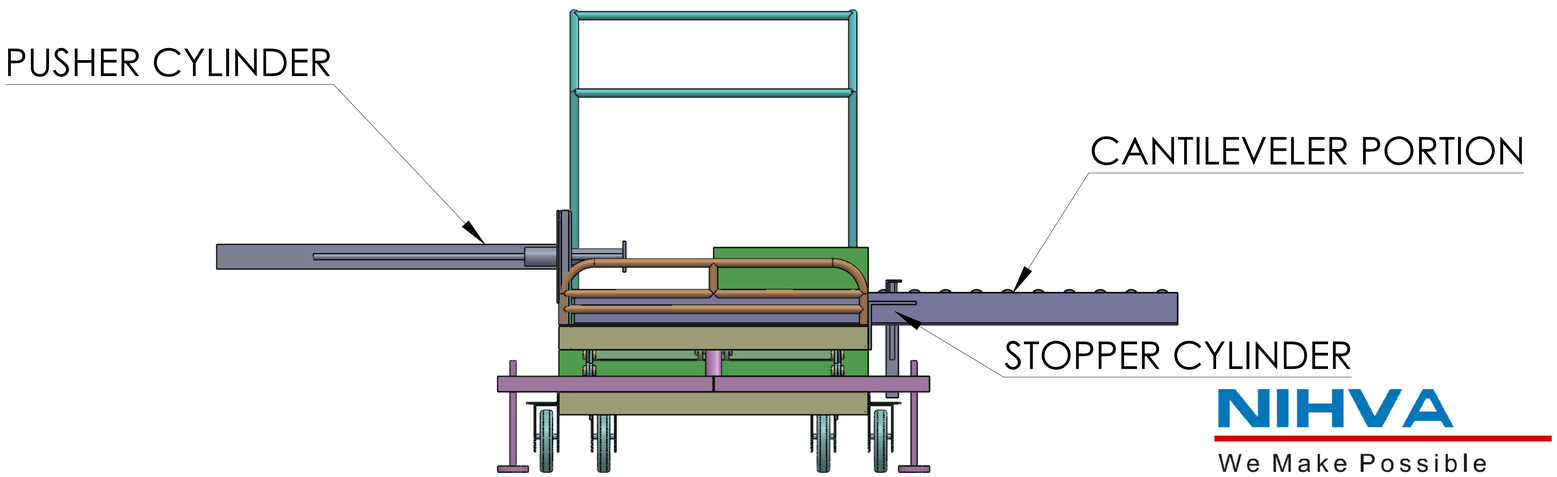

SIDE VIEW OF SCISSOR LIFT

NIHVA
We Make Possible

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:			FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE			TITLE: NIHVA/20-21/0152	
DRAWN							
CHK'D							
APPV'D							
MFG							
Q.A				MATERIAL:		DWG NO. SCISSOR LIFT ASSEMBLY WITH PUSHER	A0
				WEIGHT:		SCALE:1:10	SHEET 1 OF 2


HANDLE FOR SCISSOR LIFT MOVEMENT

BATTERY OPERATED HYDRAULIC POWERPACK WITH CONTROL PANEL

STOPPER ARRANGEMENT FOR AVOIDING LOAD FALLING DURING RAISING OF LOAD

TOP PLATFORM WITH ROLLERS FOR LOAD SLIDING

FOLDABLE RAILING FOR EASY LOADING ON SCISSOR LIFT

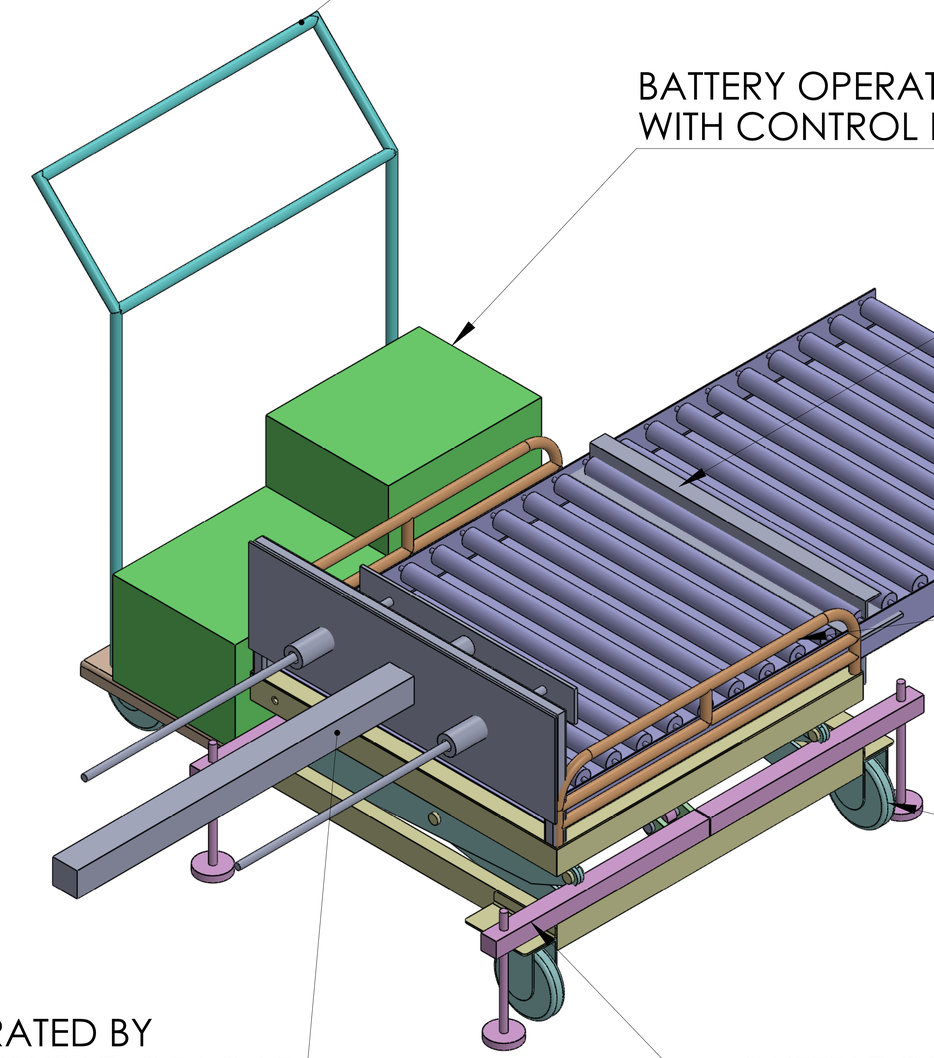

CASTOR WHEEL FOR MOVEMENT

PUSHER ARRANGEMENT OPERATED BY HYDRAULIC CYLINDER FOR PUSHING OF LOAD

OUTTRIGGER FOR STABILITY DURING OPERATION

BATTTERY OPERATED SEMI-ELECTRIC SCISSOR LIFT WITH ROLLERS & PUSHING ARRANGEMENT- R01

NIHVA
We Make Possible

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:			DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING
	NAME	SIGNATURE	DATE		TITLE: NIHVA/20-21/0152
DRAWN					
CHK'D					
APP'D					
MFG					
Q.A					
			MATERIAL:		DWG NO: SCISSOR LIFT ASSEMBLY WITH PUSHER
			WEIGHT:		SCALE:1:10

REVISION

A0

SHEET 2 OF 2