

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

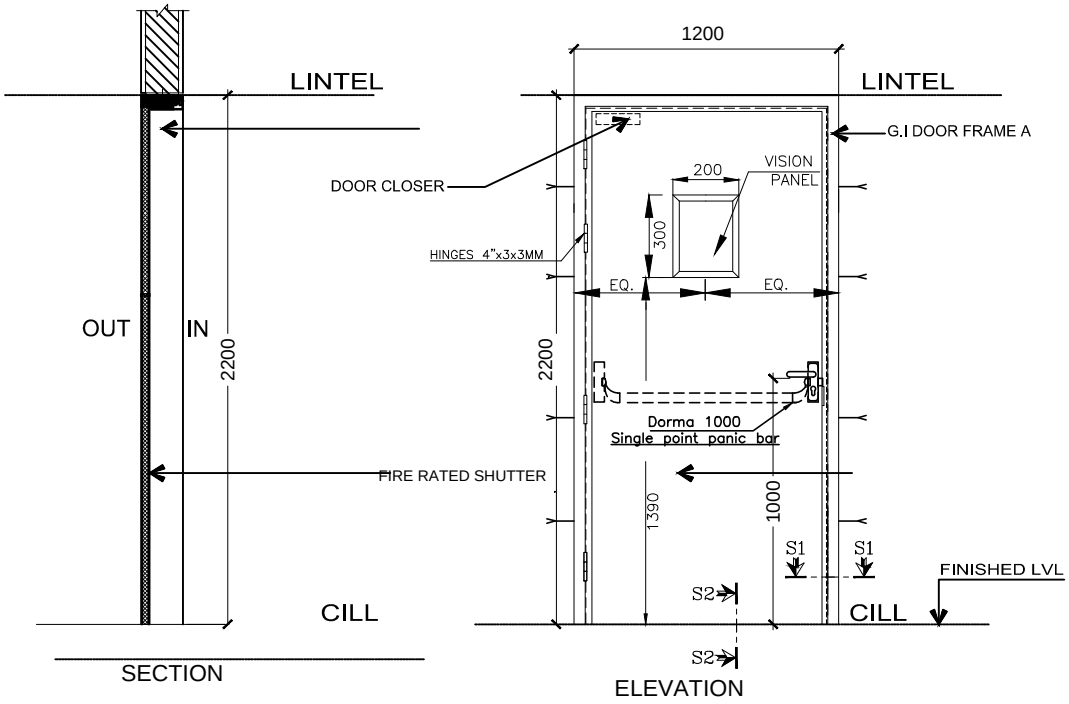


NOTES :-


1) Door Frame shall be fabricated from 1.2mmThk. Glav. steel sheets to form a double rebate profile & fixed to wall with Anchor bolts.
2) Shutter Panels shall be fabricated from 0.8mmThk. Galv.steel having Tray & Cover Construction to provide a nominal thickness of 43mm. Shutter flatness may vary till 5mm.& shutters shall have infill material with reinforcements at top, bottom edges & for hardware fitments.
3) 4nos. of SS Ball Bearing Butt Hinges shall be provided on each Shutter Size 4"x3"X3mm--
4) Dorma PHCR 1000 Panic bar with Outsie trim
5) SS D Handle Pair
6) Door Closer

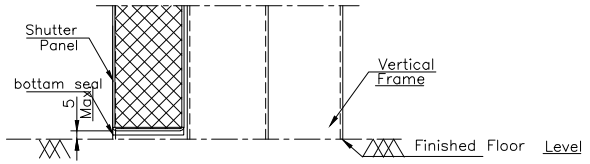

SECTION 'S2-S2'

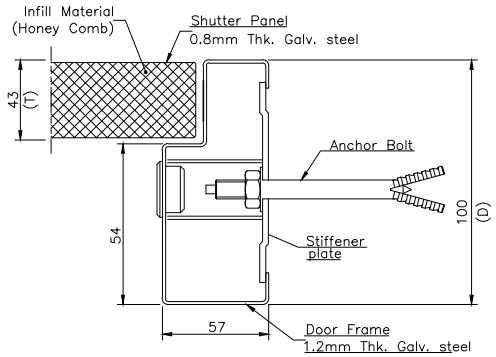

DEATIL-'A'

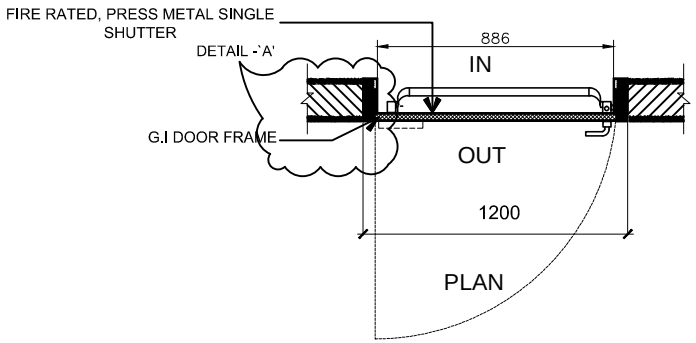

COLOUR: RED

LEFT HAND DOORS.08Nos.

SINGLE LEAF 1200 X 2200 FIRE DOORS

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE: SPECIFICATIONS OF SINGLE LEAF FIRE DOOR			NIHVA TECHNOLOGIES PVT. LTD.
	SIGN	DATE	
DRAWN	ABHIJIT	12/09/15	CLIENT-ZAMIL STEEL BUILDINGS (I) PVT.LTD
CHECK	ANIL	12/09/15	PROJECT -
REV.	01		SITE -
CLIENT APPROVAL			DWG. NO. -NIHVA/15-16/75
			SCALE: 01 / Ref. No. / SHEET: 01
ALL DIMENSION ARE IN mm			If any queries contact : projects@nihva.com

NIHVA TECHNOLOGY PVT. LTD. PUNE.
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT