


TOP VIEW

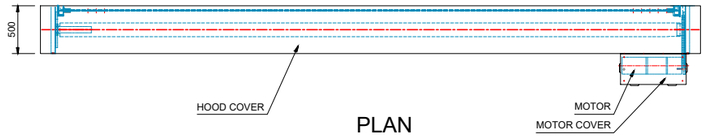


PLAN



" T " TYPE GUIDE

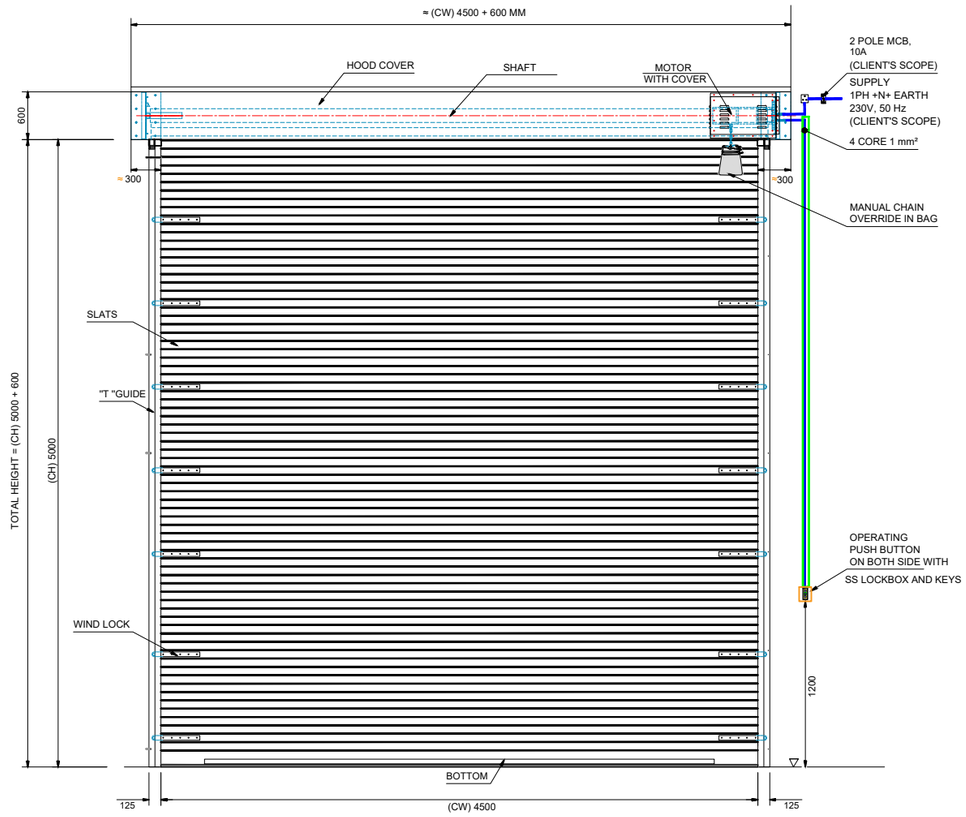

FRONT VIEW

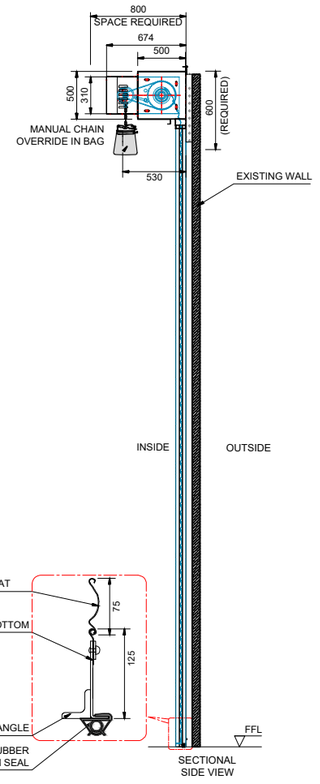

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorised Rolling Shutter (Indirect Drive) with Manual Chain Arrangment
2.	Location Area	Inside / Outside
3.	Mounting Surface	Side Brackets: Optional / Structure
4.	Slat	Curved 75 mm PPGI Sheet - 1.0 mm Thk. & Windlock Considered
5.	Bottom Profile	MS Plate 125 x 2.5 mm thick with Angle Stiffner with rubber seal
6.	Guide Profile	M.S." T " Shape profile 125 x 3.0 mm Thk.
7.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
8.	Accessories	Push Button On Both Side

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	4500	5000	02

Note :-

1. All Dimension are in mm
2. This drawing is only for understanding purpose

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	
DRAWN	S.S.	08/10/2024	CLIENT -
CHECK	S.W.	08/10/2024	PROJECT - MOTORISED ROLLING SHUTTER
APPROVAL	V.T.	08/10/2024	FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/24-25/00XX — REV-01
			SCALE: NTS — WT: — SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			If any queries contact : design@nihva.com