

Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges 100x75x3mm


(b) LOCK : Panic bar with external trim, mortise dead lock with half cylinder.

(c) DOOR CLOSER: F8500


(d) GLASS : 5mm Thk. Vision Glass of size 200x300mm.

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Soliid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

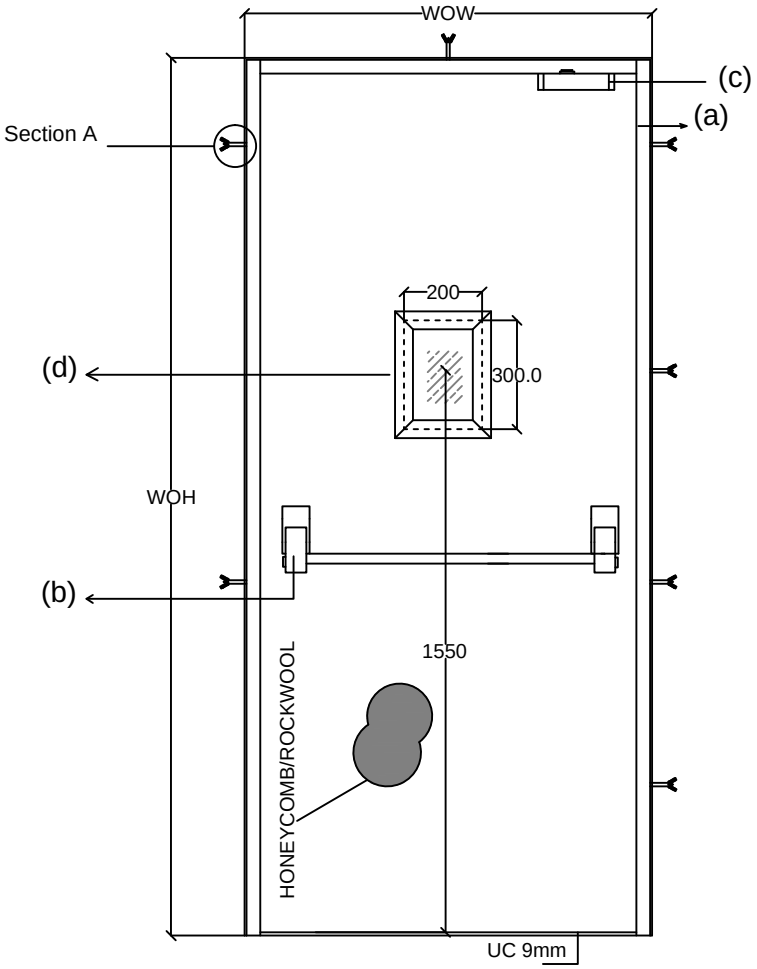


Inside Elevation

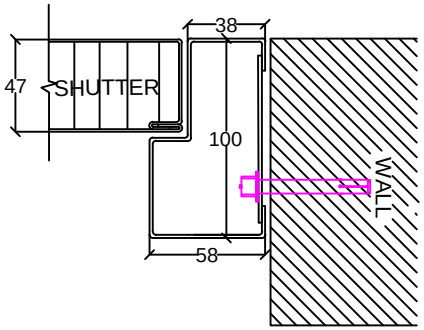

Detail view of Section A

FIRE RATED EXIT DOOR					
SR. NO.	WOW	WOH	TYPE 3	QUANTITY	LOCATION
1	960	2130	1	1	SHOP ENTRY

NOTE- 1.CLIENT SHOULD MENTION COLOR FOR DOOR.
2.CLIENT SHOULD CHECK DOOR ORIENTATION & APPROVE THE SAME.



Top View

COLOR
1.TRAFFIC WHITE (RAL 9016)
2.LIGHT GREY (RAL 7035)
3.GENTION BLUE (RAL 5010)
4.SIGNAL RED (RAL 3001)

This drawing & design is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

FIRE RATED EXIT DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	SURAJ	19/04/17	
CHECK	SAGAR P.	19/04/17	
REV.	00		
APPRD.	R.K.	19/04/17	
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - MUKUND CONSTRUCTION
PROJECT -
SITE -
DWG. NO. - NIHVA/17-18/0020/R01
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com