

HYD CYL - Ø50 (Bore) X 40(Rod)X 360 (Stroke length)
(Single Acting)

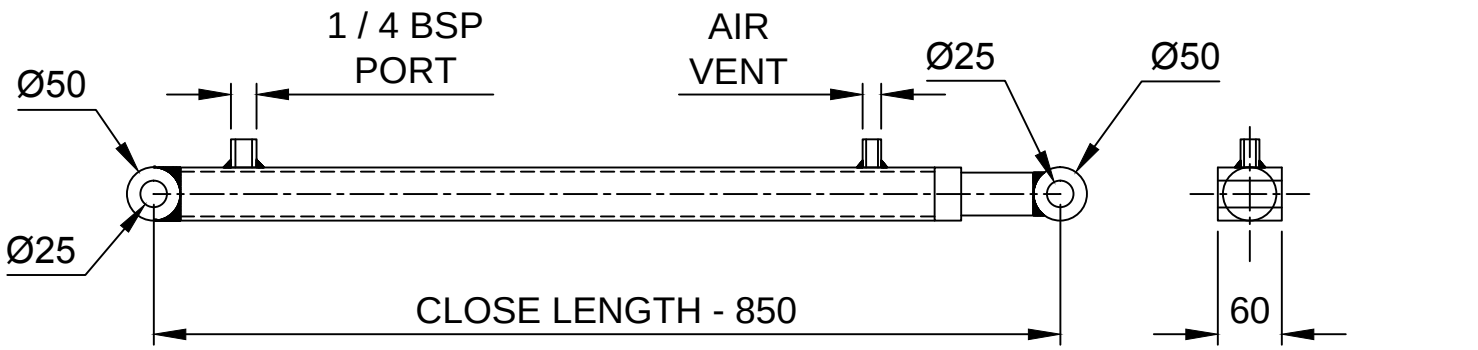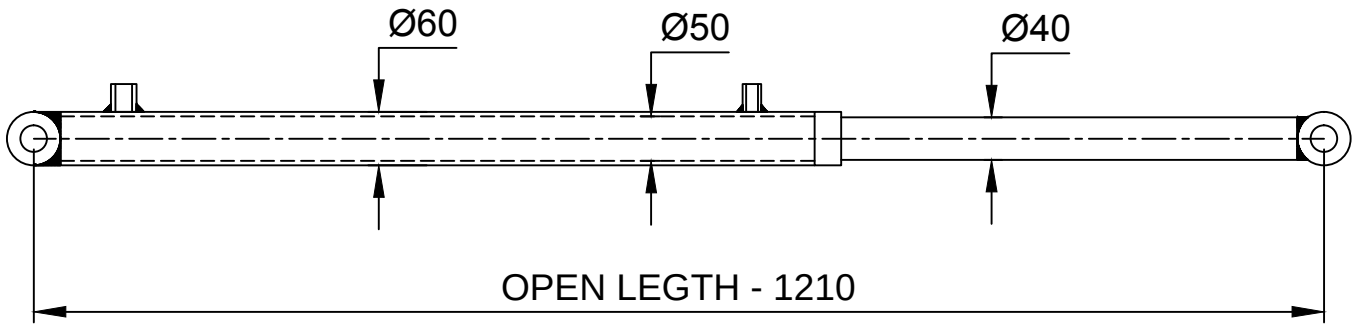


SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 360 mm
- PISTON ROD :-Ø40mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-1/4" BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 60'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 08 NOS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

| TITLE | | | | |
|---|---|---|---|---|
| DECK CYLINDER | | | | NIHVA TECHNOLOGIES PVT. LTD. |
| | NAME | SIGN | DATE | |
| DRAWN | P.V.A | | 01.04.2019 | CLIENT - |
| CHECK | V.M.T | | 01.04.2019 | PROJECT - |
| APPRD. | | | | SITE LOCATION - |
| If any queries contact : design@nihva.com | | | | DWG. NO. : NIHVA/18-19/VDR/434 REV- 0 |
| ALL DIMENSION ARE IN mm | | | | SCALE: NTS WT: SHEET: 01 OF 01 |

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com