Anritsu

JISL

SSV series
Checkweigher



JISL/IPS/YJ/AN-0146/2018-19
10.07.2018



To,
NIHVA Technologies Pvt. Ltd
Address: Plot No. 187,1st floor, G block,
Thermax Chowk,
Above Renault Showroom, MIDC,
Pimpri-Chinchwad,
Maharashtra 411019
Phone: 020 6630 4033

Kind Attn: Mr. Shailendra Saindane. (Mob: +91-9168423687)

Sub :- Anritsu, Japan make online CheckWeigher with Rejector

Dear Sir,
As per the discussion with the undersigned, please find enclosing herewith our best offer suitable for your requirement as below:

Product details -

Sl. No	Product Description	Dimension of Pouches	Throughput
1	Spices Powder 100 gms Pouch	195 mm L X 110 mm W X 15 mm H	160 PPM
2	Spices Powder 250 gms Pouch	264 mm L X 150 mm W X 25 mm H	90 PPM
3	Spices Powder 1000 gms Pouch	330 mm L X 190 mm W X 55 mm H	30~40 PPM

Jay Instruments and Systems Pvt. Ltd. takes great pleasure to introduce ourselves as sole representatives for **Anritsu Infivis Co. Ltd., Japan** for HACCP & GMP compatible Checkweigher, Metal Detector, X-Ray Inspection System.

We hope the enclosed offer is in line with your requirement and look forward for discussion at the earliest.

Thanking and assuring you of our best services all times.
Yours faithfully,
for **JAY INSTRUMENTS & SYSTEMS PVT. LTD.,**

Sudip Jahagirdar
Chief Manager – Sales
M: 09867582421
E: sudip.jahagirdar@jayinst.com

AmitKumar
Area Manager – Sales
M: 7718873474
E: manoj.chougule@jayinst.com

Anritsu

JISL

SMF

Improved Productivity


Anritsu proprietary technology

Smart Measurement Function minimizes double product errors by using multi-threaded filters, achieving high accuracy.



Point

Accurate weighing

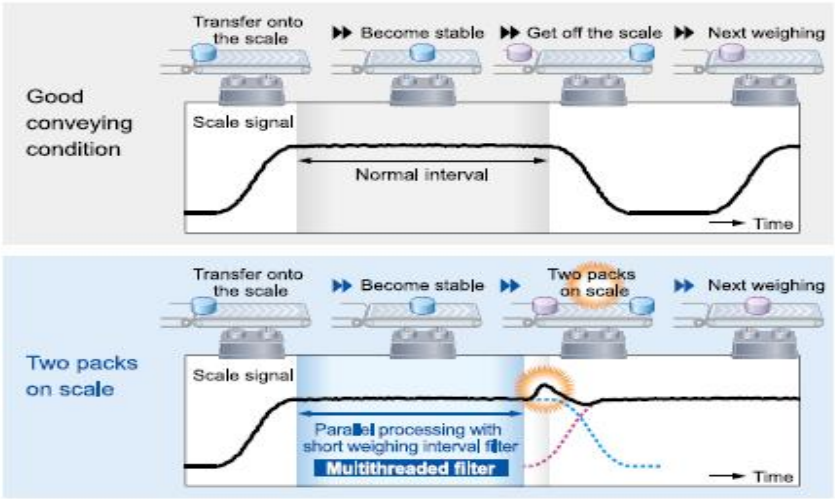

Conventional checkweighers use the weigh cell signal, after signal processing, to determine the weight of each product as it passes over the weigh table. If two packs are on the weigh table at the same time, a "double product error" will occur and the system is forced to reject both products since each individual product weight cannot be determined. Anritsu SSV series checkweigher advancements use innovative signal processing, multithreaded filtering, in conjunction with improved scale resolution to minimize "double product errors". This simultaneously minimizes unnecessary rejects and maximizes line productivity.



Example

Rejection down, yield up with SMF

High speed production line at 200 products/min

■ Conventional checkweigher

Product spacing is normally established by increasing the checkweigher conveyor speed, compared to the normal line speed, to prevent two products being on the weigh scale at the same time.



- Double products are all rejected, **Double products error rate is 0,15%**
- Due to increased conveyor speed, scale accuracy reduced to **0,75 g**

■ SSV checkweigher equipped with SMF

Product spacing and checkweigher conveyor speed is maintained. By running slower, the SSV system provides higher accuracy even if two products are on the weigh scale at the same time.



- Double products rejection is down, **Double products error rate is 0,03%**
- Scale accuracy is maintained to **0,35 g**

Improvement rate • Double products error rate: **0,12 %** • Scale accuracy: **0,4 g**

Effect on productivity

In case of the total production per year of 28,8 million products,

Calculated on 8 hours uptime per day,
25 days uptime per month, and uptime ratio of 100%.
200 p/min × 60 min/hour × 8 hour/day × 25 day/month × 12 month

- 28,8 million products × 0,12% = **34,560 products** / year
- With change of feeding amount due to increased accuracy: 28,8 million products × 0.4 g = **11,520 kg** / year

Note: This data was obtained with difficult products, unstable and having long settling times. Improvements will vary depending on packaging, product and SSV model.

Anritsu


JISL

Point **Smart Guide makes operation easy and avoids operator errors.**

- **Easy-to-follow instructions make each operation simple**



- **Outputs e-Daily Report**

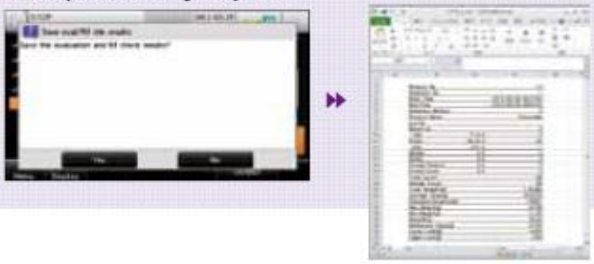

Output in CSV format.

Navigation and Supervision

For checkweighers to function properly, operation checking must be performed correctly at each stage of the daily operation: at start-up, during production, and at the end of production. These procedures, although necessary, are not always strictly followed due to the time and effort involved.

Smart Guide navigates operation check and maintenance procedures in an easy-to-understand format. Moreover, when a procedure was performed incorrectly, Smart Guide will not allow to proceed further, ensuring correct operation management.

E-Daily Report

All checkweigher weight data and operation check (audit) records are saved local on the SSV checkweigher, At the end of production, the data and operation check log can be sent via **E-Reports**. The elimination of manual data collection minimizes possible errors and makes data and log management simple and efficient.

Point

Product Registration Navigation simplifies parameter setting procedures with step-by-step illustrated instructions.



- **Product parameter setting**



- **Fine adjustment**



On-screen illustrations help you understand each key procedure and are listed in a "step-by-step" methodology. If performed improperly, the navigation stops for corrective action.



Operation Guidance

Operation Support

Easy to follow

Operator-oriented, easily navigated menu structure

Technical information – Anritsu Checkweigher


Working Principle :

Electromagnetic Balance (Force Balance)


A force is generated in an electromagnetic coil to balance the load caused by the product's weight. The current in the coil is measured and converted to the weight of the product.

- In the unloaded state, the balance rod is horizontal with the tip centralized at zero in the position sensor. When a product moves onto the weigh conveyor, the load is transferred through levers down onto one end of the rod forcing the other tip end to swing up. This upward movement of the tip is detected by the position sensor that activates the passage of current through the electromagnetic coil to force the rod tip back to the zero position. The amount of this balancing current is proportional to the weight of the product on the weigh conveyor and can be converted to the absolute weight.
- In addition to the basic characteristics of Electromagnetic Balances, Anritsu Electromagnetic Balances have high response speed and good resistance to floor vibration.


Diagram of Basic Principle

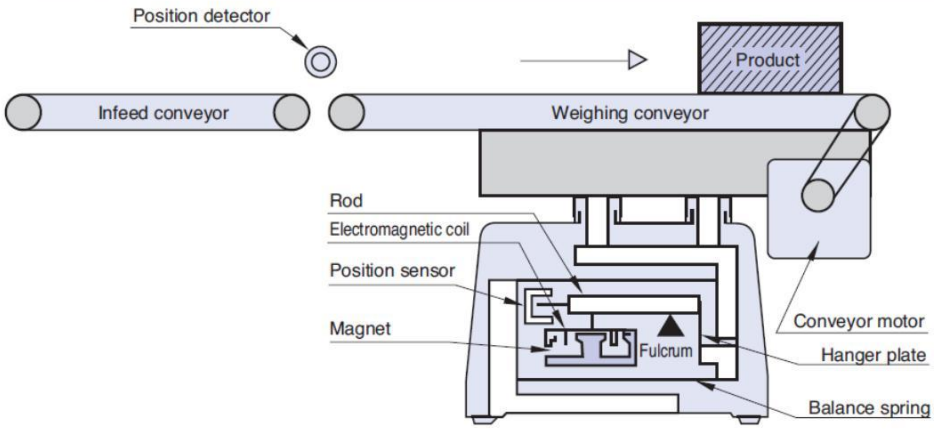

Safety and Reliability :
Anritsu Checkweigher complies with ISO & GMP to assure the safety & security of users as well as environment. All Checkweigher has received OIML-51 (International Recommendations for Legal Weighing Equipment) and European Type approval

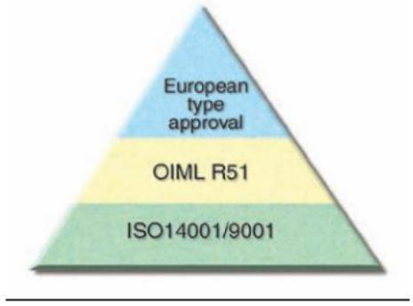

High Rigid Structure allowing stable & Precise weighing –
Our newly developed electromagnetic balance exclusive built-in DROP (Dynamic Responsiveness Optimization Process) filter have been combined to yield 1.5 time faster response time & 2 times higher accuracy.

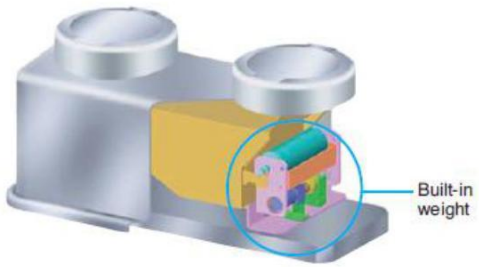

HACCP and GMP compliant structure prevents dust accumulation & improves cleaning efficiency –

1. Open frame for easy cleaning
2. Tool free removal & attachment
3. SUS304 frame for excellent sanitation compliance




The conveyor unit can be easily removed and attached from the motor, facilitating cleaning.

Control Panel – 8.5-inch color TFT LCD Touch screen display







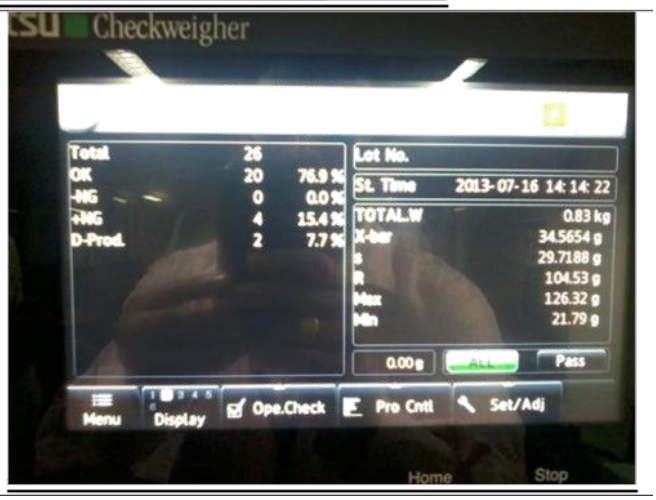

User Friendly controls –

8.5 inch color LCD touch screen interface – insures improved operability. Product registration can be set quickly and easily in two modes – Operator Mode & Manager Mode

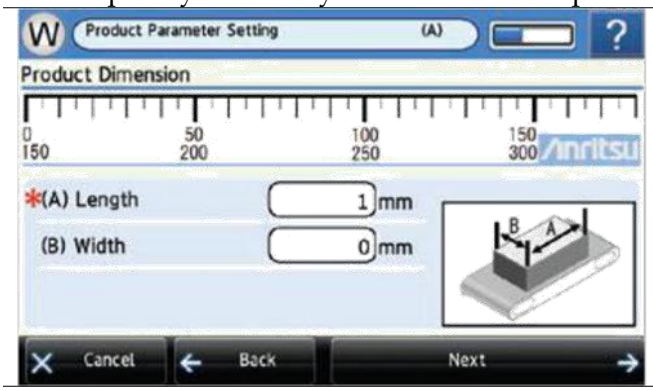

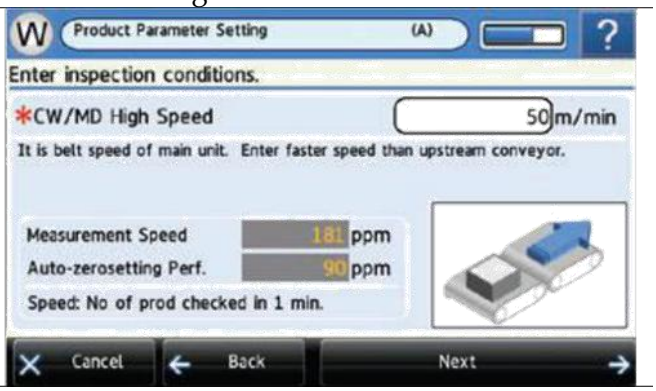

QUOTATION


No.	Description of Goods			Qty.
1.	Anritsu Make Checkweigher Model KWS5414BP12			01
	Weighing range	:	12 to 3000g	
	Scale interval	:	0.1g	
	Maximum Speed	:	220 products/min	
	Maximum accuracy	:	± 0.2 g (3 Sigma)	
	Display	:	8.5 inch color TFT LCD screen	
	Operation method	:	Touch Panel (start, stop and Home are direct push buttons)	
	Indication range	:	3009 g	
	Preset memory	:	Maximum 200	
	Classification	:	2 or 3	
	Product Size (mm) Width	:	20 to 250 mm	
	Length	:	60 to 450 mm	
	Height	:	5 to 450 mm	
	Belt Speed	:	15 to 120 m/min	
	Mass	:	67 kg	
	Power requirement	:	200 to 240 Vac +10% –15%, single phase, 50/60 Hz, 250 VA, rush current 20 A (typ.) (20 ms or less)	
	Environmental conditions	:	0° to 40° C (variation not to exceed 5°C/h to maintain accuracy), relative humidity 30% to 85%, non-condensing.	
	Protection Class	:	IP 30 compliance.	
	Exterior	:	Stainless steel (SUS304) (excluding some parts)	
	Data output	:	USB2.0, 10BASE-T/100BASE-TX Ethernet	
	Anritsu Make Flipper Rejector Model # KW4233BPBC			
	Gate drive system	:	Pneumatic drive	
	Classification	:	2 (Discharge to the right side of low direction)	
	Product size (mm)	:	250(W) x 300 (L) x 200 (H), 3 kg	
	Maximum Speed	:	140 products/min	
	Belt Speed	:	15 to 120 m/min	
	Air requirements	:	0.5 to 0.9 Mpa, 0.1 ℓ/min(A.N.R.)	
	Air supply inlet	:	Tube having outer dia of 6 mm	
	Power requirements	:	Supplied from checkweigher	
	Power Consumption	:	90 VA	
	Mass	:	34 kg	
	Environmental conditions	:	0° to 40°C, relative humidity 30% to 85%, non-condensing	
	Protection Class	:	IP 30 Compliance	
	Exterior	:	Stainless steel (SUS 304)	

Note :- Accuracy of Checkweigher depends on speed, weight, shape, type of product.

SCHEMATIC DIAGRAM:

External Dimensions


KWS5411BF11
KWS5411BP11
KWS5412BF12
KWS5412BP12
KWS5414BF12
KWS5414BP12

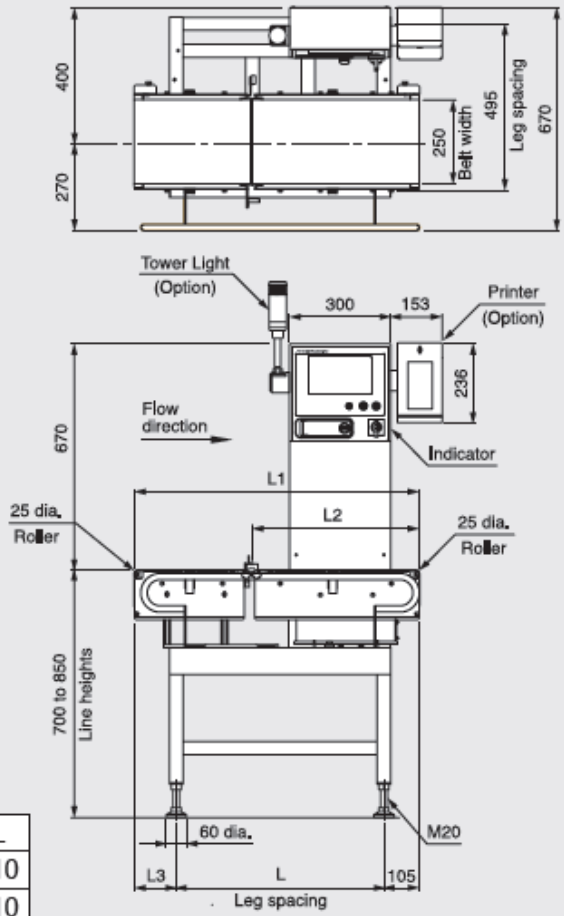

Model	L1	L2	L3	L
KWS5411	545	270	30	410
KWS5412	695	345	180	410
KWS5414	845	495	125	615

Units: mm

KW4233
type

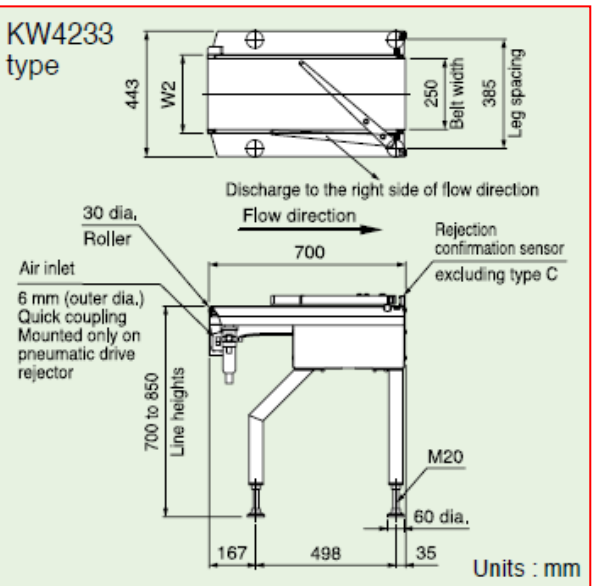

Units : mm

	Model	W2 (mm)
Maximum pass width	KW4233A◇B▼	280
	KW4233B◇B▼	265

Commercial Terms & Conditions

Sr. No.	Description	Qty	Unit Basic Price (JPY)	Total Basic Price (JPY)
1)	KWS5414BP12 Checkweigher	01	1,800,000	1,800,000
2)	KW4233BPBC Rejector	01	500,000	500,000
	Total Amount CIF by SEA (Nhava Sheva seaport)			2,300,000

Sr. No:	Description	Total Basic Price	Currency
1	KWS5414BP12 CHECKWEIGHER	1,800,000	JPY
2	KW4233BPBC REJECTOR	500,000	JPY
3	Wind Shield (Full-Acrylic)	Included	
4	Tower Lamp	Included	
5	Product Guide (Infeed)	Included	
7	Operational Manual (English) – 1 no.	Included	
8	USB Port facility	Included	
9	Sea-freight (Japan seaport ~ Nhava sheva seaport)	Included	
OPTIONALS: (order to be placed on Jay Instruments & Systems P Ltd., India). Local prevailing Taxes as applicable Extra.			
2	Rejection box with lock and key provision (By JISL – Locally manufactured)	45,000	INR
3	Low air pressure switch – 1 no. (By JISL – Locally)	12,000	INR

Product Name	Form/Contents/Product Temperature	Weight (g)	Width (W)/Length (L) /Height (H) (mm)	Speed
☑ Product A	Form: pouch,doypack / 3 way sealed bag Contents: ◉ Solid ○ Liquid ○ Powdery Product Temperature: ○ Under 0degree ○ 0 to 20 degrees ◉ 20 to 40 degrees ○ 40 to 60 degrees ○ 60 to 80 degrees ○ 80 degrees or more	100	W 110 L 195 H 15	130 pcs/min
☑ Product B	Form: pouch,doypack / 3 way sealed bag Contents: ◉ Solid ○ Liquid ○ Powdery Product Temperature: ○ Under 0degree ○ 0 to 20 degrees ◉ 20 to 40 degrees ○ 40 to 60 degrees ○ 60 to 80 degrees ○ 80 degrees or more	250	W 150 L 264 H 25	90 pcs/min
☑ Product C	Form: pouch,doypack / 3 way sealed bag Contents: ◉ Solid ○ Liquid ○ Powdery Product Temperature: ○ Under 0degree ○ 0 to 20 degrees ◉ 20 to 40 degrees ○ 40 to 60 degrees ○ 60 to 80 degrees ○ 80 degrees or more	1000	W 190 L 330 H 55	30 pcs/min

Main Unit Model Name	**KWS5414BP12**
RJ Model Name	**KW4233BPBC**

Product No.	Product name	Accuracy	Speed	Belt speed (Main unit)	Belt speed (RJ)	Note
1	Product A	3S=+/-0.73 to 1.45g	130pcs/min	70m/min	100m/min	Main: Zero-setting in every 15 min Main: Measurement time Ft= 225 ms Main: Speed = 131 pcs/min RJ: Speed = 130 pcs/min
2	Product B	3S=+/-0.60 to 1.20g	90pcs/min	49m/min	72m/min	Main: Zero-setting in every 15 min Main: Measurement time Ft= 256 ms Main: Speed = 92 pcs/min RJ: Speed = 91 pcs/min
3	Product C	3S=+/-0.34 to 0.68g	30pcs/min	17m/min	24m/min	Main: Zero-setting in every 15 min Main: Measurement time Ft= 553 ms Main: Speed = 32 pcs/min RJ: Speed = 31 pcs/min

Terms & Conditions

Prices	• CIF (Nhava sheva seaport) BY SEA.
Taxes & Duties	• Not included customs duty and other taxes to be arranged by Customer
Payment	• 100% Confirmed Irrevocable Letter of Credit at Sight to be opened or 100% T/T Advance Remittance to be Sent in favour of Anritsu Infivis Co.,Ltd., Japan. • **Any delays in establishing this confirmed documentary letter of credit may cause delay in proposed shipping date.**
Delivery	• Shipment off JAPAN port will be approximately 10 weeks after receipt of Letter of Credit and finalization of machine specifications in full details unless otherwise specified. • Any delays in establishing this confirmed documentary letter of credit may cause delay in proposed shipping date. • Transit time 4 weeks extra by sea
Packing	• Export standard packing for container shipment
Contract Variation	• If the Buyer requires any variation to the Contract after we have sent our written acceptance, and we agree to the variation, we will provide a quotation for the variation and will require the buyer to agree in writing to the additional price.
Validity	• 60 days from the date of our offer after which time they may be subject to review.
Warranty	• The goods offered are guaranteed for 12 months from the date of dispatch against manufacturing defects. During the warranty period, Anritsu shall provide spare parts free of charge. However, customs duties, freight, clearing cost for any such spares will be borne by the customer. JISL will provide on –site repair services free of charge during the warranty period.

INSTALLATION

Installation & after sales Support	• To assist further, we also offer the services of our trained engineers to inspect and commission the equipment. Our engineer will also be available for training your staff in all aspects of operation, cleaning and routine maintenance. • Installation Charges lumsum of Rs. 35,000/- person for 2 days payable before installation alongwith Work order (Service tax applicable). • The above charge is consisting of : **a) To & Fro Charges** **b) Local Ground Transport** **c) Hotel Accommodation Fees** **d) Supervision & Installation Fees** • In case that the site are found to be not ready for installation after our engineer reaches the site and is required to spend more than 1 days, the extra charge shall be applicable: **a) Local Ground Transport** **b) Hotel Accommodation Fees** **c) Extra Engineer Fees Rs 7,000 per 10 hours day / per person to be charged onto your account.**
Installation Environment & Conditions	(1) Installation Site: Inside fine constructed building structure (2) Temperature: Within 0°C – 40°C (3) Humidity: Within 30-85% without any condensation (4)Installation Space: There should be a working space around the equipment for maintenance and (6)Static Electricity: Make sure to install the parts appropriately in order to avoid unearthed metal pieces. (7)Radio Interference: Please refrain from placing the equipment close to radio equipment or source of radio interference. Please refrain from sharing the power source with equipment that may emit noises.

Kindly type your order in the name of:

ANRITSU INFIVIS CO., LTD.
5-1-1, ONNA, ATSUGI
KANAGAWA 243 –0032, JAPAN.

And fax to us.
Thanking you,
For **JAY INSTRUMENTS & SYSTEMS PVT. LTD.**

Sudip Jahagirdar
Chief Manager – Sales
M: 09867582421
E: sudip.jahagirdar@jayinst.com

AmitKumar
Area Manager – Sales
M: 7718873474
E: manoj.chougule@jayinst.com