ASSA ABLOY
Docking systems

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in
door opening solutions






1
2

One partner for all your needs





Smoothly functioning entrances are a prerequisite for any successful business. So are smoothly functioning relationships. The combined products, solutions and knowledge of ASSA ABLOY Entrance Systems create a strong partner for every aspect of entrance automation.

ASSA ABLOY Entrance Systems is the world's most complete supplier of entrance automation solutions. With a holistic approach to the flow of people, goods and vehicles, we create solutions with the best possible balance of cost, quality and lifetime performance.

Today we have gathered a strong portfolio of global product brands under a single roof, preserving the wealth of expertise of each.

Besam, Crawford, Megadoor and Albany are product brands that are market leaders in their fields since decades, and have a strong history of proven solutions and extraordinary service know-how.

Our solutions form a total offering for the front, back and interior of your building. Our combined approach means we understand the full range of challenges you face, and allows us to provide the best solution for your total entrance needs.


ASSA ABLOY Entrance Systems is a division within ASSA ABLOY, the global leader in door opening solutions.

Dock leveler
Crawford DL6010S

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions

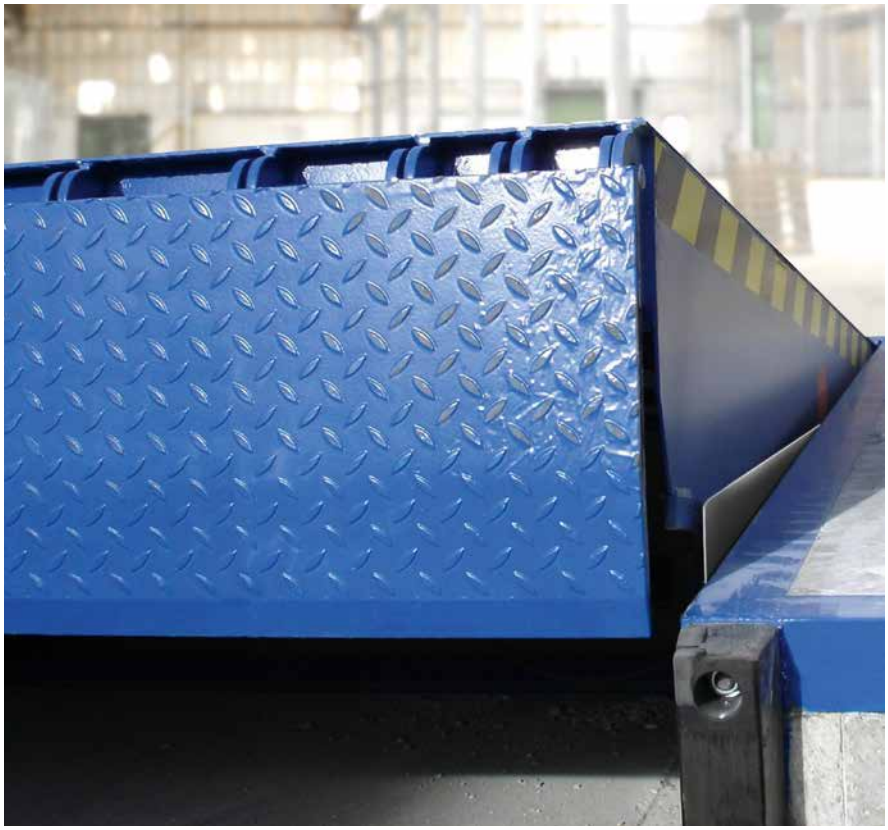

Swing lip dock leveler for general applications

The Crawford DL6010S Swingdock is the standard solution in general industry applications which is easy to operate. The swing lip of the Crawford DL6010S Swingdock safely bridges the gap between the ramp and the vehicle bed.

To enable a safe and efficient process for loading and unloading, the Crawford DL6010S Swingdock connects the building with the vehicle. The result is highest safety for the transfer of goods, avoiding injuries to the personal or damages to the equipment.

The Crawford DL6010S Swingdock:
- Preventive maintenance is easy and fast to secure functionality and avoid downtimes.
- Bent swing lip prevents material handling equipment from "grounding out".
- Swing lip with open hinges to avoid blockage of swinging out movement, free of cleaning, and very easy to maintain.
- Very robust Swing lip support with burned plates. All impact forces are absorbed in optimal way avoiding damages and providing long life time.


ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.

ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world's first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Nominal length	2000, 2250, 2500, 2770, 3000, 3500, 4000, 4500 mm
Nominal width	1750, 2000, 2200 mm
Load capacity	60 kN (6 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 520 mm down to 350 mm
Platform tear-plate thickness	6/8 mm - 8/10 mm
Max. point load leveler platform 6 mm tear plate 8 mm tear plate	 1,3 N / mm² 6,5 N / mm²
Lip material & length	steel, 400 / 500 mm
Control unit protection class	IP 54
Temperature range hydraulic oil	-20°C - +60°C
Magnetic valves	24 V / DC 18W S1
Nominal voltage	400V 3-phase
Nominal motor power	0,75 kW
European standard	EN 1398 Dock levelers

Dimensions

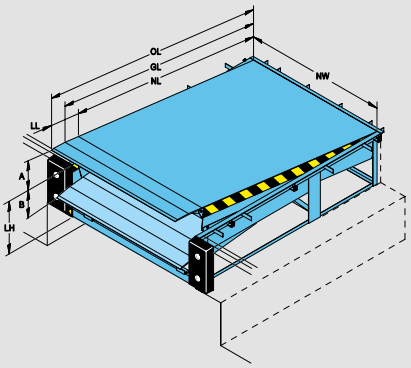


NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LL	Lip length
LH	Leveler height
A	Working range above dock level
B	Working range below dock level

Dimensions				Vertical working range			
				LL 400		LL 500	
NL	OL	GL	LH	A	B	A	B
2000	NL+330	NL+190	600	260	280	-	-
	NL+330	NL+190	700	290	330	180	360
2250	NL+330	NL+190	600	290	275	-	-
	NL+330	NL+190	700	300	345	180	380
2500	NL+330	NL+190	600	310	270	-	-
	NL+330	NL+190	700	390	340	270	360
2770	NL+330	NL+190	600	335	270	-	-
	NL+330	NL+190	700	400	340	290	360
3000	NL+330	NL+190	600	340	265	-	-
	NL+330	NL+190	700	400	335	280	290
3500	NL+330	NL+190	800	495	335	390	345
4000	NL+330	NL+190	900	540	335	430	345
4500	NL+330	NL+190	900	590	335	480	345

Nominal width 1750, 2000, 2200

Electrical preparations

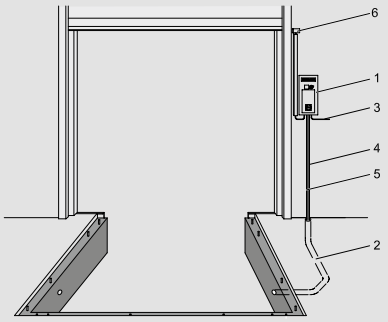


1	Control unit (included in the delivery)	
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 0,75 kW
4	Cable:	7 x 0,75 mm²
5	Motor cable:	4 x 1,5 mm²
6	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for swing lip levelers



ASSA ABLOY DE6090DI Dock-IN

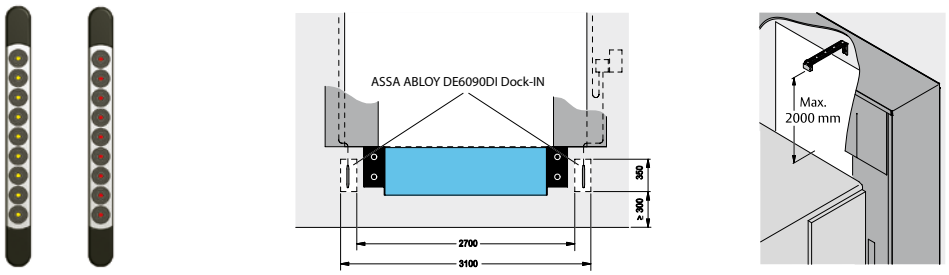

Standard available colours

Red
RAL 3002

Green
RAL 6005

Blue
RAL 5010

Jet Black
RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.


ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler
Crawford DL6010SA

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions

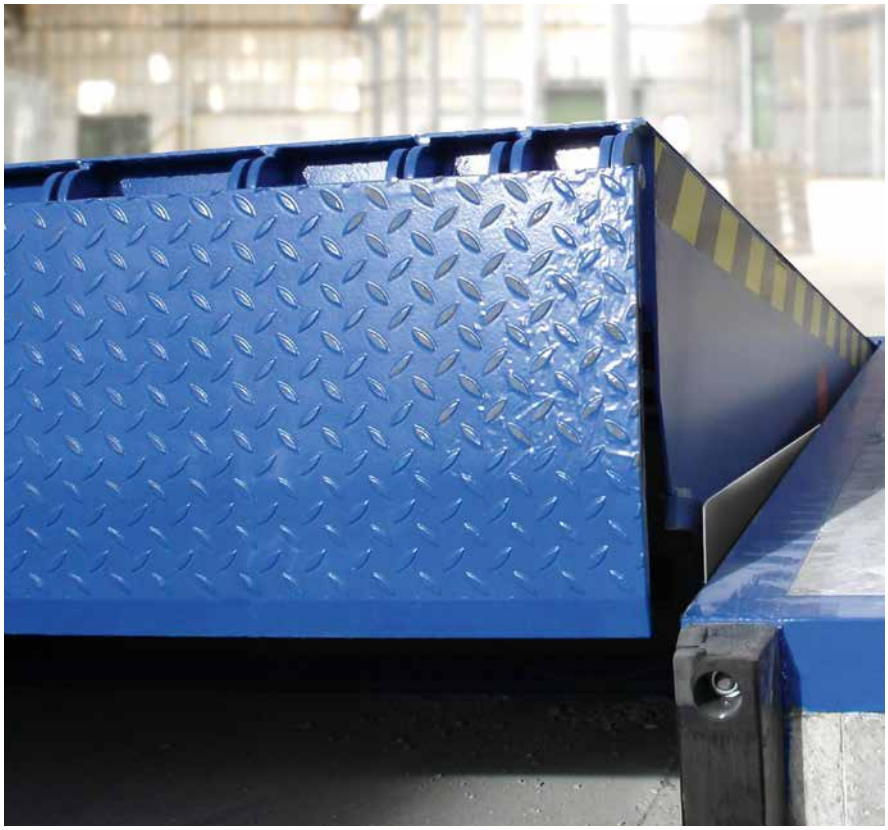

Swing lip dock leveler with self supporting frame

The Crawford DL6010SA Swingdock Autodock has a self supporting frame for easy integration with a building. It is the base of a complete Load house outside the building containing all relevant components, leveler, shelter and door to make it a total docking solution.

To enable a safe and efficient process for loading and unloading, the Crawford DL6010SA Swingdock Autodock connects the building with the vehicle. The result is highest safety for the transfer of goods, avoiding injuries to the personal or damages to the equipment.

The Crawford DL6010SA Swingdock Autodock:
- Preventive maintenance is easy and fast to secure functionality and avoid downtimes.
- Bent swing lip prevents material handling equipment from "grounding out".
- Swing lip with open hinges to avoid blockage of swinging out movement, free of cleaning, and very easy to maintain.
- Very robust Swing lip support with burned plates. All impact forces are absorbed in optimal way avoiding damages and providing long life time.

ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.


ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world's first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Nominal length[1]	2000, 2450, 3000 mm
Nominal width AD	3300, 3500, 3600, 3750 mm
Leveler width	2000, 2200 mm
Load capacity	60 kN (6 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 430 mm down to 360 mm
Platform tear-plate thickness	6/8 mm - 8/10 mm
Max. point load leveler platform	1,3 N / mm² (6 mm tear plate) 6,5 N / mm² (8 mm tear plate)
Lip material & length	steel, 400 / 500 mm
Control unit protection class	IP 54
Nominal voltage	400V 3-phase, 230V 3-phase
Nominal motor power	0,75 kW
European standard	EN 1398 Dock levelers

1) Other sizes on request

Dimensions

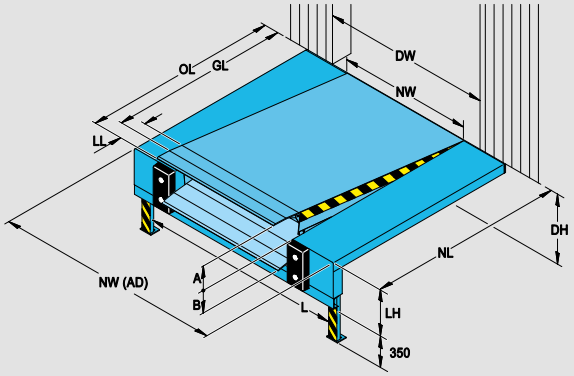


Dimensions				Vertical working range			
				LL 400		LL 500	
NL	OL	GL	LH	A	B	A	B
2000	NL+350	NL+210	700	290	330	180	360
2450	NL+335	NL+195	700	380	340	260	360
3000	NL+350	NL+210	700	400	335	280	290

Nominal width 2000, 2200
Nominal width (AD) 3300, 3500, 3600, 3750

NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LL	Leveler length
LH	Leveler height
A	Working range above dock level
B	Working range below dock level
DH	Dock height
DW	Door width
NW (AD)	Nominal width Autodock (incl. side tread panels)
L	Distance between plinths
OW (AD)	Overall width Autodock = NW (AD) - 20

Electrical preparations

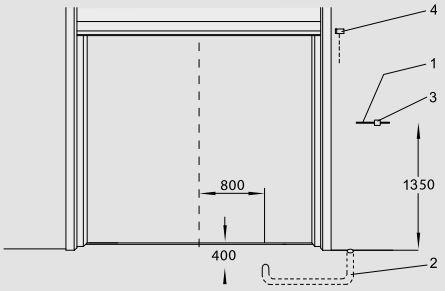


1	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 0,75 kW
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains isolator*:	Only for control box with emergency stop
4	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for swing lip levelers



ASSA ABLOY DE6090DI Dock-IN

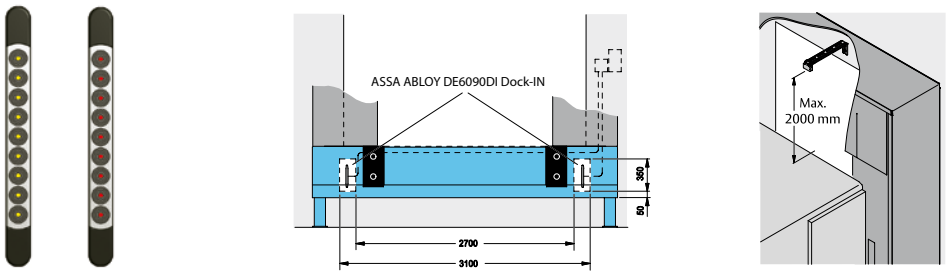

Standard available colours

Red
RAL 3002

Green
RAL 6005

Hot dip galvanised

Blue
RAL 5010

Jet Black
RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler
Crawford DL6010SM

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Economical manually operated dock leveler

The Crawford DL6010SM Minidock is a manually operated dock leveler, specifically developed for operators of fleets of standardized vehicles with the same bed height.

The Crawford DL6010SM Minidock is developed to be an easy to operate and economical solution in environments where standardized vehicles with the same bed height is used.

The Crawford DL6010SM Minidock is equipped with a gas spring, making it easy for one person to operate – just lift and swing the platform. The Crawford DL6010SM Minidock also meets the demands of most loading operations and fulfils all ergonomic requirements.

Adapts to movements of vehicle bed
The Crawford DL6010SM Minidock design includes a limited, free-floating function, allowing the platform to adapt to the vertical movements of a vehicle bed during loading and unloading.


Lip provides a smooth passage
The lip of the Minidock is made of steel. The shape of the lip is extremely flat and the design of the rear connection to the dock edge is bump-free, resulting in a smooth passage between building and truck bed.

Complete docking solution by Crawford
The Crawford DL6010SM Minidock can be complemented with a dock shelter to get the advantages of a complete docking system. Such solution improves the loading/unloading process and hence the working environment.

Technical Data

Handling rod for manual operation supported by a gas spring device	
Nominal length	700 mm
Nominal width	1250, 2000, 2200 mm
Load capacity	40 kN (4 tonnes) 60 kN (6 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 100 mm down to 100 mm
Platform tear-plate thickness	4/6 mm
Lip material	steel
Installation model	ramp, pit
Rubber buffers	RB 250x250x90 RB 500x250x90
European standard	EN 1398 Dock levelers


Dimensions

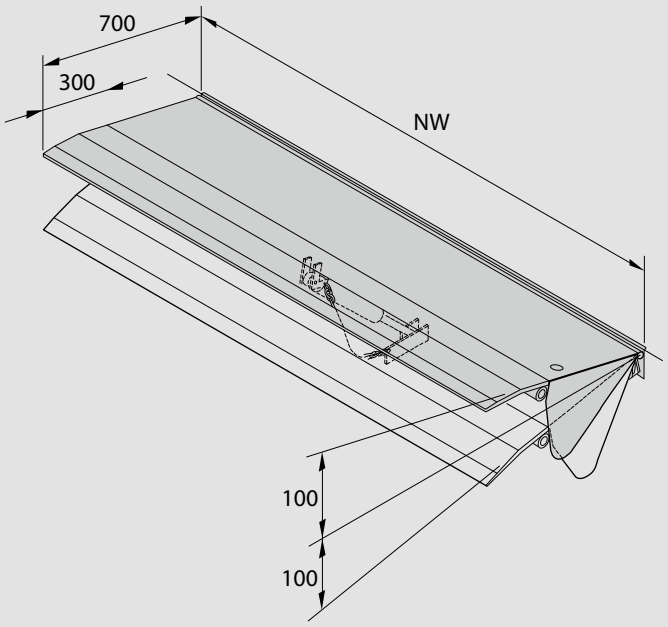

Nominal width (NW)	1250 mm (40 kN) 2000 mm (40 kN, 60 kN) 2200 mm (40 kN, 60 kN)
Nominal length	700 mm
Length of swing lip	300 mm
Vertical working range	100 mm


Installation modes / buffer options

Ramp installation

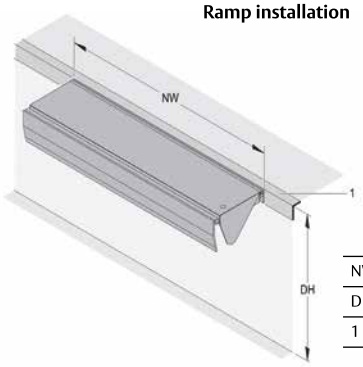


NW	Nominal width
DH	Dock height
1	Angle (by others)

Pit drawing 5143.0206	without tail lift recess
Pit drawing 5143.0243	with tail lift recess



H x W x D = 500 x 265 x 555


1 steel support construction
2 buffer 250 x 250 x 90




H x W x D = 500 x 265 x 555

1 steel support construction
2 buffer 500 x 250 x 90


Pit installation

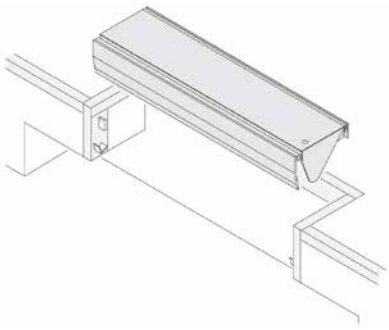



H x W x D = 250 x 250 x 90

1 buffer 250 x 250 x 90



H x W x D = 500 x 250 x 90

1 buffer 500 x 250 x 90

Standard available colours

Red RAL 3002	Green RAL 6005
Blue RAL 5010	Jet Black RAL 9005
Hot dip galvanised	

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.


ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler
Crawford DL6010SR

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions

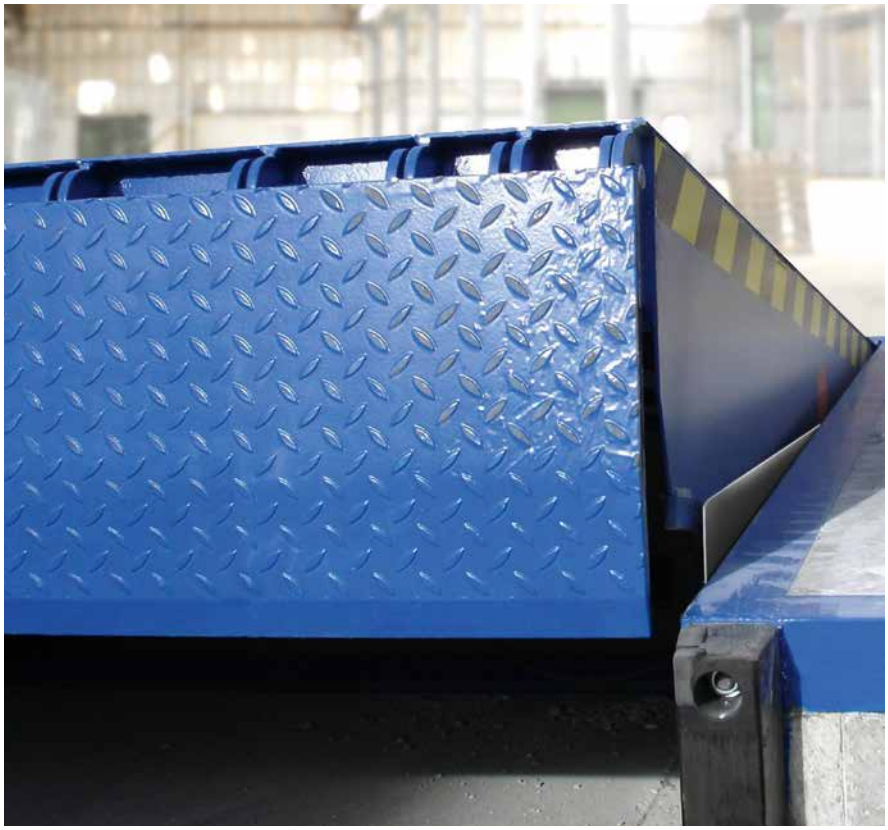

The dock leveler upgrade solution - for replacement of existing levelers

A Crawford DL6010SR Swingdock Replacement is a cost-effective upgrade solution to replace obsolete dock levelers. The wide sizes range and the variety of frame designs make it possible to replace existing levelers without any reconstruction. Your expert from Crawford will do the visual inspection and find the best solution for your individual situation.

The Crawford DL6010SR Swingdock Replacement:
- Preventive maintenance is easy and fast to secure functionality and avoid downtimes.
- Bent swing lip prevents material handling equipment from "grounding out".
- Swing lip with open hinges to avoid blockage of swinging out movement, free of cleaning, and very easy to maintain.
- Very robust Swing lip support with burned plates. All impact forces are absorbed in optimal way avoiding damages and providing long life time.


ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.

ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world's first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Sizes – pit length	1765 mm – 3050 mm
Sizes – nominal length	1750 mm – 3000 mm
Sizes – pit width	1730 mm – 2310 mm
Sizes – nominal width	1700 mm – 2250 mm
Leveler height	600, 700 mm
Load capacity	60 kN (6 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 400 mm down to 340 mm
Platform tear-plate thickness	6/8 mm - 8/10 mm
Max. point load leveler platform	1,3 N / mm² (6 mm tear plate) 6,5 N / mm² (8 mm tear plate)
Lip material & length	steel, 400 / 500 mm
Control unit protection class	IP 54
Nominal voltage	400V 3-phase, 230V 3-phase
Nominal motor power	0,75 kW
European standard	EN 1398 Dock levelers


Dimensions

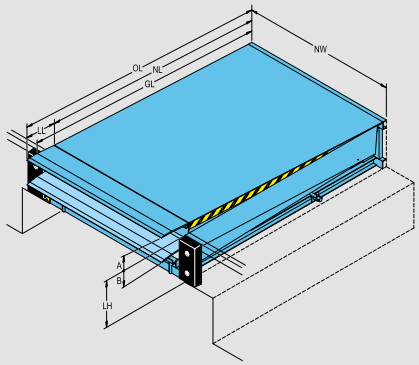

NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LE	Leveler extension
LH	Leveler height
A	Working range above dock level
B	Working range below dock level
DH	Dock height
DW	Door width

Sizes – pit length	1765 mm – 3050 mm
Sizes – nominal length	1750 mm – 3000 mm
Sizes – pit width	1730 mm – 2310 mm
Sizes – nominal width	1700 mm – 2250 mm
Leveler height	600, 700 mm
Vertical working range Rise above dock Fall below dock	 up to 400 mm down to 340 mm

Electrical preparations

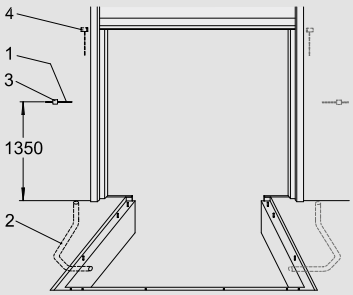


1	Mains supply: Mains fuse: Motor power: Cable: Motor cable:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 0,75 kW 7 x 0,75 mm² 4 x 1,5 mm²
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains isolator*:	Only for control box with emergency stop
4	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for swing lip levelers



ASSA ABLOY DE6090DI Dock-IN

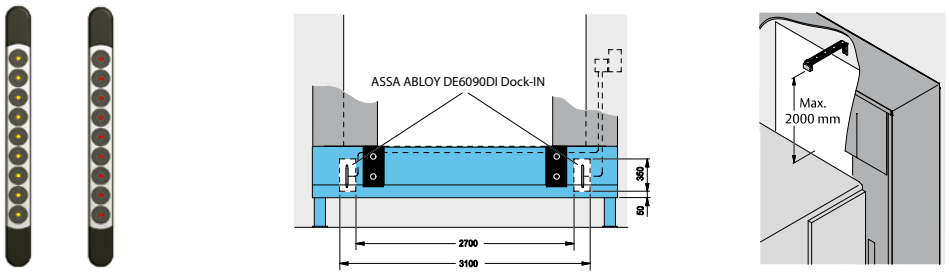

Standard available colours

Red
RAL 3002

Green
RAL 6005

Hot dip galvanised

Blue
RAL 5010

Jet Black
RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler

Crawford DL6020STA

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



The efficient and safe docking process

The Crawford DL6020STA Stepdock Autodock is a dock leveler that provides increased efficiency and safety for the docking process. It has a telescopic lip and self supporting frame for easy integration with a building. It is the base of a complete Load house outside the building. The operation is based on the proven telescopic lip technology which is the universal and most flexible docking system. The Crawford DL6020STA Stepdock Autodock provides other advantages than a standard telescopic lip leveler.

The design was specifically developed to let a truck dock to the loading bay with closed rear doors. First the truck is put in the right position and then preferably an inflatable dock shelter seals off the loading bay before the sectional door is opened. The last step of the complete dock-in procedure is that the rear doors of the truck are opened. This sequence “dock first – open the rear doors later” provides a number of benefits: saving of energy, improving working conditions in particular for the truck driver, increasing safety of people / goods, and improving the efficiency of the docking process.

Ideal solution for various applications

- Hygienic transport with high focus on safety.
- Food logistic demanding the unbroken cold chain.
- Container transport with customs purposes.
- High attention on theft prevention.

ASSA ABLOY 950 series - the intelligent, all in one, docking control system


The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit.
With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.


Technical Data

Nominal length[1]	2450 mm
Nominal width	3300, 3500, 3600, 3750 mm
Load capacity	60 kN (6 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 220 mm down to 620 mm
Platform tear-plate thickness	8/10 mm
Max. point load leveler platform	6,5 N / mm² (8 mm tear plate)
Lip Type and Length	telescopic, 500 mm ergonomic lip, 345 mm
Lip Material	steel or aluminium
Control unit protection class	IP 54
Temperature range hydraulic oil	-20°C - +60°C
European standard	EN 1398 Dock levelers

1) Other sizes on request

Dimensions

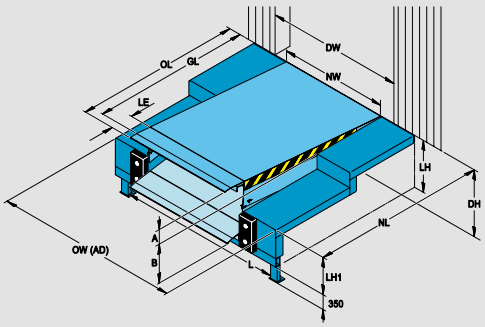

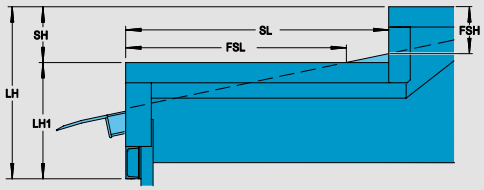


SH	Step height (250 mm)
SL	Step lenght (1300 mm)
FSH	Free Step height
FSL	Free Step lenght

Dimensions		Vertical working range				Step	
		LE 500		LE 345			
NL	LH / LH1	A	B	A	B	FSL	FSH
2000	850 / 600	220	620	210	600	1140	225

NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width (2000 mm)
LE	Lip extension
LH / LH1	Leveler heightback / front
A	Working range above dock level
B	Working range below dock level
DH	Dock height
DW	Door width
NW (AD)	Norminal width Autodock (incl. side tread panels)
L	Distance between plinths
OW (AD)	Overall width Autodock = NW (AD) -20

Electrical preparations

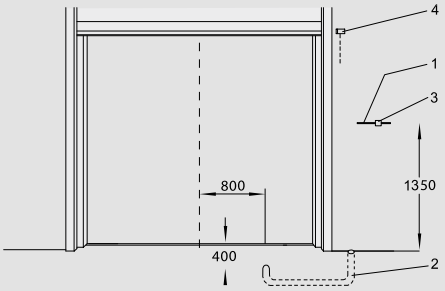

1	Control unit (included in the delivery)	
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 1,5 kW
4	Cable:	7 x 0,75 mm²
5	Motor cable:	4 x 1,5 mm²
6	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for Tele lip levelers



Standard available colours

Red RAL 3002

Green RAL 6005

Hot dip galvanised

Blue RAL 5010

Jet Black RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler

Crawford DL6020T

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Telescopic lip dock leveler for general applications

The Crawford DL6020T Teledock, i.e. the dock leveler with a telescopic lip, is the universal and most flexible docking system. It is suitable for every loading situation - regardless if its complexity. The main advantage compared to other levelers is the movable telescopic lip which can be precisely positioned on the vehicle bed, thus giving optimal load utilisation of the whole vehicle bed area.

The Crawford DL6020T Teledock:
- Telescopic lip giving optimal load utilization of the whole vehicle bed area.
- Easy and comfortable operation.

The option Ergonomic Lip:
- Absolute bump free transition from the leveler platform to the lip.
- Especially designed for operations with typical electric pallet trucks without spring bumpers.


ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.

ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world's first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Nominal length	2000, 2500, 3000, 3500, 4000, 4500 mm
Nominal width	1750, 2000, 2200, 2250 mm
Load capacity	60 kN (6 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 660 mm down to 440 mm
Platform tear-plate thickness	8/10 mm
Max. point load leveler platform	6,5 N / mm² (8 mm tear plate)
Lip type and length	telescopic, 500/1000 mm ergonomic lip, 345 mm
Lip material	steel or aluminium
Lip option	tapered lip / Retracting tongues
Control unit protection class	IP 54
Temperature range hydraulic oil	-20°C - +60°C
European standard	EN 1398 Dock levelers

Dimensions

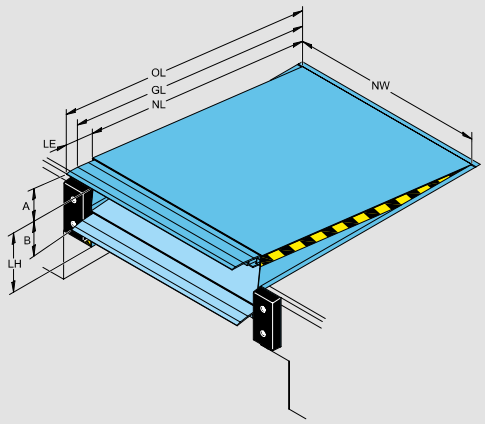


NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LE	Lip extension
LH	Leveler height
A	Working range above dock level
B	Working range below dock level

Dimensions		Vertical working range					
		60 kN					
		LE 500		LE 1000		LE 345	
NL	LH	A	B	A	B	A	B
2000	600	310	310	380	370	270	280
	700	340	400	420	470	310	360
2500	600	420	260	500	290	380	225
	700	430	370	510	420	400	340
3000	600	370	230	430	250	350	210
	800	450	400	520	440	420	360
3500	800	520	400	600	440	490	360
4000	900	590	400	660	440	560	380
4500	900	570	410	640	440	550	380

Nominal width (NW) 1750, 2000, 2200, 2250 for all sizes

Electrical preparations

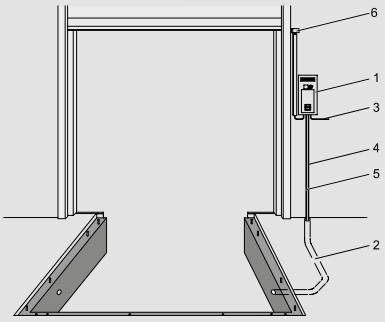


1	Control unit (included in the delivery)	
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 1,5 kW
4	Cable:	7 x 0,75 mm²
5	Motor cable:	4 x 1,5 mm²
6	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for Tele lip levelers



ASSA ABLOY DE6090DI Dock-IN

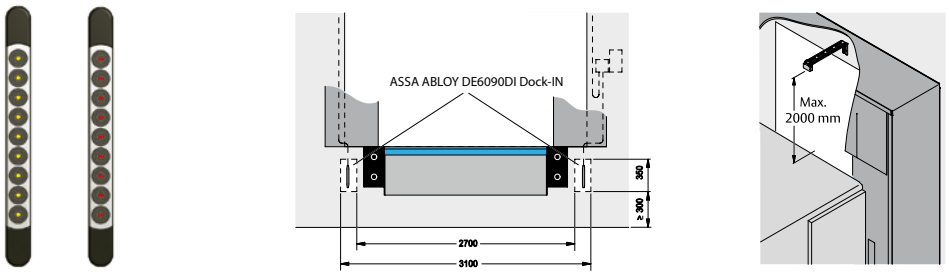

Standard available colours

Red RAL 3002	Green RAL 6005
Blue RAL 5010	Jet Black RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler
Crawford DL6020TA

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Telescopic lip dock leveler with self supporting frame

The Crawford DL6020TA Teledock Autodock has a telescopic lip and self supporting frame for easy integration with a building. It is the base of a complete Load house outside the building containing all relevant components, leveler, shelter and door to make it a total docking solution. The Crawford DL6020TA Teledock Autodock is suitable for every loading situation – regardless of its complexity. The main advantage compared to other levelers is the movable telescopic lip which can be precisely positioned on the vehicle bed, thus giving optimal load utilisation of the whole vehicle bed area.

The Crawford DL6020TA Teledock Autodock:
- Telescopic lip giving optimal load utilization of the whole vehicle bed area.
- Easy and comfortable operation.

The option Ergonomic Lip:
- Absolute bump free transition from the leveler platform to the lip.
- Especially designed for operations with typical electric pallet trucks without spring bumpers.

ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.


ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world's first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Nominal length[1]	2000, 2450, 3000 mm
Nominal width AD	3300, 3500, 3600, 3750 mm
Leveler width	2000, 2200 mm
Load capacity	60 kN (6 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 520 mm down to 470 mm
Platform tear-plate thickness	8/10 mm
Max. point load leveler platform	6,5 N / mm² (8 mm tear plate)
Lip type and length	Telescopic, 500/1000 mm ergonomic lip, 345 mm
Lip material	steel or aluminium
Control unit protection class	IP 54
Temp. range hydraulic oil	-20°C - +60°C
European standard	EN 1398 Dock levelers

1) Other sizes on request

Dimensions

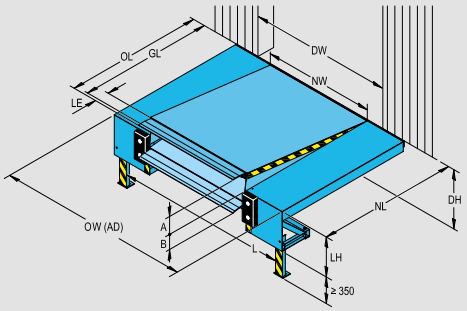


Dimensions		Vertical working range					
		60 kN					
		LE 500		LE 1000		LE 345	
NL	LH	A	B	A	B	A	B
2000	600	310	310	380	370	270	280
	700	340	400	420	470	310	360
2450	600	390	250	470	290	360	225
	700	430	370	520	420	400	340
3000	600	370	230	430	250	350	210
	800	450	400	520	450	420	360

Nominal width NW 2000, 2200
Nominal width NW (AD) 3300, 3500, 3600, 3750

NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LE	Leveler extension
LH	Leveler height
A	Working range above dock level
B	Working range below dock level
DH	Dock height
DW	Door width
NW (AD)	Nominal width Autodock (incl. side tread panels)
L	Distance between plinths
OW (AD)	Overall width Autodock = NW (AD) - 20

Electrical preparations

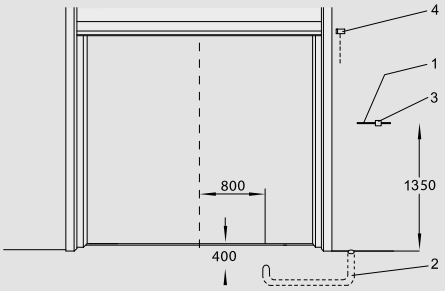


1	Conduit for wiring internal diameter 70, angles <45° (by others)	
2	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 1,5 kW
3	Mains isolator*:	Only for control box with emergency stop
4	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for Tele lip levelers



ASSA ABLOY DE6090DI Dock-IN

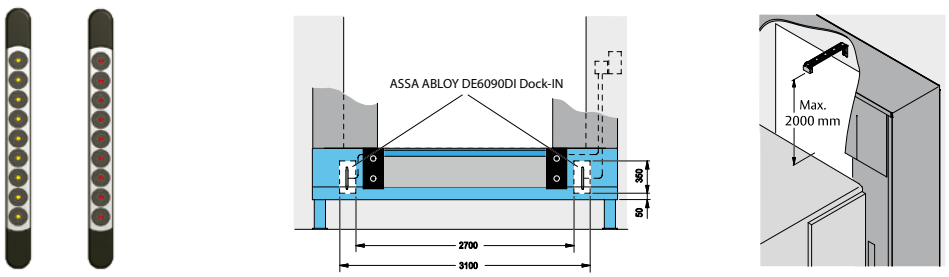

Standard available colours

Red
RAL 3002

Green
RAL 6005

Hot dip galvanised

Blue
RAL 5010

Jet Black
RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler

Crawford DL6020TI

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Energy saving telescopic lip dock leveler for cold storage facilities

Unbroken temperature chains in storage, loading and transportation are vital. In addition, big temperature differences between the inside and outside of a cold storage facility might create costly energy losses during loading and unloading. The Crawford DL6020TI Teledock Isodock has been designed to cope with such demands. Studies made by the Institute of Thermodynamics at Hanover University show that, compared to conventional docking systems, energy savings of up to 75 percent are created.

Unlike conventional docking systems, the Crawford DL6020TI Teledock Isodock leveler is placed behind a well insulated sectional door. In closed position it is very well sealed off from below, preventing cold or hot air access.

Besides that, the Crawford DL6020TI Teledock Isodock is designed in such a way that impact forces from docking vehicles are absorbed by the building floor. The frost-proof foundation is separated from the building floor just by a gap for housing the sectional door – not as a separate building construction. Complicated building arrange-ments can be avoided.


ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.

ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world's first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Nominal length	2000, 2500, 3000 mm
Nominal width	2000, 2200 mm
Load capacity	60 kN (6 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 520 mm down to 460 mm
Platform tear-plate thickness	8/10 mm
Max. point load leveler platform	6,5 N / mm² (8 mm tear plate)
Insulation thickness	40 mm
Lip material & length	steel or aluminium, 1000 mm
Lip option	tapered lip / Retracting tongues
Control unit protection class	IP 54
Temperature range hydraulic oil	-20°C - +60°C
Magnetic valves	24 V / DC 18W S1
Nominal voltage	400V 3-phase
Nominal motor power	1,5 kW
European standard	EN 1398 Dock levelers

Dimensions

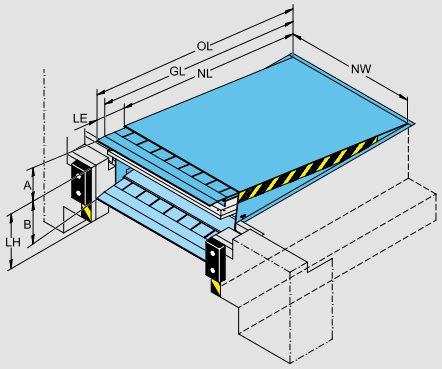


NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LE	Leveler extension
LH	Leveler height
A	Working range above dock level
B	Working range below dock level

NL	Nominal length	2000	2500	3000
LH	Leveler height	830	830	900
PD	Pit depth	850	850	920
A	Range above dock	380	450	520
B	Range below dock	460	450	450
OL	Overall length	3000	3500	4000
GL	Gradient length	2860	3360	3860

Nominal width 2000, 2200 for all sizes

Electrical preparations

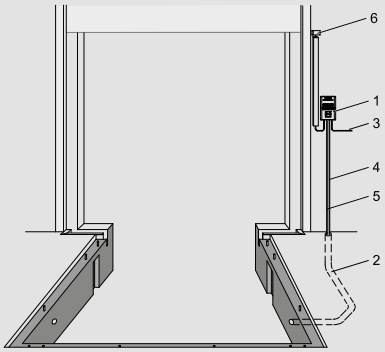


1	Control unit (included in the delivery)	
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 1,5 kW
4	Cable:	7 x 0,75 mm²
5	Motor cable:	4 x 1,5 mm²
6	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for Tele lip levelers



ASSA ABLOY DE6090DI Dock-IN

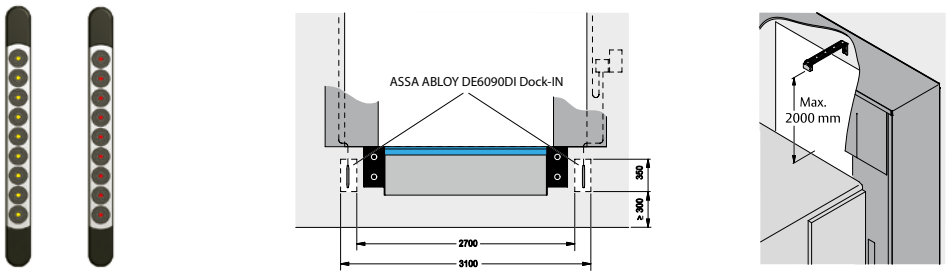

Standard available colours

Red
RAL 3002

Green
RAL 6005

Blue
RAL 5010

Jet Black
RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler

Crawford DL6020TR

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



The dock leveler upgrade solution - for replacement of existing levelers

A Crawford DL6020TR Teledock Replacement is a cost-effective upgrade solution to replace obsolete dock levelers. The wide sizes range and the variety of frame designs make it possible to replace existing levelers without any reconstruction. Your expert from Crawford will do the visual inspection and find the best solution for your individual situation.

The Crawford DL6020TR Teledock Replacement:

- Preventive maintenance is easy and fast to secure functionality and avoid downtimes.
- Telescopic lip giving optimal load utilization of the whole vehicle bed area.
- Larger contact area between vehicle bed and dock leveler.
- Easy and comfortable operation.
- Optimal and safe positioning on the vehicle bed.


ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.

ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world's first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Sizes – pit length	1815 mm – 3015 mm
Sizes – nominal length	1800 mm – 3000 mm
Sizes – pit width	1760 mm – 2310 mm
Sizes – nominal width	1700 mm – 2250 mm
Leveler height	600, 700, 800 mm
Load capacity	60 kN (6 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 520 mm down to 440 mm
Platform tear-plate thickness	8/10 mm
Max. point load leveler platform	1,3 N / mm² (6 mm tear plate) 6,5 N / mm² (8 mm tear plate)
Lip type and length	telescopic, 500/1000 mm ergonomic, 345 mm
Lip material	steel or aluminium
Control unit protection class	IP 54
European standard	EN 1398 Dock levelers


Dimensions

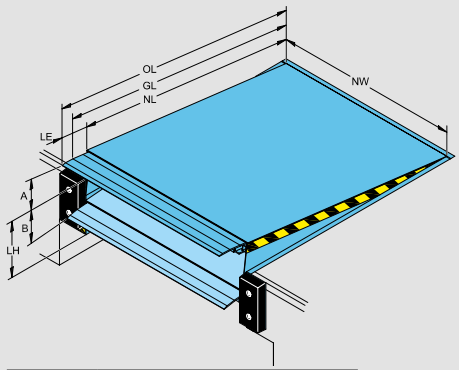

NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LE	Leveler extension
LH	Leveler height
A	Working range above dock level
B	Working range below dock level
DH	Dock height
DW	Door width

Sizes – pit length	1815 mm – 3015 mm
Sizes – nominal length	1800 mm – 3000 mm
Sizes – pit width	1760 mm – 2310 mm
Sizes – nominal width	1700 mm – 2250 mm
Leveler height	600, 700, 800 mm
Vertical working range Rise above dock Fall below dock	 up to 520 mm down to 440 mm

Electrical preparations

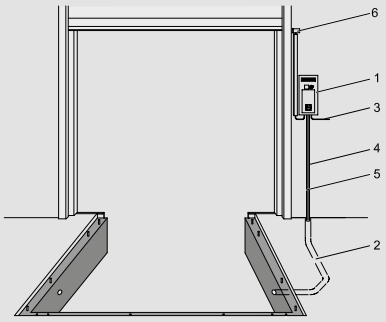


1	Control unit (included in the delivery)	
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 1,5 kW
4	Cable:	7 x 0,75 mm²
5	Motor cable:	4 x 1,5 mm²
6	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for Tele lip levelers



ASSA ABLOY DE6090DI Dock-IN

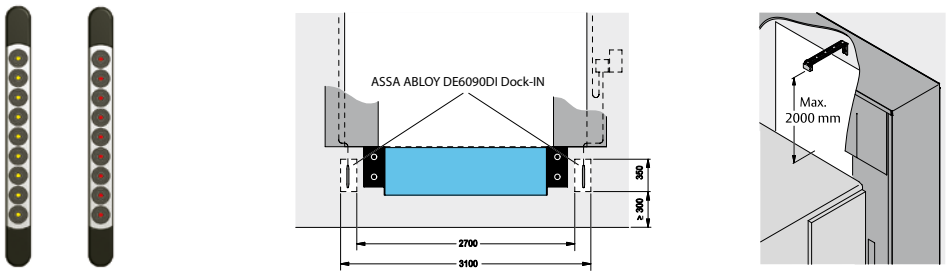

Standard available colours

Red
RAL 3002

Green
RAL 6005

Hot dip galvanised

Blue
RAL 5010

Jet Black
RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler
Crawford DL6030C

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Telescopic lip dock leveler for both trucks and vans

The electro-hydraulic Crawford DL6030C Combidock eliminates the need for different ramp heights and thereby reduces building costs. It is advisable to equip every frequent loading area with at least one Crawford DL6030C Combidock so that vehicles of all sizes can he efficiently handled.

The telescopic lip is supplied in high-stability aluminium alloy which extremely flat, resulting in smoother passages between leveler and truck bed – giving ergonomic as well as economical advantages due to reduced chock loads for people and less wear and tear on the handling equipment.

Vehicles sink and rise during loading and unloading. A special safety control system ensures that the leveler automatically follows the vertical movements of the vehicle bed. Should the bed move horizontally, the same automatic system keeps the lip against the bed, facilitating safe and smooth passages.


Lorry or van - just turn the switch
Simply set the selection switch and the relevant automation program is started. When set on "Small Lorries", leveler lip side tongues are retracted and the width is reduced by 1000 mm. At the same time, the down-force of the leveler platform is reduced by a hydraulic unit. Just use the selector switch for return to standard lorry performance.

ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.

Technical Data

Nominal length	3000, 3500, 4000 mm
Nominal width	2000 mm
Load capacity	lorries 60 kN (6 tonnes) vans 20 kN (2 tonnes)
Vertical working range Rise above dock Fall below dock	 up to 590 mm down to 650 mm
Platform tear-plate thickness	8/10 mm
Max. point load leveler platform	6,5 N / mm² (8 mm tear plate)
Lip material & length	aluminium, 500 mm
Control unit protection class	IP 54
Nominal voltage	400V 3-phase
Nominal motor power	1,5 kW
Control unit	standard truck / city van mode Impulse auto button. Optional with door operation
European standard	EN 1398 Dock levelers


Dimensions

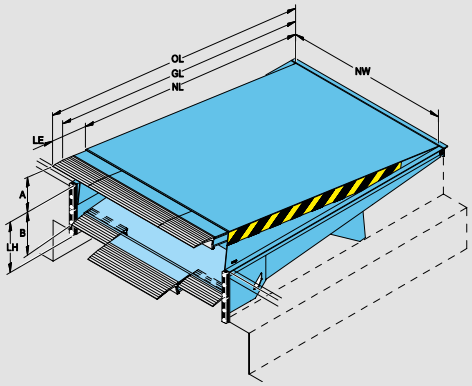

Dimensions		Vertical working range		
NL	LH	A	B - inside LH*	B - down to LP
3000	800	450	375	550
3500	900	560	360	650
4000	930	590	390	650


* when tail lift is in use

NL	Nominal length
OL	Overall length (NL + 500 mm)
GL	Gradient length (NL + 360 mm)
NW	Nominal width (= 2000 mm)
LE	Leveler extension
LH	Leveler height
A	Working range above dock level
B	Working range below dock level
PD	Pit depth

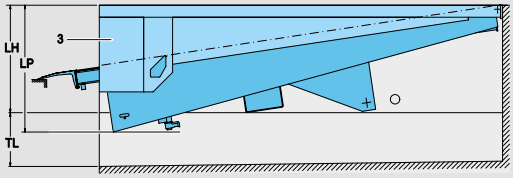

LP	Lowest Position
TL	Tail lift area
3	Leveler frame

Electrical preparations

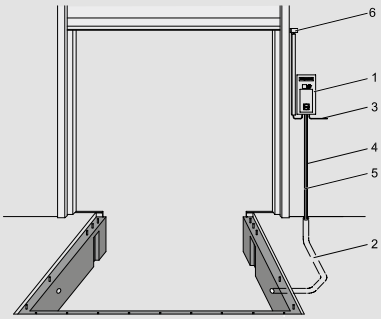

1	Control unit (included in the delivery)	
2	Conduit for wiring internal diameter 50, angles <45° (by others)	
3	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 1,5 kW
4	Control cable:	18 x 0,75 mm²
5	Main connection 230V:	4 x 1,5 mm²
6	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for combidock levelers 950

950 LA CD



950 DLA CD



950 LSA CD




950 DLSA CD




CD = Combidock
L = Leveler
A = Auto Button
D = Door
S = Shelter

Loading mode 20 kN



Loading mode 60 kN



Standard available colours

Red
RAL 3002

Green
RAL 6005

Blue
RAL 5010

Jet Black
RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler
Crawford DL6111S

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Heavy duty swing lip dock leveler

The Crawford DL6111S swingdock is a heavy-duty dock leveler with a load capacity of 100 kN or optional 150 kN. Robust and reliable construction guarantees high performance during the tough handling of high loads.

To enable a safe and efficient process for loading and unloading, the Crawford DL6111S Swingdock connects the building with the vehicle. The result is highest safety for the transfer of goods, avoiding injuries to the personal or damages to the equipment. It is a time saving solution securing shortest possible ways in and out of the warehouse.

The Crawford DL6111S Swingdock:
- Preventive maintenance is easy and fast to secure functionality and avoid downtimes.
- Bent swing lip prevents material handling equipment from "grounding out".
- Robust and reliable construction to guarantee high performance during the tough handling of high loads.


ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.

ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world's first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Normal length 100 kN	2000, 2500, 3000, 3500, 4000 mm
Nominal length 150 kN	2000, 2500, 3000 mm
Normal width	2000, 2200 mm
Load capacity	100 kN (10 tonnes) 150 kN (15 tonnes)
Vertical working range 100 kN Rise above dock Fall below dock	 up to 490 mm down to 310 mm
Vertical working range 150 kN Rise above dock Fall below dock	 up to 390 mm down to 340 mm
Platform tear-plate thickness 100 kN	8/10 mm
Platform tear-plate thickness 150 kN	10/12 mm
Max. point load leveler platform	6,5 N / mm² (8 mm tear-plate & 10 mm tear-plate)
Lip material & length	steel, 500 mm
Control unit protection class	IP 54
Nominal voltage	400V 3-phase 230V 3-phase
Nominal motor power	1,5 kW
European standard	EN 1398 Dock levelers

Dimensions

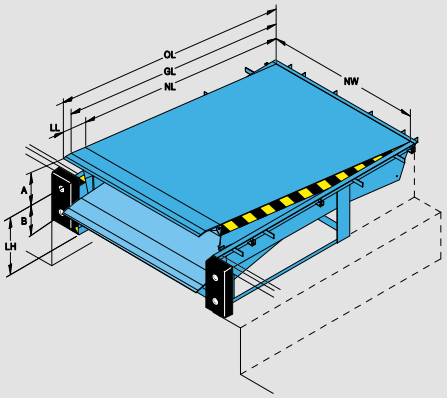


Platform thickness	
Thickness	Max. point load
8 mm	6,5 N / mm²
10 mm	6,5 N / mm²

NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LL	Lip length
LH	Leveler height
A	Working range above dock level
B	Working range below dock level

Dimensions				Vertical working range	
				100kN	
				LL 500	
NL	OL	GL	LH	A	B
2000	NL+350	NL+200	700	280	310
2500	NL+350	NL+200	700	330	310
3000	NL+350	NL+200	700	340	290
3500	NL+350	NL+200	800	430	290
4000	NL+350	NL+200	900	490	310

Nominal width 2000, 2200

Electrical preparations

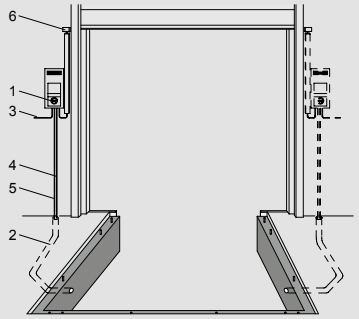


1	Control unit (included in the delivery)	
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 1,5 kW
4	Cable:	7 x 0,75 mm²
5	Motor cable:	4 x 1,5 mm²
6	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for swing lip levelers



ASSA ABLOY DE6090DI Dock-IN

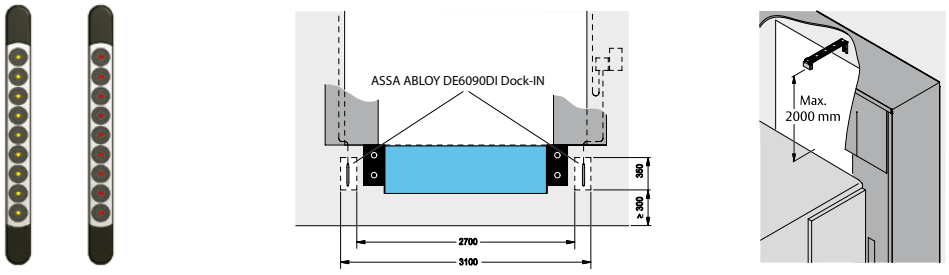

Standard available colours

Red RAL 3002

Green RAL 6005

Hot dip galvanised

Blue RAL 5010

Jet Black RAL 9005

Technical data subject to change without notice. © ASSA ABLOY Entrance Systems AB Q2.0-2017

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler

Crawford DL6111SA

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Hydraulic swing lip dock leveller

Crawford DL6111SA swingdock autodock has a self-supporting frame for easy integration with a building. It forms a base for a complete loadhouse outside the building, containing all relevant components, leveler, shelter and door to make it a total docking solution. It is a heavy-duty dock leveler with a load capacity of 100 kN or optional 150 kN. Robust and reliable construction guarantees high performance during the tough handling of high loads

To enable a safe and efficient process for loading and unloading, the Crawford DL6111SA Swingdock connects the building with the vehicle. The result is highest safety for the transfer of goods, avoiding injuries to the personal or damages to the equipment. It is a time saving solution securing shortest possible ways in and out of the warehouse.

The Crawford DL6111SA Swingdock:

- Preventive maintenance is easy and fast to secure functionality and avoid downtimes.
- Bent swing lip prevents material handling equipment from “grounding out”.
- Robust and reliable construction to guarantee high performance during the tough handling of high loads.

ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.


ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world’s first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Nominal length 100 kN[1]	2000, 2450, 3000 mm
Normal width AD	3300, 3500, 3600, 3750 mm
Leveler width	2000, 2200 mm
Load capacity	100 kN (10 tonnes) 150 kN (15 tonnes)
Vertical working range 100 kN Rise above dock Fall below dock	 up to 410 mm down to 310 mm
Vertical working range 150 kN Rise above dock Fall below dock	 up to 390 mm down to 340 mm
Platform tear-plate thickness 100 kN	8/10 mm
Platform tear-plate thickness 150 kN	10/12 mm
Max. point load leveler platform	6,5 N / mm² (8 mm tear-plate & 10 mm tear-plate)
Lip material & length	steel, 500 mm
Control unit protection class	IP 54
Nominal voltage	400V 3-phase 230V 3-phase
Nominal motor power	1,5 kW
European standard	EN 1398 Dock levelers

1) Other sizes on request

Dimensions

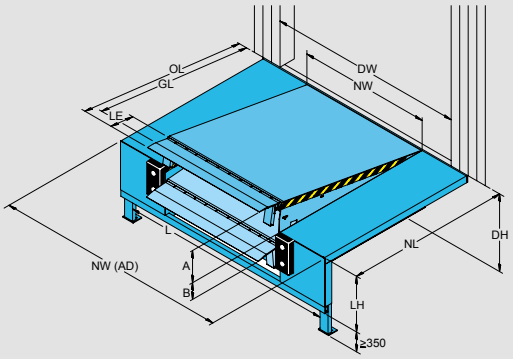


Platform thickness	
Thickness	Max. point load
8 mm	6,5 N / mm²
10 mm	6,5 N / mm²

NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LE	Leveler extension
LH	Leveler height
A	Working range above dock level
B	Working range below dock level
DH	Dock height
DW	Door width
NW (AD)	Nominal width Autodock (incl. side tread panels)
L	Distance between plinths
OW (AD)	Overall width Autodock = NW (AD) - 20

Dimensions				Vertical working range	
				100kN	
				LL 500	
NL	OL	GL	LH	A	B
2000	NL+350	NL+200	800	270	310
2450	NL+350	NL+200	800	360	300
3000	NL+350	NL+200	800	10	300

Nominal width (NW) 2000, 2200
Nominal width NW (AD) 3300, 3500, 3600, 3750

Electrical preparations

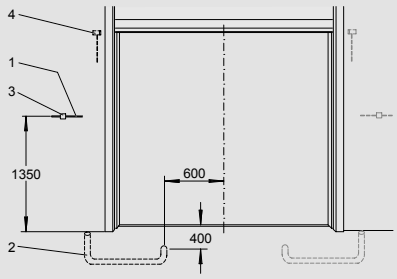


1	Control unit (included in the delivery)	
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 1,5 kW
4	Cable:	7 x 0,75 mm²
5	Motor cable:	4 x 1,5 mm²
6	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for swing lip levelers



ASSA ABLOY DE6090DI Dock-IN

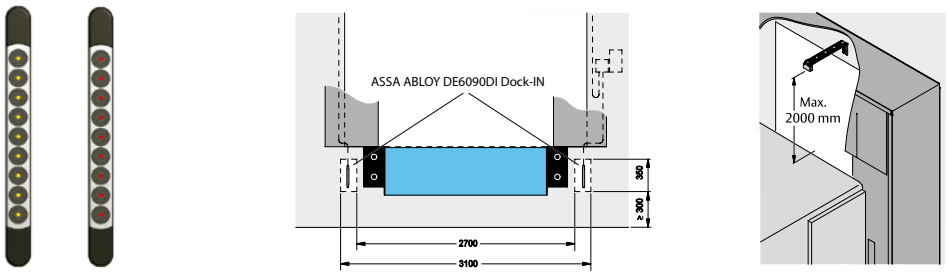

Standard available colours

Red
RAL 3002

Green
RAL 6005

Hot dip galvanised

Blue
RAL 5010

Jet Black
RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler
Crawford DL6121T

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Heavy duty telescopic lip dock leveler

The Crawford DL6021T Teledock is heavy duty telescopic lip dock leveler with a load capacity of 100 kN and 150 kN. The Crawford DL6021T Teledock is suitable for every loading situation – regardless of its complexity. The main advantage compared to other levelers is the movable telescopic lip which can be precisely positioned on the vehicle bed, thus giving optimal load utilisation of the whole vehicle bed area.

The Crawford DL6021T Teledock provides a larger contact area between vehicle bed and dock leveler for optimal and safe positioning on the vehicle bed.

The Crawford DL6021T Teledock:
- Preventive maintenance is easy and fast to secure functionality and avoid downtimes.
- Robust and reliable construction to guarantee high performance during the tough handling of high loads.
- Special durable design of the telescopic lip.


ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.

ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world's first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Normal length 100 kN	2000, 2500, 3000, 3500, 4000, 4500 mm
Nominal length 150 kN	2000, 2500, 3000 mm
Normal width	2000, 2200 mm
Load capacity	100 kN (10 tonnes) 150 kN (15 tonnes)
Vertical working range 100 kN Rise above dock Fall below dock	 up to 530 mm down to 440 mm
Vertical working range 150 kN Rise above dock Fall below dock	 up to 460 mm down to 390 mm
Platform tear-plate thickness 100 kN	8/10 mm
Platform tear-plate thickness 150 kN	10/12 mm
Max. point load leveler platform	6,5 N / mm² (8 mm tear plate & 10 mm tear plate)
Lip material and length	steel, 500/1000 mm
Control unit protection class	IP 54
Temperature range hydraulic oil	-20°C - +60°C
European standard	EN 1398 Dock levelers

Dimensions

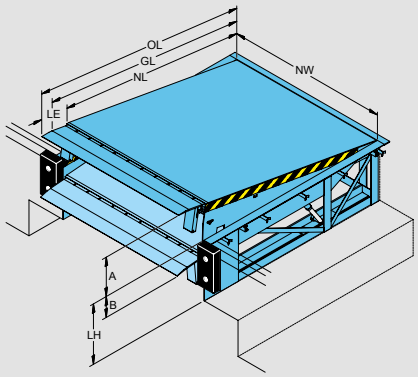


NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LE	Lip extension
LH	Leveler height
A	Working range above dock level
B	Working range below dock level

Platform thickness	
Thickness	Max. point load
8 mm	6,5 N / mm²
10 mm	6,5 N / mm²

Dimensions				Vertical working range			
				LE 500		LE 1000	
NL	OL	GL	LH	A	B	A	B
2000	NL+LE	NL+(LE-150)	700	290	340	360	410
2500	NL+LE	NL+(LE-150)	700	280	340	330	390
3000	NL+LE	NL+(LE-150)	800	370	390	440	440
3500	NL+LE	NL+(LE-150)	900	440	380	510	420
4000	NL+LE	NL+(LE-150)	900	460	410	510	410
4500	NL+LE	NL+(LE-150)	900	480	480	530	400

Nominal width 2000, 2200

Electrical preparations

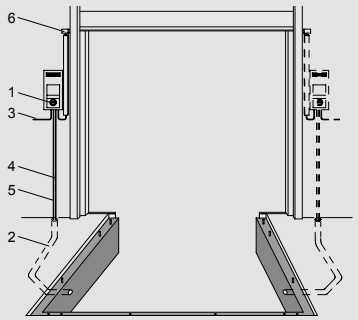


1	Control unit (included in the delivery)	
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 1,5 kW
4	Cable:	7 x 0,75 mm²
5	Motor cable:	4 x 1,5 mm²
6	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for Tele lip levelers



ASSA ABLOY DE6090DI Dock-IN

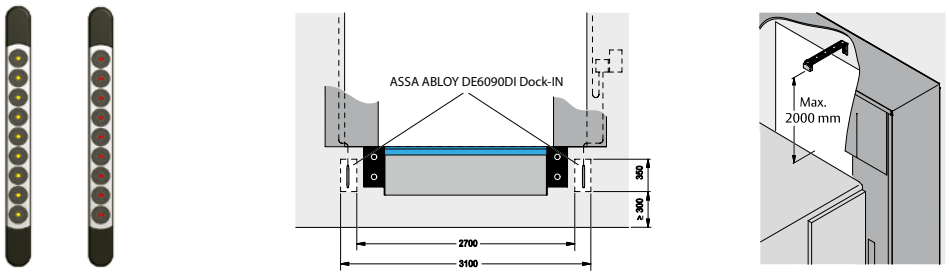

Standard available colours

Red
RAL 3002

Green
RAL 6005

Hot dip galvanised

Blue
RAL 5010

Jet Black
RAL 9005

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock leveler

Crawford DL6121TA

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Heavy duty telescopic lip dock leveler

Crawford DL6121TA teledock autodock has a self-supporting frame for easy integration with a building. It forms a base for a complete Crawford Loadhouse outside the building. It is a heavy-duty dock leveler with a load capacity of 100 kN or optional 150 kN. Robust and reliable construction guarantees high performance during the tough handling of high loads.

The Crawford DL6121TA Teledock provides a larger contact area between vehicle bed and dock leveler for optimal and safe positioning on the vehicle bed.

The Crawford DL6121TA Teledock:

- Preventive maintenance is easy and fast to secure functionality and avoid downtimes.
- Robust and reliable construction to guarantee high performance during the tough handling of high loads.
- Special durable design of the telescopic lip.

ASSA ABLOY 950 series - the intelligent, all in one, docking control system
The innovative and unique 950 series docking control system gives you direct control of the dock leveler, dock shelter and door all in one control unit. With only a few self explaining buttons it is easy to operate, to meet the demands of modern logistics. Separate steering units or complex wiring are no longer needed.


ASSA ABLOY DE6090DI Dock-IN
ASSA ABLOY Dock-IN is the world's first combined solution with parking guide and traffic lights in one system. ASSA ABLOY Dock-IN ensures a safe and secure dock in procedure with the help of white guiding lights and red traffic lights. There is no need to paint and repaint guiding lines on the asphalt or install conventional steel parking guides, which are an obstacle in the yard. With modern LED technology ASSA ABLOY Dock-IN has a low energy consumption and a long life.

Technical Data

Normal length[1]	2000, 2450, 3000 mm
Normal width	3300, 3500, 3600, 3750 mm
Load capacity	100 kN (10 tonnes) 150 kN (15 tonnes)
Vertical working range 100 kN Rise above dock Fall below dock	 up to 410 mm down to 460 mm
Vertical working range 150 kN Rise above dock Fall below dock	 up to 490 mm down to 390 mm
Platform tear-plate thickness 100 kN	8/10 mm
Platform tear-plate thickness 150 kN	10/12 mm
Max. point load leveler platform	6,5 N / mm² (8 mm tear plate & 10 mm tear plate)
Lip material and length	steel, 500/1000 mm
Control unit protection class	IP 54
Temperature range hydraulic oil	-20°C - +60°C
European standard	EN 1398 Dock levelers

1) Other sizes on request

Dimensions

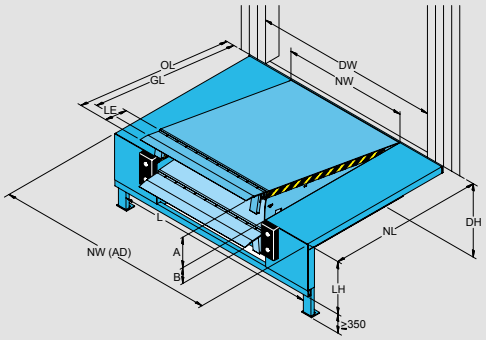


Platform thickness	
Thickness	Max. point load
8 mm	6,5 N / mm²
10 mm	6,5 N / mm²

NL	Nominal length
OL	Overall length
GL	Gradient length
NW	Nominal width
LE	Leveler extension
LH	Leveler height
A	Working range above dock level
B	Working range below dock level
DH	Dock height
DW	Door width
NW (AD)	Nominal width Autodock (incl. side tread panels)
L	Distance between plinths
OW (AD)	Overall width Autodock = NW (AD) - 20

Dimensions				Vertical working range			
				100 kN			
				LE 500		LE 1000	
NL	OL	GL	LH	A	B	A	B
2000	NL+LE	NL+(LE-150)	700	240	330	290	390
2450	NL+LE	NL+(LE-150)	700	340	350	400	400
3000	NL+LE	NL+(LE-150)	800	350	400	410	460

Nominal width 2000, 2200
Nominal width of Autodock 3300, 3500, 3600, 3750

Electrical preparations

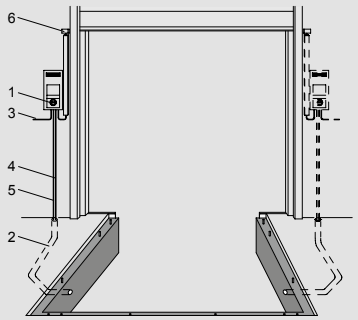


1	Control unit (included in the delivery)	
2	Conduit for wiring internal diameter 70, angles <45° (by others)	
3	Mains supply: Mains fuse: Motor power:	3 / N / PE AC 50 Hz 230 / 400V D0 10 A gL 1,5 kW
4	Cable:	7 x 0,75 mm²
5	Motor cable:	4 x 1,5 mm²
6	Optional safety switch on sectional door to disable leveler when door is closed*	

*Non standard

Operating functions for Tele lip levelers



ASSA ABLOY DE6090DI Dock-IN

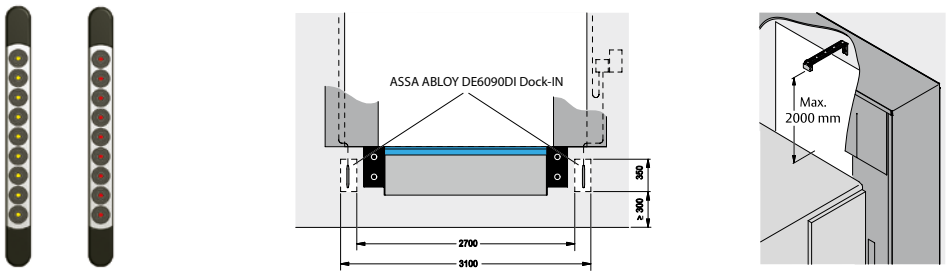

Standard available colours

Red
RAL 3002

Green
RAL 6005

Hot dip galvanised

Blue
RAL 5010

Jet Black
RAL 9005

Technical data subject to change without notice. © ASSA ABLOY Entrance Systems AB Q2.0-2017

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Docking drawbridge
Crawford DB6050KBS

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions




Compact movable drawbridge leveler

The Crawford DB6050KBS drawbridge leveler can be moved sideways in a guide rail principally designed for external applications. It is the flexible solution for the lower working range up to about 135 mm level equalization. The outstanding feature is the quick and easy handling.

The high-tensile light metal allows weights up to 40 kN. The Crawford DB6050KBS drawbridge leveler complies with the European EN 1398 standard.

Feature and benefits:
- Non slip surface for safe transshipment of goods
- Easy to keep clean
- Robust and maintenance free
- Easy Handling and flexible positioning

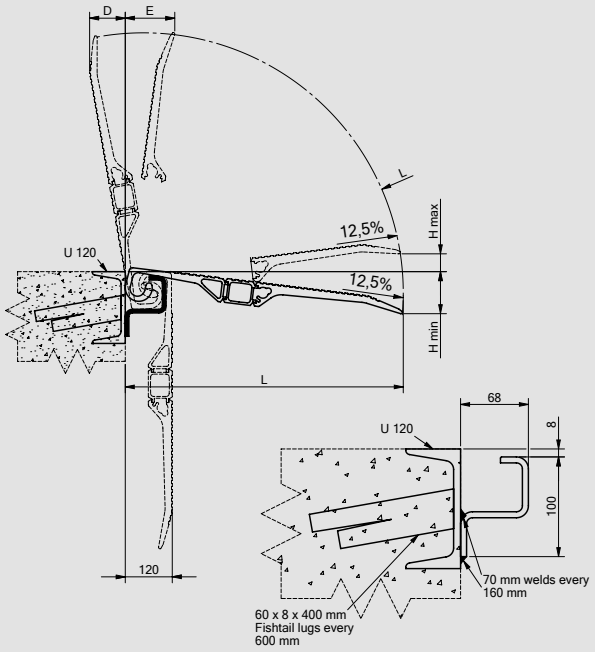

Type	Order Number	Length (L)	Width (B)	Dim. (A)	Height Difference (H) min.	Height Difference (H) max.	Load Cap (kgs/ea)	Weight (kgs/ea)
KBS 00	302.21.000	410	1250	80	- 70	+ 30	4000	19
KBS 12	302.21.012	535	1250	100	- 90	+ 45	4000	24
KBS 13	302.21.013	785	1250	150	- 120	+ 75	4000	31
KBS 02	302.21.002	910	1250	170	- 135	+ 90	4000	36
KBS 04	302.21.004	410	1500	80	- 70	+ 30	4000	23
KBS 14	302.21.014	535	1500	100	- 90	+ 45	4000	28
KBS 15	302.21.015	785	1500	150	- 120	+ 75	4000	38
KBS 06	302.21.006	910	1500	170	- 135	+ 90	4000	44
								(kg/m)
	319.23.006	Guide rail, galvanized, 3000 mm long						8
	319.23.016	Guide rail, galvanized, 2500 mm long						8
	319.23.017	Guide rail, galvanized, 2000 mm long						8

Technical data subject to change without notice. © ASSA ABLOY Entrance Systems AB Q1.0-2017

Docking drawbridge
Crawford DB6050SKB

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions




Large range fixed or movable drawbridge leveler

The Crawford DB6050SKB drawbridge leveler can be installed in two different ways. It is either fixed in position by welding directly to a solid steel profile in the dock edge or movable sideways in a guide rail. It is the flexible solution for external applications for the medium working range up to about 200 mm level equalization. The outstanding feature is the quick and easy handling.

The high-tensile light metal allows weights up to 40 kN. The Crawford DB6050SKB drawbridge leveler complies with the European EN 1398 standard.

Feature and benefits:
- Non slip surface for safe transshipment of goods
- Easy to keep clean
- Robust and maintenance free
- Easy Handling and flexible positioning

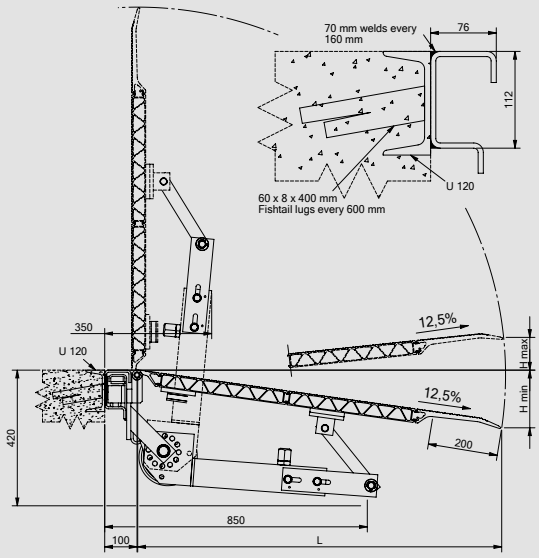

SKB movable with spring system

Type	Order Number	Length (L)	Width (B)	Height Difference (H) min.	Height Difference (H) max.	Load Cap (kgs/ea)	Weight (kgs/ea)
Movable model							
SKBS 01	304.21.000	815	1250	- 120	+ 80	4000	67
SKBS 02*	304.21.001	1315	1250	- 185	+ 140	2500	102
SKBS 03*	304.21.002	1565	1250	- 215	+ 175	1750	113
SKBS 10	304.21.003	565	1500	- 90	+ 50	4000	67
SKBS 11	304.21.004	815	1500	- 120	+ 80	4000	77
SKBS 12*	304.21.005	1065	1500	- 155	+ 110	4000	103
SKBS 13*	304.21.006	1315	1500	- 185	+ 140	4000	114
SKBS 14*	304.21.007	1565	1500	- 215	+ 175	4000	128
* Model with spring system							(kg/m)
	319.22.002	Guide rail unpainted 2000/3000 mm long					12
	319.23.007	Guide rail galvanised 2000/3000 mm long					12

Technical data subject to change without notice. © ASSA ABLOY Entrance Systems AB Q1.0-2017

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock shelter
Crawford DS6060A

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Standard curtain dock shelter with aluminium frame

The Crawford DS6060A is a curtain dock shelter which is the standard solution for energy saving oriented operators. It is equipped with a weight reducing aluminium frame. The vehicle reverses into the Crawford DS6060A curtain shelter which seals it off with flexible side and top curtains, giving weather protection during the loading and unloading process.

The result is an improved working environment and goods protection. The curtain material has a very high wear and tear resistance. The Crawford curtain dock shelter programme comprises a number of models, meeting all customer demands and suitable for a wide range of vehicle sizes.

Should a vehicle deviate from the dock-in centre-line and hit the shelter frame, built-in springs allow the shelter to follow the movement without being damaged. Its flexibility and high wear and tear resistance, in combination with a high price-performance ratio, contribute to the fact that the vast majority of all European loading bays are equipped with this standard dock shelter!

Unique fixation of front curtains to frame
Unlike conventional mechanical dock shelters, the front curtains of the Crawford DS6060A are fixed to the front frames with steel balls. The steel balls hold the fabric in place inside the frame in a flexible way allowing movement during impact from trucks. The result is that the tear resistance of the fabric is increased and breaking points are avoided. This solution is based on factory made holes in the fabric versus holes made by screws or nits.

High focus on the environment
All Crawford mechanical dock shelters can be equipped with a number of standard options for improved working conditions and less draught into the building. See the next page for more detailed information.

Technical Data

Normal height	3200, 3400, 3600 mm
Normal width	3250, 3450 mm
Normal depth	600, 900 mm
Top curtain	1000, 1200 mm
Side curtain	600, 700 mm
Curtain colour	black
Parking guides	white, yellow
Wall fixings	concrete, sandwich, light concrete, Loadhouse, cavity, insulated panel
Top and side curtains	double layer high quality polyester
Thickness	3,0 mm
Weight	Approx. 3400 g/m²
Continuous roof cover	one layer high quality polyester
Thickness	0,5 mm
Weight	Approx. 680 g/m²
Flammability all curtains	DIN 75200

Dimensions

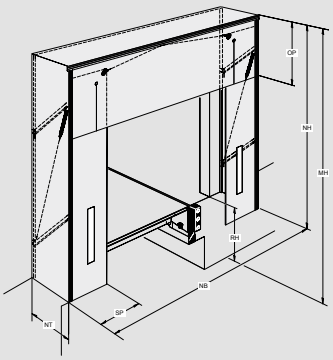


Abb.	Dimension	Value (mm)
NW	Nominal width	3250, 3450
NH	Nominal height	3200, 3400, 3600
OP	Length of top curtain	1000, 1200
SP	Width of side curtain	600, 700
MH	Installation height	4500 (recommended)
NT	Nominal depth	600, 900
RH	Ramp height	

Description of available options

Standard options for improved working conditions and less draught into the building.

A - Rain Channel
The unique channel is integrated in the middle of the roof part.
- Controlled water drainage
- The water is led out left and right, not into the loading area


B - Splitted top curtain
4 slits with double overlapping layer of PVC curtain material in the main wear area.
- Flexible coverage of rear top corners of docked vehicle for best sealing
- Less draught into the building

C - Digit on top curtain
300 mm high letters or numbers printed in the middle of the top curtain.
- Individual customised marking of loading bays

D - Reinforced rubber flaps
Robust rubber flap placed left and right in lower corners behind the front curtain.
- Increased pressure on the docked vehicle body for best sealing
- Improved stability for the complete dock shelter in windy area
- Less draught into the building


E - Corner seals
Triangle or round cushions covered with PVC curtain material in lower corners of the dock shelter.
- Minimization of draught from below during loading and unloading

F - Notching on both sides
From factory a square of the lower corner front curtain is cut out.
- Avoid damaged front curtains due to the collision between vehicle and buffer.
- Recommended in combination with min. 140 mm deep buffers, like RB, EBH, EBF or steel spring buffer

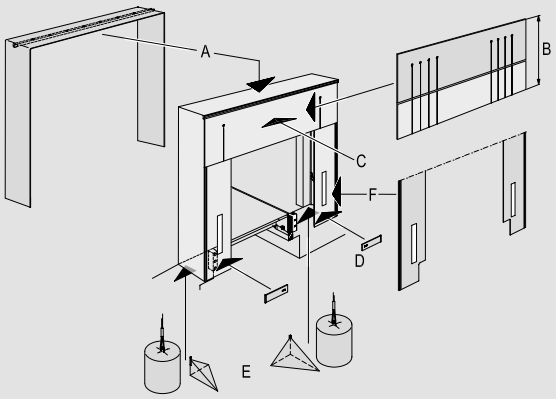


Wall fixings


Cavity wall

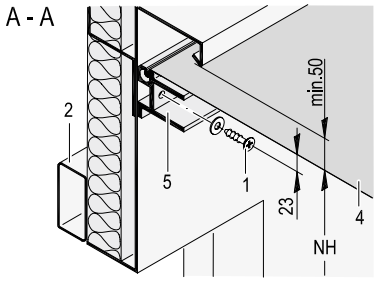

Concrete wall

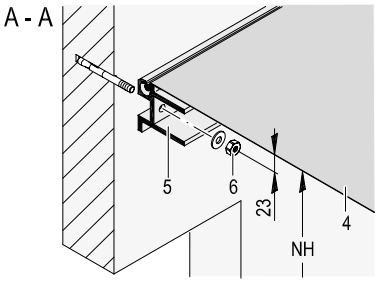

Insulated wall

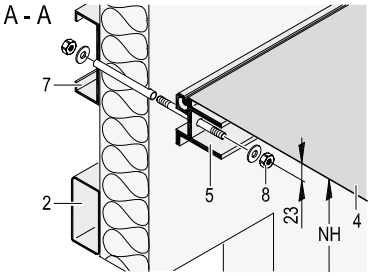

1	Self-tapping screw
2	Door mounting frame rectangular tube 80 x 40 x 2
3	Sheet metal 3 mm thick
4	Roof cover
5	Extruded aluminium section - rear frame
6	Expansion bolt
7	Mounting frame for dock shelter, 120 x 40 x 15 x 3
8	Threaded bolt with nut, washer and spacer tube

2, 3, 7 are not included in installation price

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock shelter

Crawford DS6060P

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Curtain dock shelter in a large variety of dimensions

The Crawford DS6060P is a curtain dock shelter which is available in a large variety of heights and widths. This model includes a self-adjusting top section which automatically adapts to different vehicle heights and vertical movements. The vehicle reverses into Crawford DS6060P curtain shelter which seals it off with flexible side and top curtains, giving weather protection during the loading and unloading process.

The result is an improved working environment and goods protection. The curtain material has a very high wear and tear resistance. The Crawford curtain dock shelter programme comprises a number of models, meeting all customer demands and suitable for a wide range of vehicle sizes.

Should a vehicle deviate from the dock-in centre-line and hit the shelter frame, built-in springs allow the shelter to follow the movement without being damaged. Its flexibility and high wear and tear resistance, in combination with a high price-performance ratio, contribute to the fact that the vast majority of all European loading bays are equipped with this standard dock shelter!

Unique fixation of front curtains to frame
Unlike conventional mechanical dock shelters, the front curtains of the Crawford DS6060P are fixed to the front frames with steel balls. The steel balls hold the fabric in place inside the frame in a flexible way allowing movement during impact from trucks. The result is that the tear resistance of the fabric is increased and breaking points are avoided. This solution is based on factory made holes in the fabric versus holes made by screws or nits.

High focus on the environment
All Crawford mechanical dock shelters can be equipped with a number of standard options for improved working conditions and less draught into the building. See the next page for more detailed information.

Technical Data

Normal height	3200, 3400, 3600, 3800, 4000, 4200, 4400, 4600 mm
Normal width	3200, 3250, 3400, 3450, 3500 mm
Normal depth	600, 900 mm
Top curtain	1000, 1200, 1500 mm
Side curtain	600, 700 mm
Curtain colour	black
Parking guides	white, yellow
Wall fixings	concrete, sandwich, light concrete, Loadhouse, cavity, insulated panel
Top and side curtains	double layer high quality polyester
Thickness	3,0 mm
Weight	Approx. 3400 g/m²
Continuous roof cover	one layer high quality polyester
Thickness	0,5 mm
Weight	Approx. 680 g/m²
Flammability all curtains	DIN 75200

Dimensions

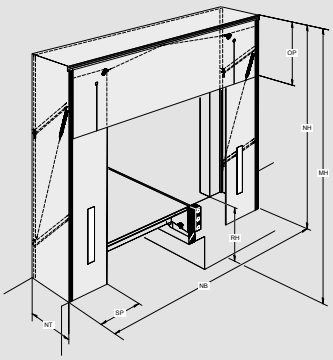


Abb.	Dimension	Value (mm)
NW	Nominal width	3200, 3250, 3400, 3450, 3500
NH	Nominal height	3200, 3400, 3600, 3800, 4000, 4400, 4600
OP	Length of top curtain	1000, 1200, 1500
SP	Width of side curtain	600, 700
MH	Installation height	4500 (recommended)
NT	Nominal depth	600, 900
RH	Ramp height	

Description of available options

Standard options for improved working conditions and less draught into the building.

A - Rain Channel
The unique channel is integrated in the middle of the roof part.
- Controlled water drainage
- The water is led out left and right, not into the loading area


B - Splitted top curtain
4 slits with double overlapping layer of PVC curtain material in the main wear area.
- Flexible coverage of rear top corners of docked vehicle for best sealing
- Less draught into the building

C - Digit on top curtain
300 mm high letters or numbers printed in the middle of the top curtain.
- Individual customised marking of loading bays

D - Reinforced rubber flaps
Robust rubber flap placed left and right in lower corners behind the front curtain
- Increased pressure on the docked vehicle body for best sealing
- Improved stability for the complete dock shelter in windy area
- Less draught into the building


E - Corner seals
Triangle or round cushions covered with PVC curtain material in lower corners of the dock shelter.
- Minimization of draught from below during loading and unloading

F - Notching on both sides
From factory a square of the lower corner front curtain is cut out.
- Avoid damaged front curtains due to the collision between vehicle and buffer
- Recommended in combination with min. 140 mm deep buffers, like RB, EBH, EBF or steel spring buffer

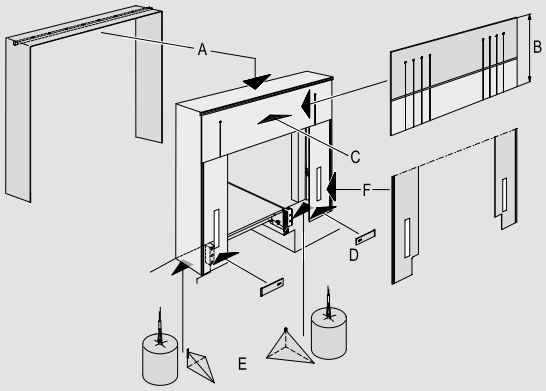


Wall fixings


Cavity wall

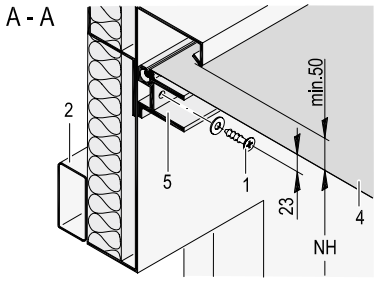

Concrete wall

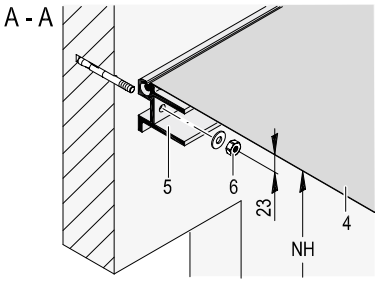

Insulated wall

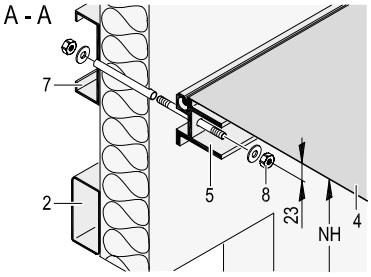

1	Self-tapping screw
2	Door mounting frame rectangular tube 80 x 40 x 2
3	Sheet metal 3 mm thick
4	Roof cover
5	Extruded aluminium section - rear frame
6	Expansion bolt
7	Mounting frame for dock shelter, 120 x 40 x 15 x 3
8	Threaded bolt with nut, washer and spacer tube

2, 3, 7 are not included in installation price

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock shelter
Crawford DS6060S

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Standard curtain dock shelter with steel frame

The Crawford DS6060S is a curtain dock shelter which is the standard solution for energy saving oriented operators. The shelter is equipped with a steel frame. The vehicle reverses into the Crawford DS6060S dock shelter which seals it off with flexible side and top curtains, giving weather protection during the loading and unloading process.

The result is an improved working environment and goods protection. The curtain material has a very high wear and tear resistance. The Crawford curtain dock shelter programme comprises a number of models, meeting all customer demands and suitable for a wide range of vehicle sizes.

Should a vehicle deviate from the dock-in centre-line and hit the shelter frame, built-in springs allow the shelter to follow the movement without being damaged. Its flexibility and high wear and tear resistance, in combination with a high price-performance ratio, contribute to the fact that the vast majority of all European loading bays are equipped with this standard dock shelter!

Unique fixation of front curtains to frame
Unlike conventional mechanical dock shelters, the front curtains of the Crawford DS6060S are fixed to the front frames with steel balls. The steel balls hold the fabric in place inside the frame in a flexible way allowing movement during impact from trucks. The result is that the tear resistance of the fabric is increased and breaking points are avoided. This solution is based on factory made holes in the fabric versus holes made by screws or nits.

High focus on the environment
All Crawford mechanical dock shelters can be equipped with a number of standard options for improved working conditions and less draught into the building. See the next page for more detailed information.

Technical Data

Normal height	3280, 3480, 3680 mm
Normal width	3250, 3450 mm
Normal depth	600, 900 mm
Top curtain	1000 mm
Curtain colour	black
Parking guides	white
Wall fixings	concrete, light concrete, Loadhouse, cavity, insulated panel
Top and side curtains	double layer high quality polyester
Thickness	3,0 mm
Weight	Approx. 3400 g/m²
Continuous roof cover	one layer high quality polyester
Thickness	0,5 mm
Weight	Approx. 680 g/m²
Flammability all curtains	DIN 75200

Dimensions

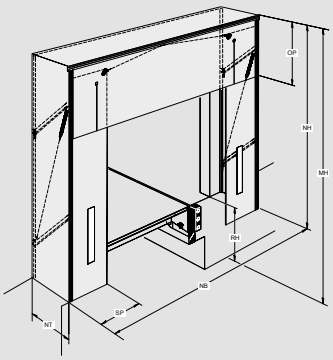


Abb.	Dimension	Value (mm)
NW	Nominal width	3250, 3450
NH	Nominal height	3280, 3480, 3680
OP	Length of top curtain	1000, 1200, 1500
SP	Width of side curtain	600, 700
MH	Installation height	4500 (recommended)
NT	Nominal depth	600, 900
RH	Ramp height	

Description of available options

Standard options for improved working conditions and less draught into the building.

A - Rain Channel
The unique channel is integrated in the middle of the roof part.
- Controlled water drainage
- The water is led out left and right, not into the loading area


B - Splitted top curtain
4 slits with double overlapping layer of PVC curtain material in the main wear area.
- Flexible coverage of rear top corners of docked vehicle for best sealing
- Less draught into the building

C - Digit on top curtain
300 mm high letters or numbers printed in the middle of the top curtain.
- Individual customised marking of loading bays

D - Reinforced rubber flaps
Robust rubber flap placed left and right in lower corners behind the front curtain
- Increased pressure on the docked vehicle body for best sealing
- Improved stability for the complete dock shelter in windy area
- Less draught into the building


E - Corner seals
Triangle or round cushions covered with PVC curtain material in lower corners of the dock shelter.
- Minimization of draught from below during loading and unloading

F - Notching on both sides
From factory a square of the lower corner front curtain is cut out.
- Avoid damaged front curtains due to the collision between vehicle and buffer
- Recommended in combination with min. 140 mm deep buffers, like RB, EBH, EBF or steel spring buffer

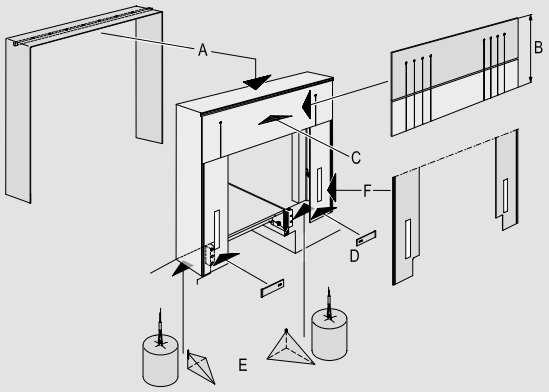


Wall fixings


Cavity wall

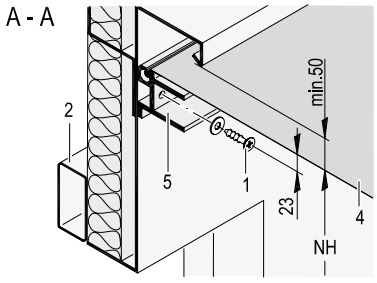

Concrete wall

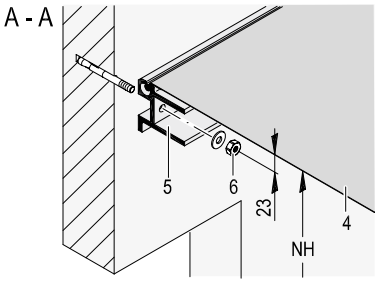

Insulated wall

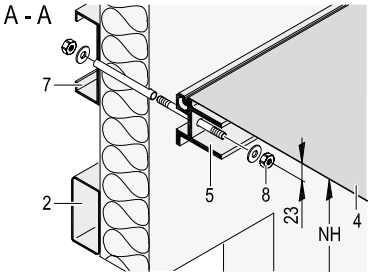

1	Self-tapping screw
2	Door mounting frame rectangular tube 80 x 40 x 2
3	Sheet metal 3 mm thick
4	Roof cover
5	Extruded aluminium section - rear frame
6	Expansion bolt
7	Mounting frame for dock shelter, 120 x 40 x 15 x 3
8	Threaded bolt with nut, washer and spacer tube

2, 3, 7 are not included in installation price

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock shelter
Crawford DS6070B

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Inflatable dock shelter

The food industry puts high demands on loading bay sealing in order to keep the cold chain as intact as possible. The dock shelter must provide continuous weather protection throughout the entire loading and unloading operation.

Contrary to other types of dock shelters, with the Crawford DS6070B inflatable shelter the vehicle does not push towards the shelter. Instead, the shelter is inflated around the docked vehicle, providing complete sealing. The inflatable shelters are suitable for a wide range of vehicle sizes and their sealing capacity exceeds by far the standard normally required by operators.

In rest position, the Crawford DS6070B inflatable shelter is completely retracted behind the side structures, giving the vehicle driver the possibility to use the complete width of the loading bay when reversing into it. In addition, yellow front line indicators further facilitate the dock-in navigation. Stable collision protectors at the ramp height prevent shelter damages.

Insulated top and side panels
The inflatable dock shelter is installed into a frame construction covered by insulated panels, giving additional insulation effects. The design facilitates easy and fast component exchange, should this be needed.

High quality material composition
The side and top inflatable airbags are made of impact resistant material with a strong, woven core. It is non-flammable, colour stable and highly resistant to weather impacts – in other words a material well suited for optimal function in rough docking environments.

Technical Data

Nominal height	3755, 4055, 4355, 4555 mm
Nominal free height	3300, 3600, 3900, 4100 mm
Nominal width	3600 mm
Nominal depth	770, 1020 mm
Top bag extension	1000, 1300 mm
Side bag extension	650 mm
Walls and roof	insulated panel, 42 mm
Standard RAL colours	9002, 9016, 1021, 3002, 5010, 6005, 7016, 9006, 9007, 9010
Fabric quality Top bag Side bag rear Side bag front	PVC coated polyester 500 g/m², thickness 0,5 mm 600 g/m², thickness 0,5 mm 2500 g/m², thickness 2 mm
Fan	230 V, 1-phase, 50 Hz, 250 W noise level: 65 dBA in working position
Operating	Switch control included Other controls available as option
Temperature range	-30°C to +60°C

Dimensions


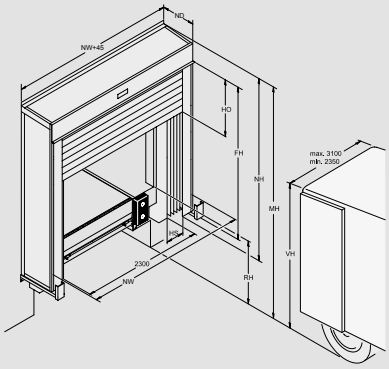


Abb.	Dimension	Value (mm)
NW	Nominal width	3600
NH	Nominal height	3755, 4055, 4355, 4555
ND	Nominal depth	770, 1020
FH	Free height above level*	3300, 3600, 3900, 4100**
HO	Top bag extension	1000, 1300
HS	Side bag extension	650
MH	Installation height	VH+500
RH	Dock height	
VH	Vehicle height	

* depending on MH (installation height)
** maximum sizes


Fixing points

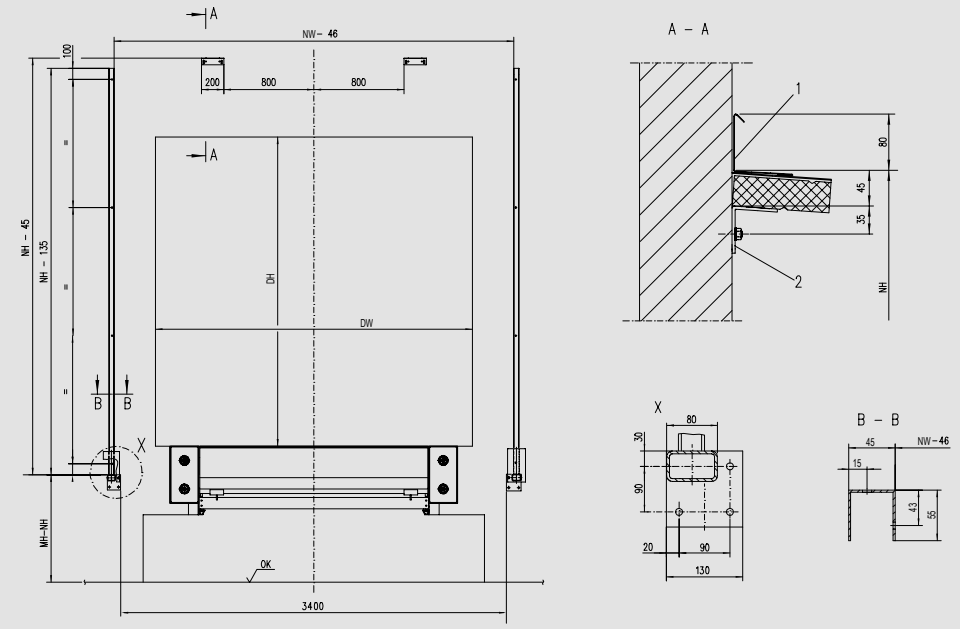

1	Wall mounting profile*
2	Support bracket*

* belongs to the wall fixing

Wall fixings

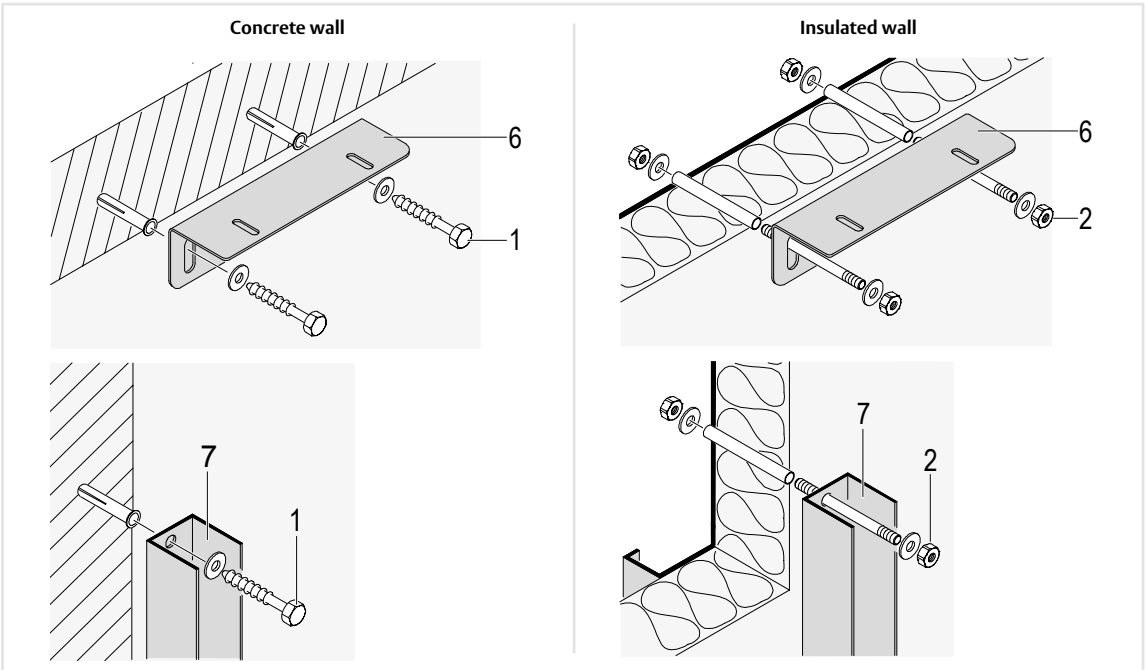

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Dock shelter

Crawford DS6070R

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Inflatable dock shelter

The food industry puts high demands on loading bay sealing in order to keep the cold chain as intact as possible. The dock shelter must provide continuous weather protection throughout the entire loading and unloading operation. The shelter is inflated around the docked vehicle, providing complete sealing. The Crawford inflatable shelters are suitable for a wide range of vehicle sizes and their sealing capacity exceeds by far the standard normally required by operators.

The top seal of the Crawford DS6070R inflatable shelter is a roller design – automatically activated for low or high vehicles. In addition, it follows all vertical movements of the docked vehicle, continuously providing high tightness.

In rest position, the Crawford DS6070R inflatable shelter is completely retracted behind the side structures, giving the vehicle driver the possibility to use the complete width of the loading bay when reversing into it. In addition, yellow front line indicators further facilitate the dock-in navigation. Stable collision protectors at the ramp height prevent shelter damages.

Insulated top and side panels
The inflatable dock shelter is installed into a frame construction covered by insulated panels, giving additional insulation effects. The design facilitates easy and fast component exchange, should this be needed.

High quality material composition
The side and top inflatable airbags are made of impact resistant material with a strong, woven core. It is non-flammable, colour stable and highly resistant to weather impacts – in other words a material well suited for optimal function in rough docking environments.

Technical Data

Nominal height	4055, 4355, 4555 mm
Nominal free height	3600, 3900, 4100 mm
Nominal width	3600 mm
Nominal depth	770 mm
Top bag extension	2200 mm
Side bag extension	650 mm
Walls and roof	insulated panel, 42 mm
Standard RAL colours	9002, 9016, 1021, 3002, 5010, 6005, 7016, 9006, 9007, 9010
Fabric quality Top curtain Side bag rear Side bag front Option wear shield	PVC coated polyester 650 g/m², thickness 0,6 mm 600 g/m², thickness 0,5 mm 2500 g/m², thickness 2 mm 3400 g/m², thickness 3 mm
Fan	230 V, 1-phase, 50 Hz, 250 W noise level: 65 dBA in working position
Operating	switch control included other controls available as option
Temperature range	-30°C to +60°C

Dimensions


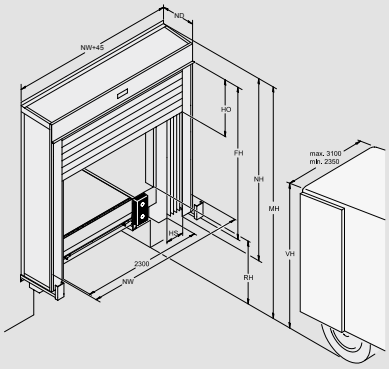


Abb.	Dimension	Value (mm)
NW	Nominal width	3600
NH	Nominal height	3755, 4055, 4355, 4555
ND	Nominal depth	770, 1020
FH	Free height above level*	3300, 3600, 3900, 4100**
HO	Top bag extension	1000, 1300
HS	Side bag extension	650
MH	Installation height	VH+500
RH	Dock height	
VH	Vehicle height	
*	depending on MH (installation height)	
**	maximum sizes	


Fixing points

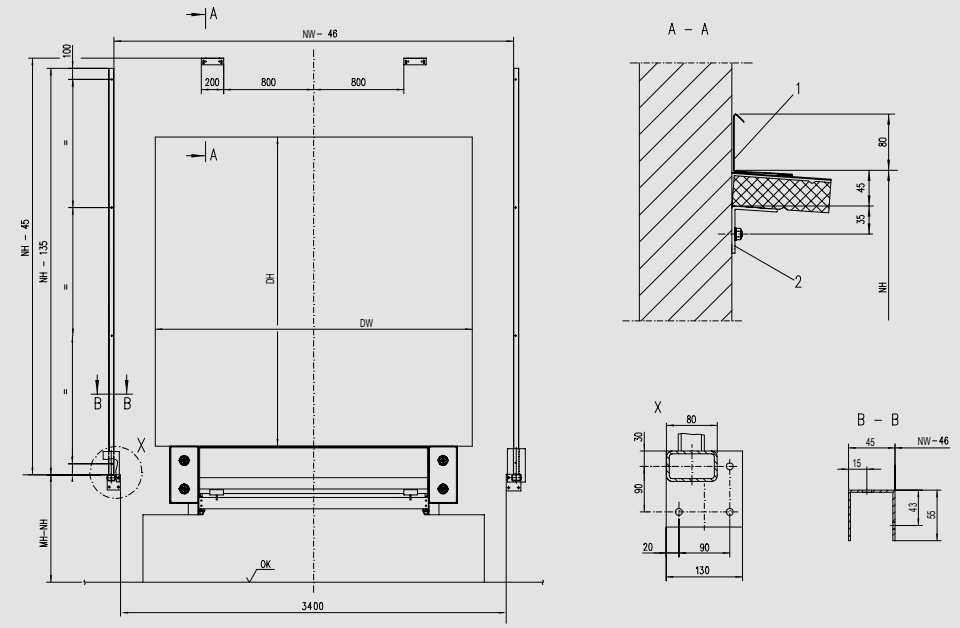

1	Wall mounting profile*
2	Support bracket*

* belongs to the wall fixing

Wall fixings

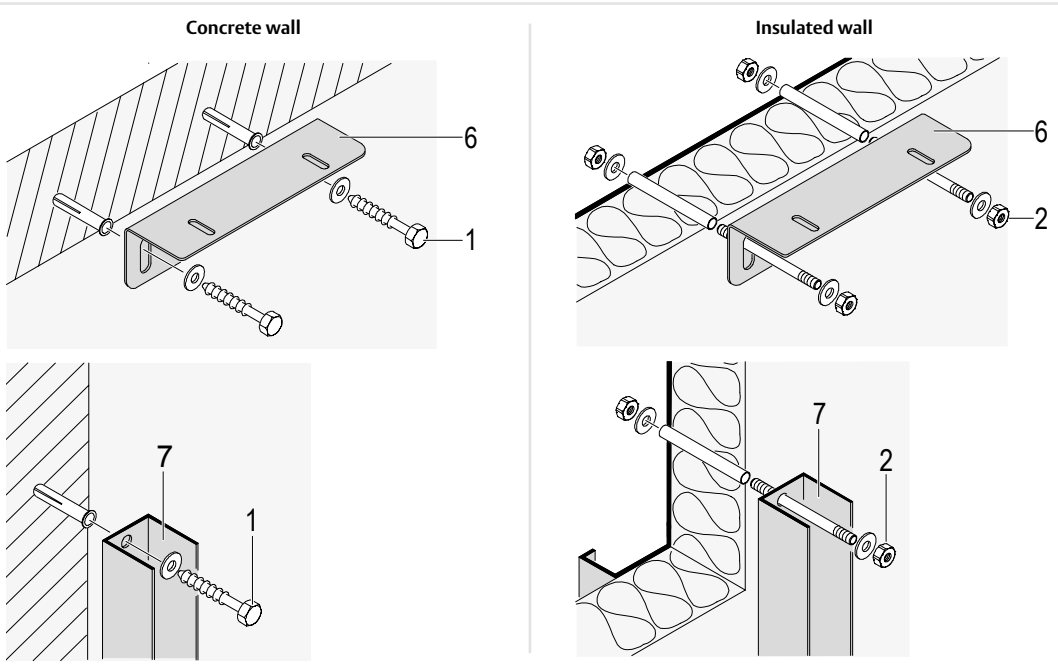

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Loadhouse

Crawford LH6080L

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Heavy duty stand alone loadhouse

The Crawford LH6080L Loadhouse is an independent loading system, containing all the relevant components: leveler, shelter and door.

Together with the Autodock bottom platform and an insulated or non insulated cladding house, a complete, stand-alone dock loading system is formed. Placed outside the door opening of a warehouse or terminal, the operator will gain inside space advantages compared to a conventional, inside docking installation in new as well as in existing buildings without any major building modifications. Due to the thermal separation between building and docking unit, the Load House can be used in temperature controlled applications.

The Crawford LH6080L Loadhouse is the heavy duty version of the new generation of load houses, especially developed to meet all requirements of architects, builders and operators. It is suitable for all geographical areas with snow load up to 2,0 kN/m² and our static calculations are certified by a third party.
The Crawford LH6080L Loadhouse is the safe and reliable choice including ideal support for the construction planning and building permission process.

Same storage area, smaller building
The load house makes it possible to move the actual loading and unloading area outside the building and thereby releasing the corresponding floor area inside.

Better insulation
The Crawford LH6080L Loadhouse also forms a protective barrier between building and vehicle, contributing to energy savings and an improved working environment. Dock levelers and shelters can be integrated with the load house, together forming a complete Autodock® system.


Cheaper construction
As there is no need for complicated concrete pit construction the total cost of the building is reduced.

Technical Data

Normal length[1]	2000, 2450, 3000 mm
Normal width[1]	3300, 3500, 3600, 3750 mm
Thickness of insulation	40 mm
Thickness of material	0,6 mm profiled steel sheet
Surface treatment	hot dip galvanised
Basic wind load	0,84 kN/m²
Basic snow load	2,00 kN/m²
Accumulated snow load	3,50 kN/m²

1) Other sizes on request

Dimensions

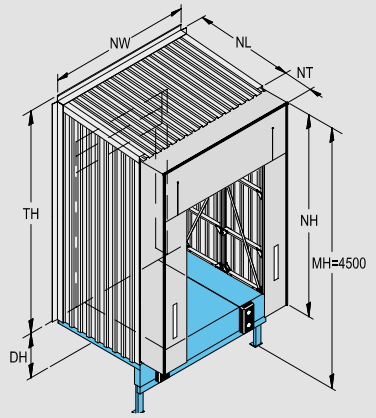

NW	Nominal width (3300, 3500, 3600, 3750 mm)
NL	Nominal length
TH	Total height
DH	Dock height
NH	Nominal height dock shelter
NT	Nominal width dock shelter
MH	Assembly height dock shelter Recommendation: MH = 4500 for lorry-heights up to 4000 mm


		Total Height > TH*		
		NL 2000	NL 2450	NL 3000
DH	950	3845	3875	3925
	1000	3795	3825	3875
	1050	3745	3775	3825
	1100	3695	3725	3775
	1150	3645	3675	3725
	1200	3595	3625	3675
	1250	3545	3575	3625
	1300	3495	3525	3575
	1350	3445	3475	3525
	1400	3395	3425	3475
	1450	3345	3375	3425
	1500	3295	3325	3375

* Measurement only valid for insulated wall setup

For uninsulated wall setup TH is 60mm less.
For steel frame wall setup TH is 180mm less.


When Loadhouse is supplied with rain pipe and gutter add 100 mm.

Cladding types

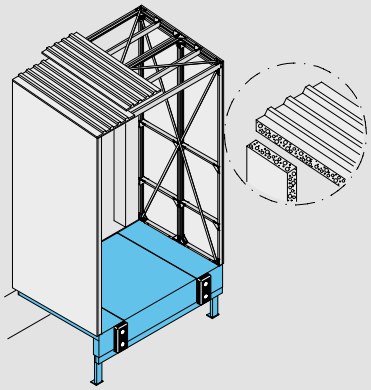


I - Insulated

For optimal insulation the I-insulated type is provided with 40 mm insulated cladding.

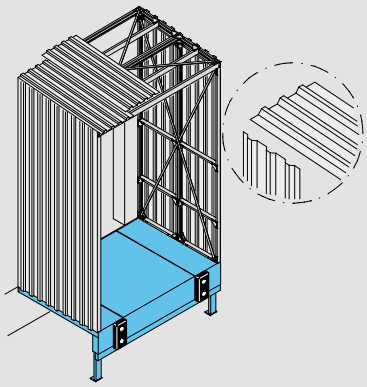

U - Uninsulated


The U-uninsulated type is provided with non-insulated profile sheet material cladding.

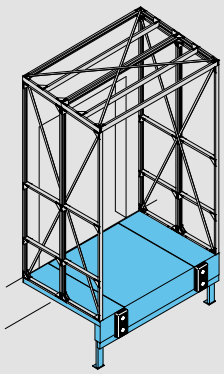

X - Steel frame


For applications where the existing building facade cladding is used, the X-steel frame type is provided with only a steel frame.

Options

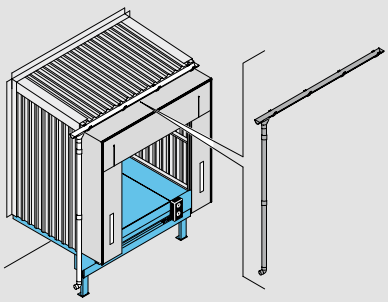

Drain pipe and gutter

To have controlled water drainage, the load house can be equipped with drain pipe and gutter.



Wall profile and water nose

To connect the load house structure to the building, horizontal angle profiles including sealing material can be included in the installation. Water is led off the loadhouse by a water nose on the side.

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.


ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Docking equipment
ASSA ABLOY DE6090DI

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions

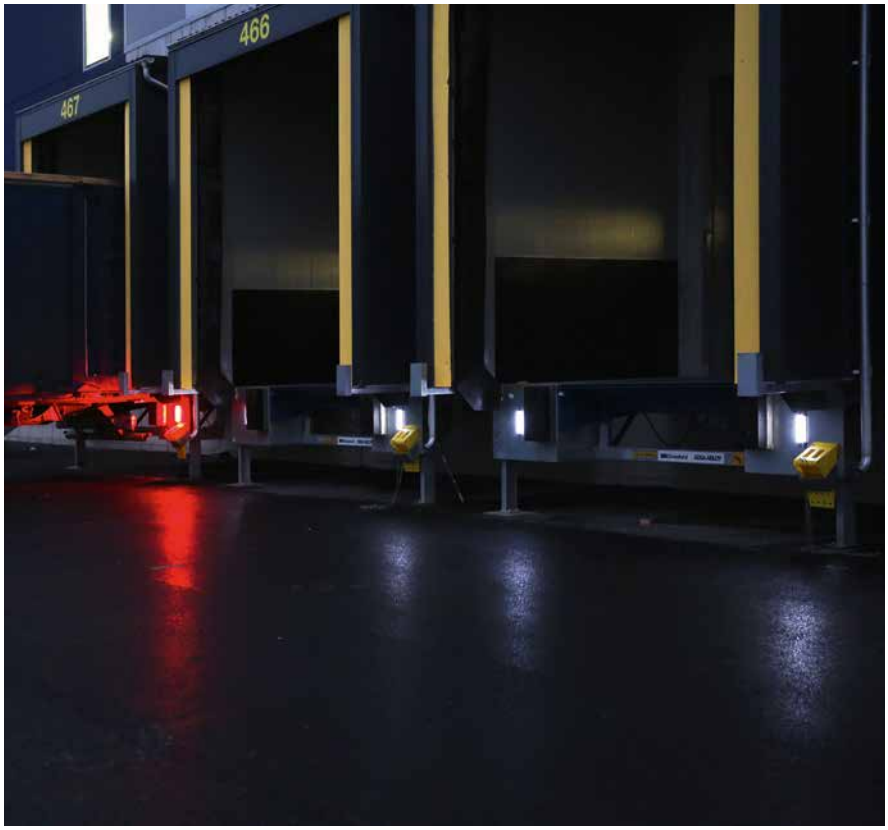

Exclusive and innovative guide- and traffic lights for docking

The ASSA ABLOY DE6090DI Dock-IN from ASSA ABLOY Entrance Systems is the world first combined solution with parking guide- and traffic lights in one system. With ASSA ABLOY DE6090DI Dock-IN you will have a safe and secure docking with help of white guiding lights and red traffic lights.

The white guide lights gives the driver a visual target to align the truck with the docking bay to make approaching the dock easy and safe. Truck drivers look downwards to the rear tires and unlike conventional traffic light systems the red signal of the ASSA ABLOY DE6090DI Dock-IN is in the optimal position below the door. Only when the truck is in place the control box functions are released; the interlocking function “truck in place” helps the operator to save energy and to control the complete loading process. A "reset function" can be created as an additional push button or in conjunction with the 950 Docking Control box system. For increased safety this option gives a signal to the truck driver that he can drive off when the loading process has finished.

With the guide- and traffic lights, there is no need to paint or repaint the guiding lines on the asphalt. There is also no need for conventional parking guides of steel pipes, which are an obstacle on the yard and also when removing snow.

Thanks to modern LED technology, ASSA ABLOY DE6090DI Dock-IN has a low energy consumption and a long lifetime.


Benefits
- The ASSA ABLOY DE6090DI Dock-IN offer much more visual aid than white stripes painted on the asphalt.
- No need to paint and repaint the lines on the asphalt and lines are not hidden by snow.
- No need for conventional parking guides of steel pipes which are an obstacle on the yard and give problems with removal of snow.
- Very low energy consumption and long life time because of modern LED technology.
- Reduces the risk of damage to the docking facility and the trucks.
- Sustainable Safety Solution.
- Green Footprint Solution.
- As a bonus, you get a nicely designed basic lighting in front of the leveler when it is dark outside, which gives the building a nice profile.

Technical Data

Life time	5 years when powered-up at 24H/day
Power of LED’s	2,4 W
Operating voltage	24 VDC
Operating temperature	-20°C to +55 °C
Operating humidity	0-80% rel., not condensing
Degree of protection	IP 66


1) Truck reversing to the dock

Function description
- White LED's left and right are ON
- Additional LED on driver's side OFF
- Control Box is blocked without any visible sign on the Control Box

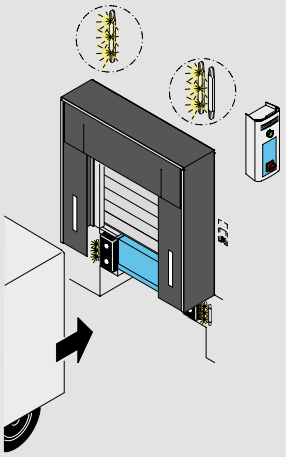


2) Truck arrives at dock / Truck in place

Function description
- Sensor detects the truck
- White LED's turn OFF
- Red LED on driver's side turns ON
- Control Box is released and green LED lamp on the box turns ON

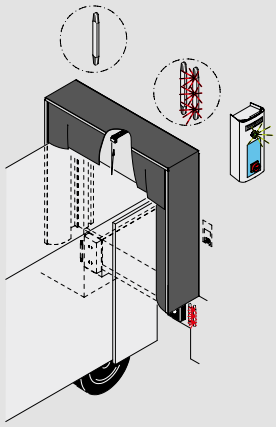


3) Optional Reset Function

Function description
- Function description
- The position "door closed" is transmitted to Dock-IN
- White LED's turn ON
- Red LED turns OFF
- Control box is still released, the green LED lamp on the box stays ON
- Alternatively the "reset function" can be created as an additional push button

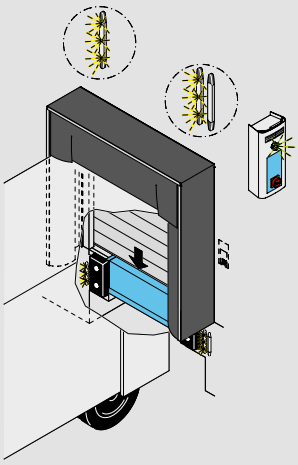

4) Truck drives off

Function description
- Sensor detects truck leaving
- Control Box is blocked and green LED lamp on the box turns OFF
- White LED's turn ON
- Red LED on driver's side turns OFF
- When the optional "reset function" is being used, the external LEDs will not change when the truck drives off

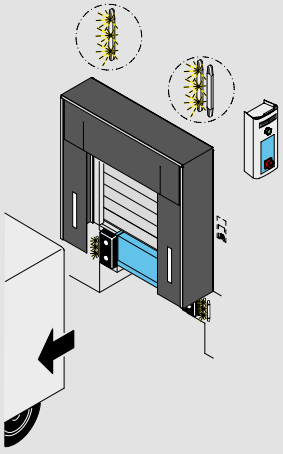

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Docking equipment

ASSA ABLOY DE6090DL

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Unique, energy efficient dock light with a robust design and long lifetime

The ASSA ABLOY DE6090DL dock light heavy duty LED is a unique and innovative product from ASSA ABLOY Entrance Systems. This exclusive product is a convenient, safe and sustainable help when working in and around the docking area. It has a modern, solid and reliable design, and is truly user friendly.

Where dock lights are often a vulnerable object in the docking area, the virtually indestructible ASSA ABLOY DE6090DL dock light heavy duty LED is the perfect solution to bring light in the truck and docking area.

It is designed for the most demanding environments and can withstand possible hard hits from a moving forklift without being damaged.

The housing is made of cast aluminum, combined with a shatterproof polycarbonate lens cover. With a protection class of IP66 it is dust tight and able to withstand water spray. The 18 Watt LED technology gives the ASSA ABLOY DE6090DL dock light heavy duty LED a long life time combined with low energy consumption while providing extensive illumination.


Benefits

- With robust design and material you get less damages and maintenance which means no interuption of the loading process.
- Virtually indestructible lense cover thanks to shatterproof material.
- Dust tight and able to withstand water spray. Is durable for the most demanding working environments.
- Bright and sufficient light in the truck and docking area thanks to powerful illumination. To avoid damages on the vehicle or buildning and better working conditions for staff.
- Energy efficient LED-lamps which means low energy consumption, long lasting lifetime and low operational cost.
- Flexible solid arm that fits every application, for an easy and fast docking process.
- Installation possible with or without arm - suitable for inside installation or outside in loadhouse.
- Modern and solid design. Userfriendly with no special training needed for operation.


Technical Data


Life time	over 60,000 h in typical applications
Power of LED's	18 W
Protection class	IP66
Lens cover	shatterproof polycarbonate
Connection	230 V AC with plug
Cable length	2 m

Standard inside installation with arm

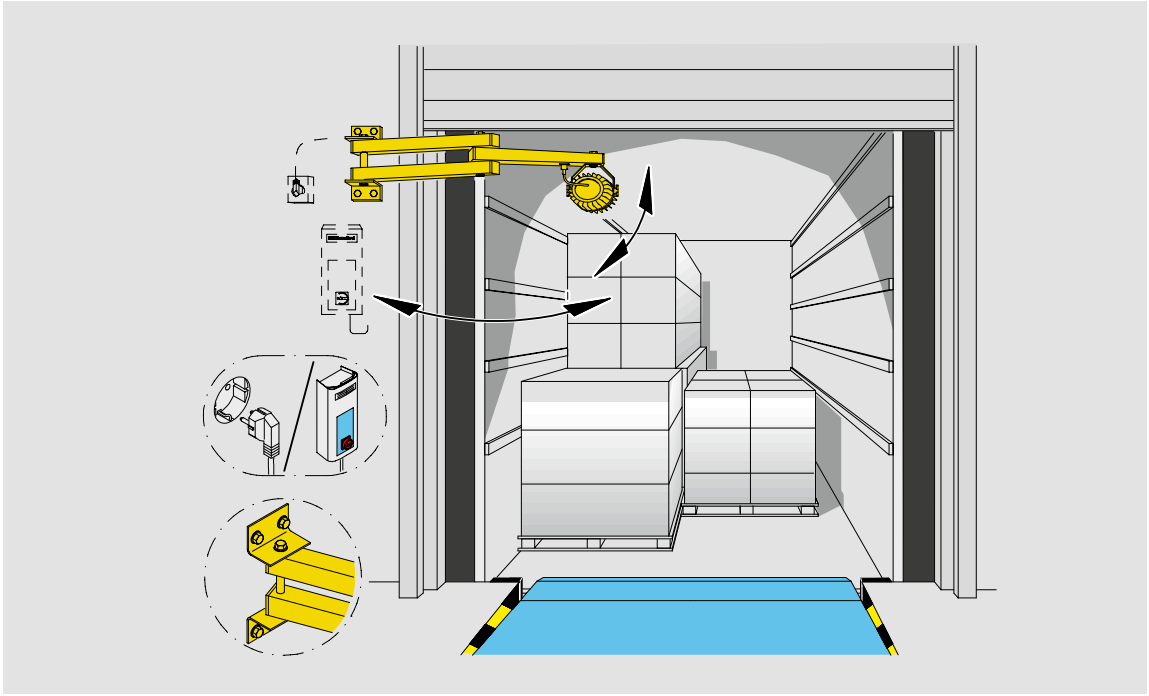

Alternative installation direct to the wall outside in loadhouse

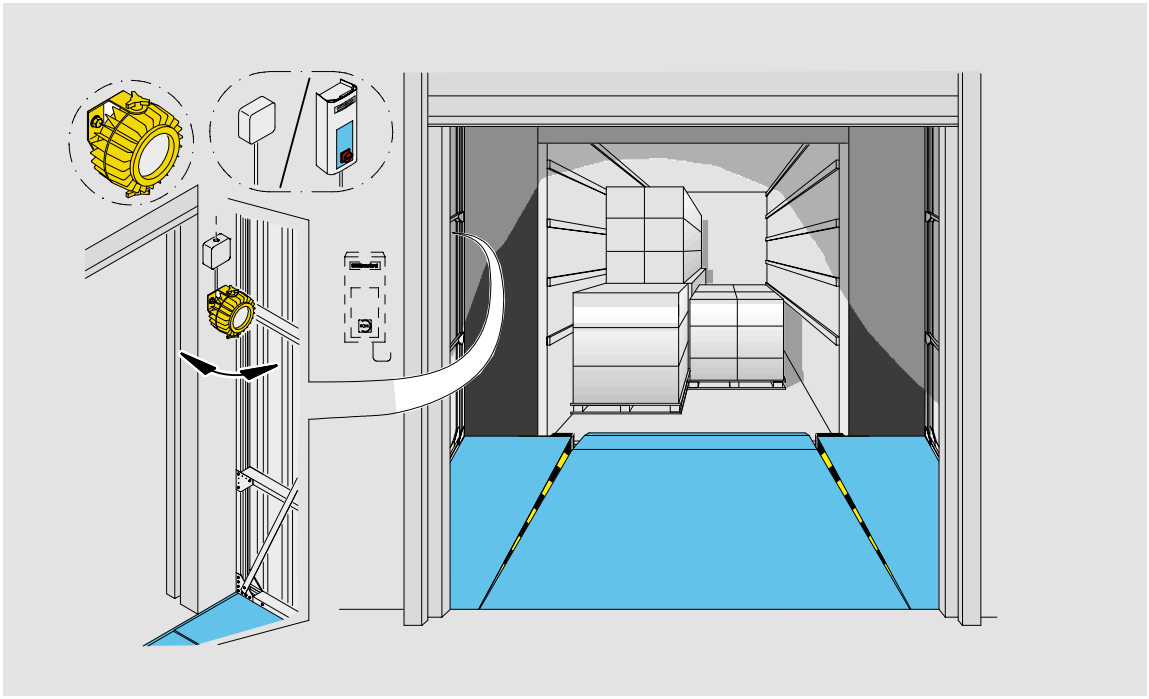

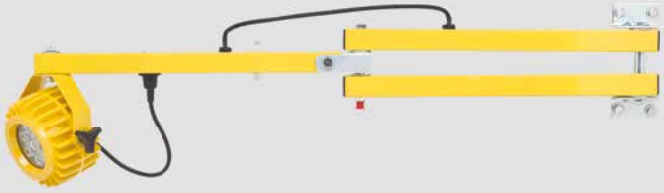

ASSA ABLOY DE6090DL - with arm



Cast aluminium housing

Q2.0-2017 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Looking at lifecycle costs

The initial cost of your doors and docking systems is one you're well aware of. However, it represents only a fraction of the total cost.





Usage costs, service costs and energy costs are also part of your investment over time, and these are the costs preventive maintenance can lower.

Apart from the costs of opening and closing, the largest "hidden" costs are lost energy and lost time. Energy and time are both money to your business, so anything that saves them has an impact on the lifecycle cost of your equipment.

Preventing the unexpected

An important consideration is the replacement of key components before they break. While this costs money, the cost is far lower than that of accidents or emergency repairs.


A door that breaks down may stand open needlessly – wasting more energy than poor insulation. If it cannot be locked, you may need to pay for additional security. And if it disrupts your logistics, it may mean a loss of your business.

In our maintenance checklists, we provide recommendations for proactive replacements. By following them, you give us the responsibility for the safe operation of your equipment, rather than taking it on yourself.

Lifecycle management with ASSA ABLOY Entrance Systems

A Pro-Active Care plan minimizes lost energy, lost time and unexpected hassle, thereby lowering the total cost of your investment. Preventive maintenance is one aspect, but so is having a dedicated partner who can service all your doors when problems arise.

We ensure the continuous performance, safety and convenience of your doors and docking systems, throughout their operating lifetime. And by combining Pro-Active Care with upgrades and modernization, we can extend the life of your equipment.

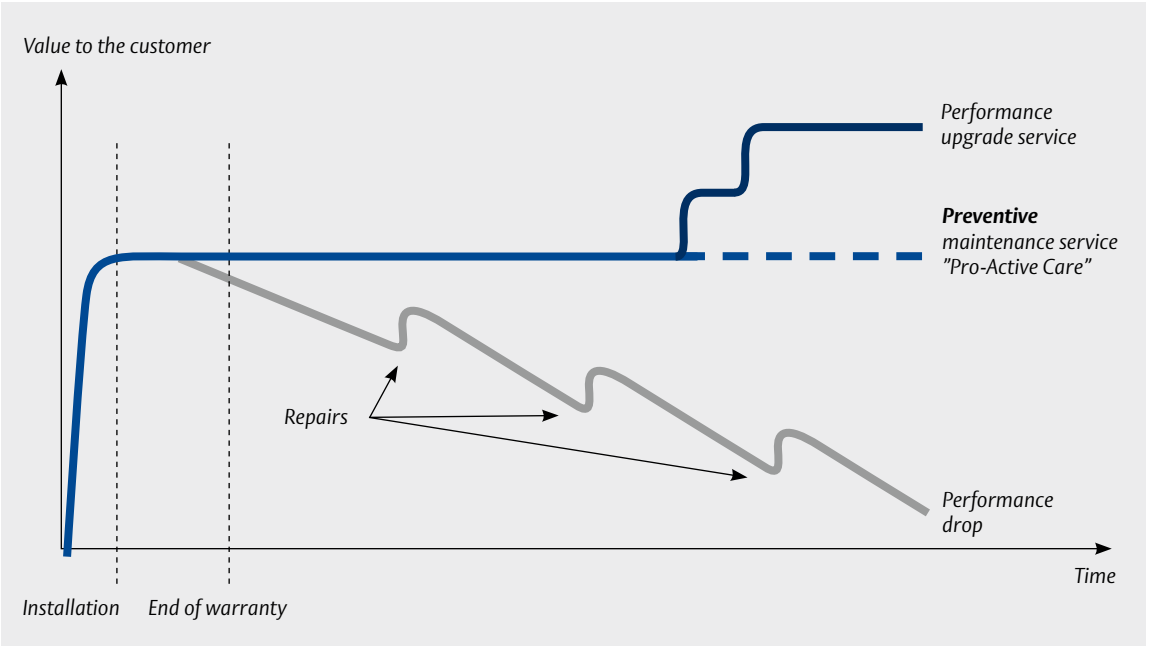

Effective lifecycle management enhances the performance of your automatic entrances.

Our maintenance makes your entrances more sustainable

Regular maintenance doesn't just ensure top equipment performance. It also extends the life of your doors and docking systems, and it reduces their impact on the environment.

Having fewer breakdowns contributes to a more stable interior climate, with energy losses kept to a minimum. And because our professional technicians service all types of doors, you can receive visits from one provider rather than several. That, along with the fact that we solve most problems on the first visit, means reduced emissions from service vehicles.

"If all suppliers provided service, statistics and follow-up like ASSA ABLOY Entrance Systems, my job would be much easier."


Site manager, Coor FM

"With carefully selected docking solutions and knowledge of how we avoid energy losses, we have been able to reduce our energy consumption while minimizing the risk of condensation. This, along with high quality, is more important than low investment costs for an installation."

SydGrönt AB

Automatically Green
For external entries to climate-controlled buildings, automatic doors are a greener option than manual doors. Only open when actually in use, they reduce the amount of energy needed to heat and/or cool the building.

Maintenance & Modernization
Regular maintenance and modernization ensures that your equipment operates reliably and efficiently for consistent, sustained energy savings.

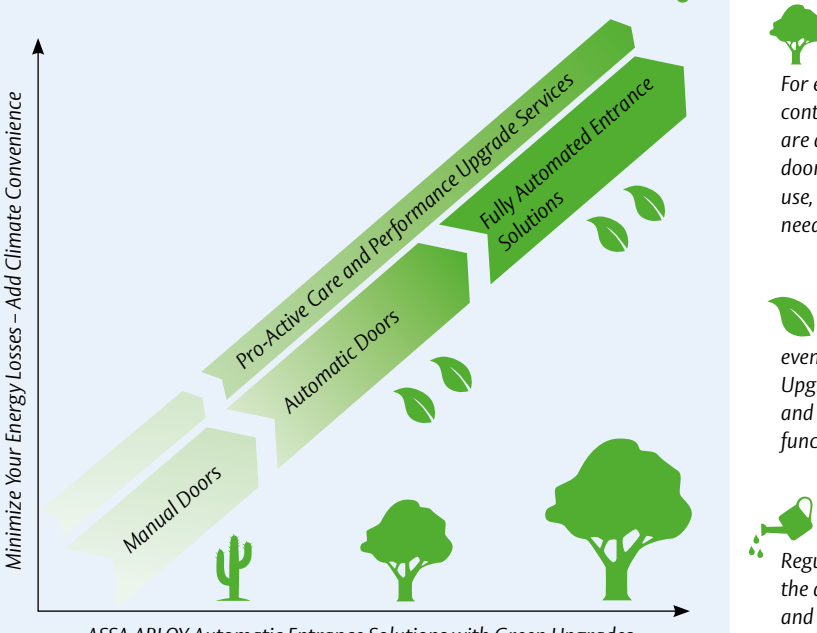

Automatic Entrance Solutions
For external entries to climate-controlled buildings, automatic doors are a greener option than manual doors. Only open when actually in use, they reduce the amount of energy needed to heat and/or cool the building.

Green Upgrades
Automatic entrances can be made even more energy-efficient with Green Upgrades like sensors, air curtains and other equipment with adjustable functionality.

Pro-Active Care
Regular maintenance ensures that the automatic doors operate reliably and optimally for consistent, sustained energy savings.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our globally recognized product brands Besam, Crawford, Megadoor and Albany, we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations.
ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

ASSA ABLOY

ASSA ABLOY Entrance Systems

assaabloyentrance.com

EM1706V3F