# Vertical lifting fabric door

## Crawford VL3010

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions




## Large size vertical lifting fabric door

The Crawford VL3010 vertical lifting fabric door is especially designed for industrial environments where doors are exposed to moisture, dust and very high or low temperatures, or where the door opening is large.

The unique design and structure offers durability, tightness, energy efficiency, operational reliability and minimum maintenance. Every door is individually designed to meet application requirements, for example high wind load.

The main advantages of the unique Crawford VL3010 are:
- Robust design
- Operational reliability
- Low maintenance cost
- Well sealed
- Flexible design
- Suitable for tough industrial environment
- Top-class safety and quality
- Automatic door control

**Resistant to damage**
- Thanks to the flexible design, minor collisions do not cause permanent damage.
- There are no hinges, springs, cables or couplings that can be damaged if anything collides with the door.

**Withstands high wind loads**
- By designing the door leaf with a suitable number and type of intermediate beams, the Crawford vertical lifting fabric door can be dimensioned to withstand high wind loads.

**Extreme weather has no influence**
- The Crawford vertical lifting fabric door is made of highly durable materials that easily cope with temperatures from -35°C to +70°C.
- The reinforced, UV-resistant, flame-resistant door fabric is protected against mildew and rot.

## Technical Data

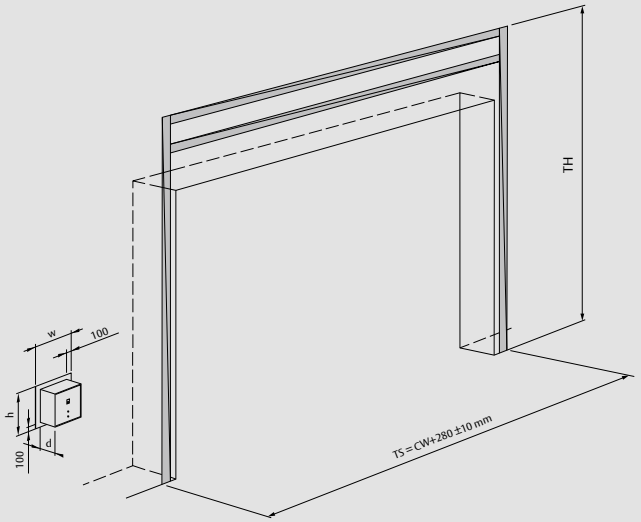
| | |
|---|---|
| Max size (W / H)[1] | 8000 / 12000 mm |
| Door leaf thickness | 100 mm |
| Guide rails material | aluminium |
| Vision panels | optional |
| Wind load resistance[2] (differential pressure) | 0.7-1.6 kPa depending on size (class 3-5, EN 12424) |
| Sound reduction (standard) | 15 dB Rw (ISO 717) |
| Water resistance, EN 13241 | class 3 |
| Air permeability, EN 12426 | class 2 |
| Thermal transmittance, EN 12428 | depending on door size, specific data on request |
| Normal opening speed | 0,2 - 0,3 m/s |
| Increased opening speed | 0,4 - 0,6 m/s |
| Operating environment temperature range | -35°C to +70°C |

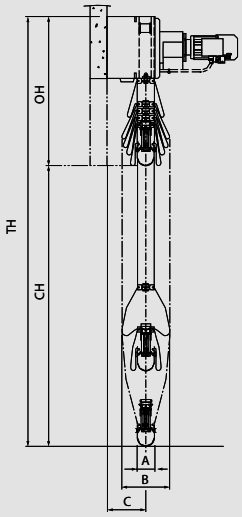
1) Other sizes on request 2) Higher wind load classification on request

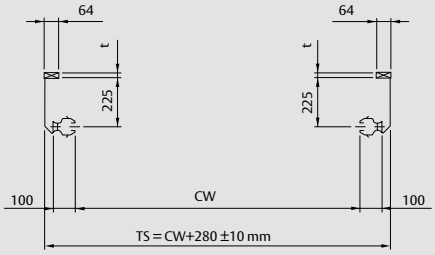



NIHVA

# Dimensional specifications




A = 100 mm
B = 400 mm
C = 225 mm

TH = 1,05 x CH + 840 mm

CH = $\frac{\text{TH -840 mm}}{1,05}$

| | |
|---|---|
| TH | Total height |
| CH | Clear height |
| OH | Over height |
| TS | Total space requirement |
| TW | Total width |
| CW | Clear width |
| MD | Motor depth |
| A | Door leaf thickness |
| B | Minimum free space required for fabric folding |
| C | Distance from rear side of header box to guide rail centre |

# Options

**Vision Panels**
Vision panels (windows) are available for the standard and arctic fabrics to improve light admission and visibility through the door leaf. The vision panels are available in four different sizes.

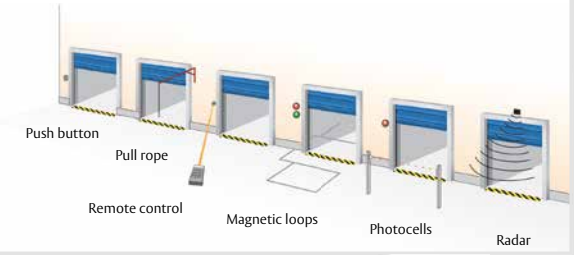
**Arctic Fabric**
The arctic fabric replaces the standard fabric in environments where the temperature can be as low as -45°C. It is only available in blue (RAL 5010).

**Sound-reduction Fabric**
The sound-reduction fabric is for use in environments where the transmission of sound through the door must be reduced. It is installed on both sides of the door leaf.

**Security Fabric**
The security fabric is for use in environments where security is important. It is similar to the standard fabric with the addition of galvanized steel wires inside the fabric. It is installed on both sides of the door leaf behind the standard fabric.

**Heat-resistant Fabric**
The heat-resistant fabric replaces the standard fabric on the inside of the door leaf when there is a requirement to contain heat and/or chemical hazards. It is available with three different coatings dependant on the environment where it is going to be used.

# Access and automation




# Standard available colours

| | | | |
|---|---|---|---|
| Beige RAL 1001 | Signal red RAL 3001 | Fir green RAL 6009 | Anthracite grey RAL 7016 |
| Signal blue RAL 5005 | Signal grey RAL 7004 | Traffic white RAL 9016 | Translucent white |

ASSA ABLOY, Besam, Crawford, Megadoor and Albany, as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Technical data subject to change without notice. © ASSA ABLOY Entrance Systems AB Q2.0-2014