Overhead sectional door

Crawford OH1042F

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



The next generation of overhead sectional doors

Modern, robust and flexible, the new Crawford OH1042F from ASSA ABLOY Entrance Systems is designed to keep your business moving – for all duties and in all weathers. Filled with innovation, and superbly well insulated, this rugged, attractive overhead sectional door gives you the highest number of options at the lowest possible running cost. It's the perfect choice for warehouses, logistics centers and all kinds of business premises.

Each part of the Crawford OH1042F overhead sectional door is built to the highest standards. Wind-resistant reinforced panels, joints designed for better load distribution, and butyl sealing with unbroken corners for maximum tightness, all add up to a door that looks better and performs longer.

Choosing from nine standard outdoor colors, or your own factory painted color for both the inside and outside. Available with different sizes, panels, window configurations, locks, handles and pass doors, the Crawford OH1042F overhead sectional door is perfectly suited to every kind of industrial need.

Windows or sandwich panel
The modular design of the Crawford OH1042F gives the freedom to make a specific configuration suitable for every situation.

Pass-door option
The pass-door width is 900 mm, satisfying today's market demands. This low threshold pass-door is designed with a sturdy, wide aluminum profile of only 30 mm. The profile gives an unobstructed passage and is ribbed, minimizing the risk of slipping.

Standard colours
The inside and outside standard colour of the Crawford OH1042F overhead sectional door is anodised aluminium. Next to this there are 9 pre-coated outside colours available.


Technical Data

Standard size up to (W x H)[1]	7250 x 6050 mm
Frame thickness	44 mm
Filling thickness	27 mm
Bottom section thickness	42 mm
Windows	various options available
Pass-door	optional
Access and Automation	optional
Wind load, EN 12424[2]	class 3
Thermal transmittance, EN 12428[3]	3.6 W/m²K
Water penetration, EN 12425[4]	class 3
Air permeability, EN 12426[4]	class 2

1) Other sizes on request 2) Without pass-door. Higher wind load classification on request 3) Door size 5000 x 5000 mm, double glazing without pass-door 4) Without pass-door

NIHVA

Dimensional specifications

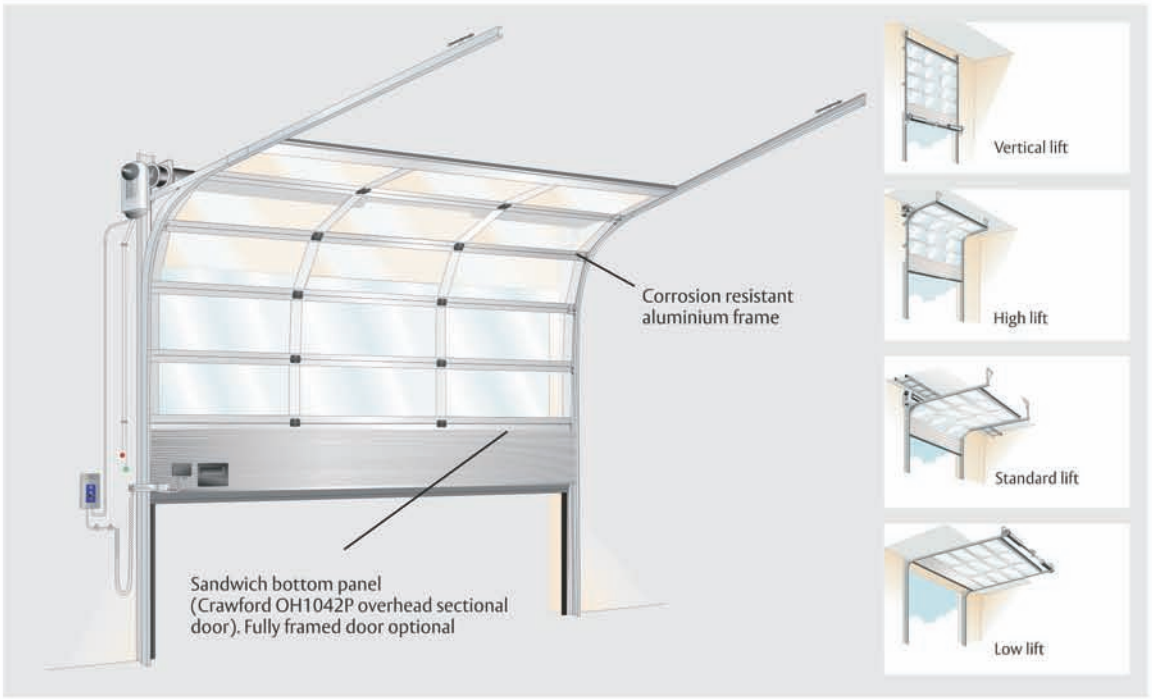

Panel options



Low threshold pass-door
The 900 mm wide low threshold pass-door is designed with a sturdy and wide aluminium bottom profile of only 30 mm. The profile gives an unobstructed passage and is ribbed, minimizing the risk of slipping.



Normal pass-door with 180 mm threshold
The pass-door is constructed with a Crawford OH1042P bottom section and bottom seal. A reinforcement truss ensures the door's sturdiness and resistance to wind load.



Windows
Different types of windows in single or double acrylic (frosted or tinted) or hardened glass are available.



Frame door with pane fillings in bottom section.



Fully glazed frame door.


Options access and automation



Assisted manual operation
Two different types of chain hoist are available, depending on door weight.



All manual Crawford doors can be upgraded with electric operators and automation.

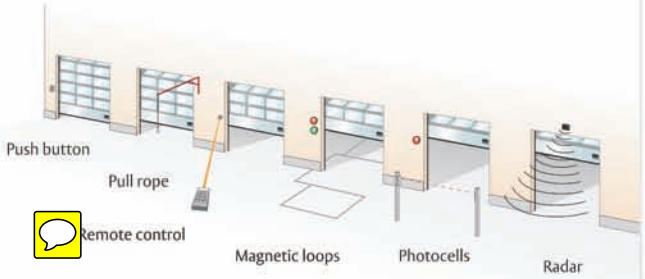



Cylinder locks
Complete lock including handle and cylinder for both sides or only inside.

Inside Outside

Standard available outside colours

Yellow RAL 1021	Blue RAL 5010	Anthracite grey RAL 7016	Light grey RAL 9006	White RAL 9010
Red RAL 3002	Green RAL 6005	Grey white RAL 9002	Aluminium grey RAL 9007	Other colours

© ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.
Q4.0-2015

NIHVA
NIHVA Technologies Pvt. Ltd.

G-Block, 1st Floor, Thermax Chowk, MIDC, Above Renault Showroom, Chinchwad, Pune - 411019
+91 2066 3040 33 +91 85 51091 333 sales@nihva.com www.nihva.com