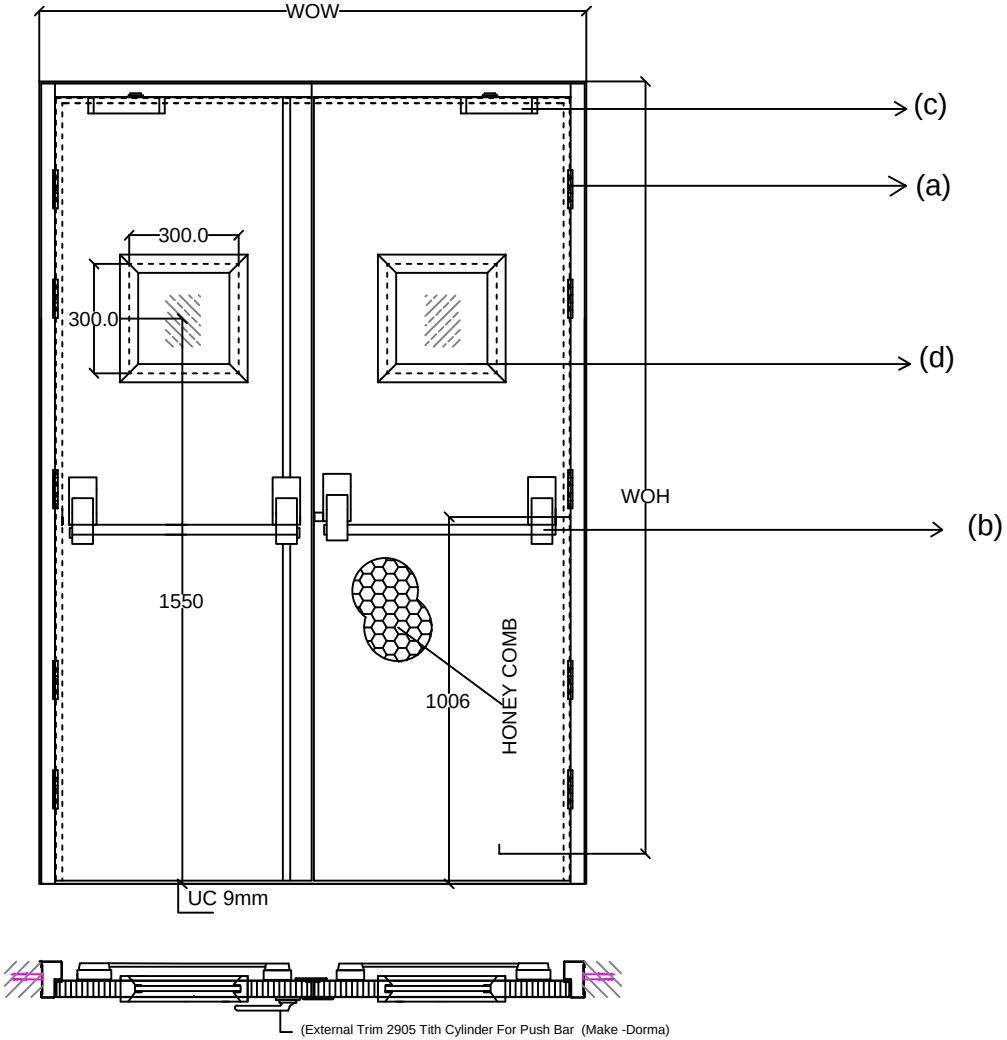


Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

ASSESORIES DETALES

(a) HINGES: 10 No. SS Ball bearing butt hinges 100x75x3mm


(b) LOCK : PHCR 1000 series puch bar (Make Dorma)
PHCR 1000 series puch bar vertical Bar (Make Dorma)

(c) DOOR CLOSER: 2 No. Door Colser TS 71 with std arm (Make Dorma)

(d) GLASS : Clear fire Vision Glass Clear 6mm of size 300x300mm.

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Soliid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

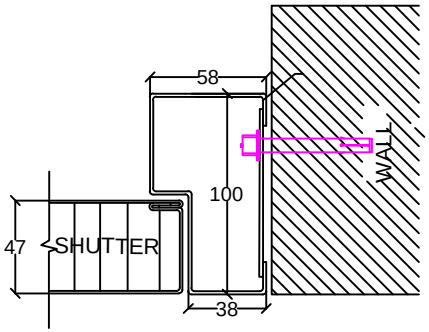

FIRE DOOR SIZES

SR.NO	WOW	WOH	QUANTITY
1	1500	2400	6
2	1500	2800	8
3	1500	2150	4
4	1500	2900	5
5	1500	2000	1
6	1500	2650	2

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

Fire Door

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	23/01/16	
CHECK	ANIL	23/01/16	
REV.	01		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - SYNEFRA
PROJECT - LUPIN
SITE - SUS-PUNE
DWG. NO. - NIHVA/15-16
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com