# High performance door
# Albany RR300

ASSA ABLOY

## ASSA ABLOY Entrance Systems

The global leader in
door opening solutions



# Albany RR300

- Modular system allows custom configurations
- Fast opening and closing speed saves energy costs
- Space saving construction for almost unlimited possibilities of installation
- Fast and simple installation
- Maintenance-friendly design resulting in minimal service costs

## DOOR DESIGN

| Type | Design |
|---|---|
| Albany RR300 S | Galvanized Steel |
| Albany RR300 I | Stainless Steel |
| Albany RR300 Mini | Galvanized Steel, Stainless Steel |

## DOOR CURTAIN

All doors are available with clear PVC door curtain with coloured reinforcement stripes. Alternatively economic door curtain as Travitop, sturdy RollTex® (standard by Mini) or NomaTex® can be delivered.

## COLOURS

Basic colours of reinforcement stripes are red or blue.

A large variety of other colours on request such as orange, grey, yellow, beige, green, white.



## WINDOWS

For door curtain made from clear PVC with coloured reinforcement stripes big visible areas are available.

Options for other types of curtain vision panels or windows can be delivered.




## ACTUATORS

Individual applications can include additional safety devices. Actuators such as infrared, radar detectors, push buttons, vehicle detector loops or radio transmitters can be added to the control system. Please contact us for additional information for your specific needs.

## KNOCK-OUT CAPABILITY

For doors from width ≥ 1300 mm a knock-out capability is available. This allows non –operation times after crash and it can easy manual reset after an impact.

Not applicable in version “Mini” with low bottom profile for reduced installation height.






## SAFETY FEATURES

The door has an electrical safety contact edge. A door line photocell also prevents the door closing when objects or people are in the doorway.



ASSA ABLOY, Besam, Crawford, Megadoor and Albany, as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies within the ASSA ABLOY Group.

## TOP ROLL

As Standard aluminium roll with galvanized shafts.

As Option aluminium roll with shafts and bearing in stainless steel or top roll and shafts made from stainless steel.

## TOP ROLL COVER

Standard door is delivered without top roll cover

As option top roll cover can be chosen from:

• Galvanized steel • Stainless Steel • Stainless Steel with 30° decline

## MOTOR COVER

Standard door is delivered without motor cover

As Option, motor cover can be choosen:

- Powder coated steel
- Stainless steel 15° decline
- Plastic grey RAL 7040

not available for hand chain operator



## MOTOR

Gear motor with drop down safety gearbox, available left or right hand side. Not necessary in version “Mini” because of the lower door curtain weight.

## CONTROL BOX

As standard the door is made of a relay control system MCS-R.

According to the operation conditions optional a contactor control system ACS 50 and a frequency converter control system MCS-FC and MCC are available. With the basic control system MCS-R and MCS-FC a convenient operation with high flexibility, fast start-up and easy handling of the door is allowed. The powerful MCC frequency converter control system with Torque Vectoring of the drive unit, connected to the wide range of functions, enables nearly an unlimited use of the door. The MCC guarantees a soft start, optimal increase in speed, maximum speeds and a long service life of the door.

Figure shows MCC control system.






## BOTTOM PROFILE / FLEX EDGE

The bottom profile made from aluminium or stainless steel can be chosen. A low bottom profile for doors with reduced space requirement over lintel is available (only for Mini and only aluminium).

One further option is our Flex Edge Version (flexible bottom profile without aluminum extrusion and coiled cable).



# High performance door Albany RR300

## ADVANTAGES OF ALBANY RR300

- Modular system allows custom configurations
- Fast opening and closing speed saves energy costs
- Space saving construction for almost unlimited possibilities of installation
- Fast and simple installation
- Maintenance-friendly design resulting in minimal service costs

## APPLICATION

- Interior
- Hygienic environments
- Machine Protection
- Various manufacturing and materials handling applications

## DESIGN

The door is based on a modular system that allows custom individual configuratons.

## VARIOUS DOOR CURTAINS

Depending on the individual application different options of door curtains are available. Clear PVC material or more durable curtain material.

## MANUAL ACTIVIATION

The door can be operated manually with a crank in the event of a power failure. Alternatively an hand chain operator is available (not available with drive cover).

## FLEX EDGE

One further option is our Flex Edge Version (flexible bottom profile without aluminum extrusion and coiled cable).

## SAFETY FEATURES

The door is designed according to the Workplace Directive of the UVV regulations and the harmonized CE Guidelines including the EN 13241-1.

## INDICATION OF RISK

The safety of the door is designed for normal use and for vehicles in an industrial environment corresponding to the harmonized CE-Guidelines. In consideration of the on site situation – especially in case of pedestrian use – additional safety measures, such as additional actuators may be required. In addition, special environmental conditions may impact the choice of door type. For more information or to schedule an on-site inspection, please contact our sales engineer.

| **TECHNICAL DATA** | **Albany RR300 Standard 300 S, 300 I** | **Albany RR300 Mini** |
|---|---|---|
| **Interior door** | suitable | suitable |
| **Exterior door** | partially suitable | not suitable |
| **Wind resistance** (EN 12424) | class 1 | class 0 |
| **Door dimension (mm)** | Standard with MCS-R<br>Optional with ACS 50 | Standard with ACS 50 |
| (DW min./max.)<br>(DH min./max.) | 1000 / 3500 mm<br>1000 / 3500 mm | 500 / 2000 mm<br>500 / 3000 mm |
| **Door dimension (mm)**<br>(DW min./max.)<br>(DH min./max.) | Optional with MCS-FC<br>1000 / 3000 mm<br>1000 / 3500 mm | |
| **Door dimension (mm)**<br>(DW min./max.)<br>(DH min./max.) | Optional with MCC<br>1000 / 4000 mm<br>1000 / 4200 mm | |
| **Surface** (alternatively) | | |
| Side frame, galvanised steel, stainless steel | • | • |
| Bottom profile | • aluminium, stainless steel | • aluminium |
| Bottom profile Flex Edge | • | – |
| **Knock-out capability** | • / for DW ≥ 1300 | – |
| **Covers** (alternatively) | | |
| Top roll cover [1] | • | • |
| Motor cover [1] | • | • |
| **Door curtain** (alternatively) | | |
| PVC with coloured reinforcement stripes | ✓ | • |
| PVC with silicon free reinforement stripes | • | • |
| RollTex® Plus* | • | ✓ |
| RollTex® Original (fine)* | • | • |
| NomaTex® */** | • | • |
| NomaTex® flame retardent | • | • |
| Travitop 1,3 mm **<br>(max. 3500 x 3500 mm) | • | • |
| * optional with windows | • | • |
| ** optinal with vision panels | • | • |
| Extended flexible seal | • | • |
| **Wind tabs** | ✓ | ✓ |
| **Safety** | | |
| Electrical safety contact edge | ✓ | ✓ |
| Door line photocell | ✓ | ✓ |
| Fall down protection | ✓ in drive unit | not required, curtain weight below 20 kg |


| **Control Unit** | **Albany MCS-R** | **Albany MCS-FC** | **Albany ACS 50** | **Albany MCC** |
|---|---|---|---|---|
| Albany RR300 Standard 300 S, 300 I (Standard/Option) | ✓ | • | • | • |
| Albany RR 300 Mini (Standard/Option) | - | - | ✓ | - |
| Speed (m/s) Open/close to max. | 1,0/1,0 | 1,25/1,0 | 1,0/1,0 | 2,2/1,0 |
| Max. allowed cycle times (1/min.) | 0,5 | 1 | 1 | 3 |
| Protection | IP 54 | IP 54 | IP 55 | IP 55 |
| Motor power | 0,65 kW | 0,75 kW | 0,75 kW | 0,75 kW |
| Power supply | 3/(N)/PE AC: 400V 50Hz | 1/N/PE AC: 230V 50/60Hz | 3/(N)/PE AC: 220/230/380/400/415V 50Hz | 3/(N)/PE AC: 380/400/415V/440/480V 50/60Hz |
| Power supply with additional transformer | - | - | 3/(N)/PE AC: 440/480/500V 50Hz | 3/(N)/PE AC: 220/230/500V 50/60Hz |
| Fuse protection by customer | 10 – 16A C-characteristic[3] | 16A C-characteristic[3] | 16A C-characteristic[3] | 10 – 16A B or C-characteristic[3] |
| Potential free contacts max. 250 V | ✓ | ✓ | ✓ | • |
| Traffic light function without direction detection | ✓ | ✓ | ✓ | ✓ |
| Traffic light function with direction detection | • | • | - | ✓ |
| Flashing alarm light | ✓ | ✓ | ✓ | ✓ |
| Error message | plain text | plain text | LED | plain text |


• Option ✓ Standard – not possible


[1] For doors of height ≤ 2500 mm the use of top roll and motor cover is required according to standard EN 13241-1.
[2] Not in combination with knock-out capability. [3] or comparable

# General drawing Albany RR300


only for Albany MCC

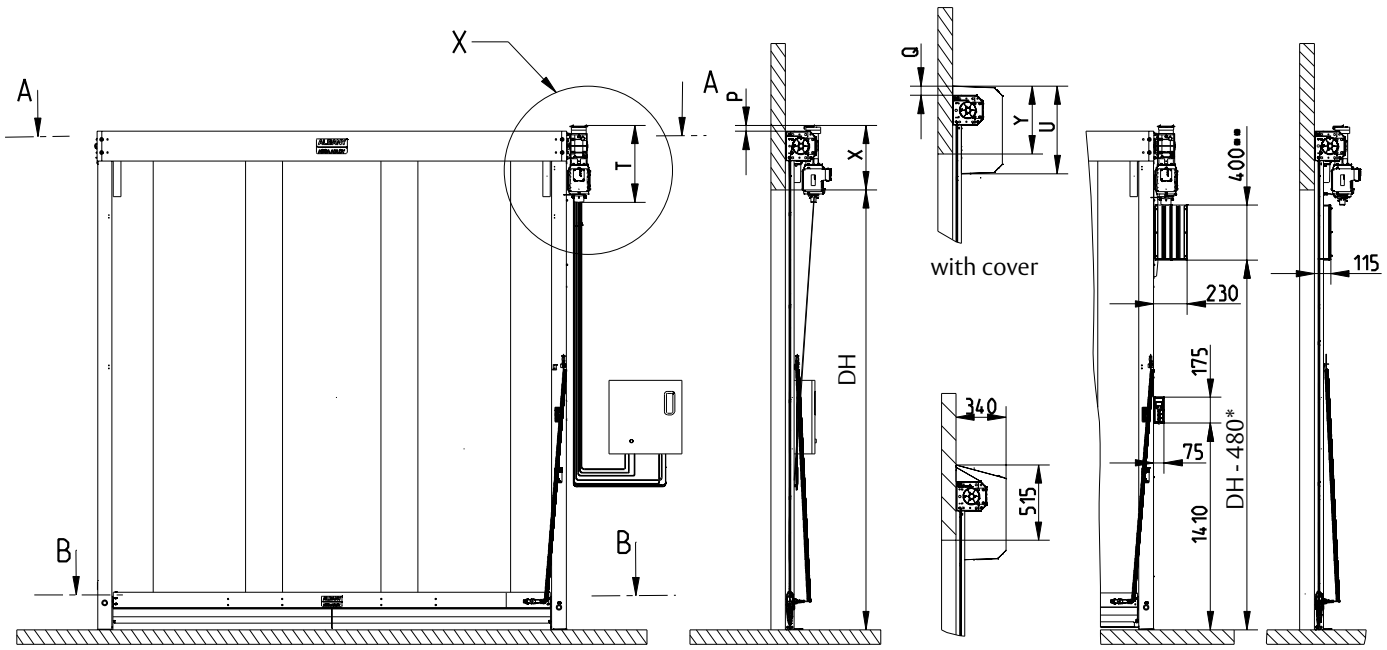

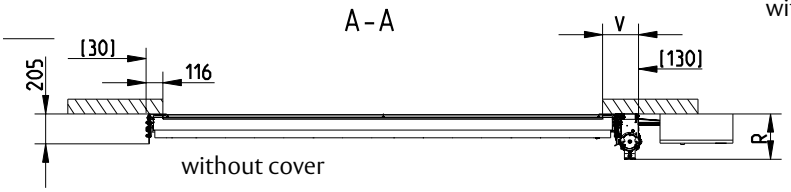
only for MCS

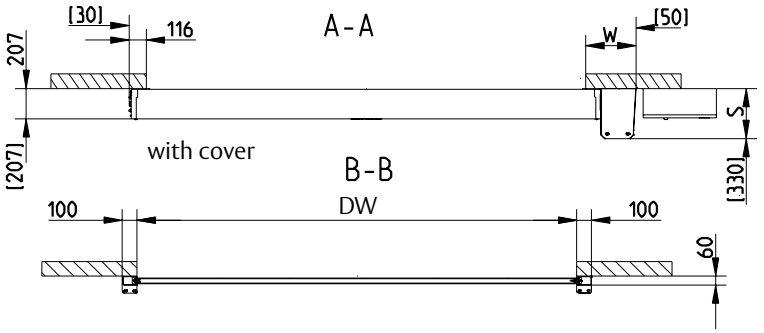


| Without motorcover | | | | |
|---|---|---|---|---|
| | Standard | | | Mini |
| | Albany MCC | Albany ACS 50, without control, MCS-FC | Albany MCS-R | Albany ACS 50, without control |
| X | 440 | 440 | 400 | 353 |
| V | 265 | 265 | 245 | 220 |
| R | 315 | 315 | 240 | 260 |
| T | 550 | 520 | 415 | 323 |
| P | 42 | 42 | 0 | 0 |

| With motorcover | | | | |
|---|---|---|---|---|
| | Standard / Mini | | | only Mini |
| | Plastic | Steel | Stainless steel 15° | Steel ACS 50, without control |
| Y | 470 | 465 | 515 | 357 |
| W | 346 | 342 | 342 | 235 |
| S | 340 | 340 | 340 | 270 |
| U | 610 | 600 | 650 | 380 |
| Q | 70 | 65 | 115 | 0 |

| Available sizes | | DW | DH |
|---|---|---|---|
| Standard | min.* | 1000 | 1000 |
| | max.** | 4000 | 4200 |
| Mini | min.* | 500 | 500 |
| | max.** | 2000 | 3000 |
| *Crash | min.:* | 1300 | 1000 |
| ** Top 0,8 mm | max.: ** | 3000 | 3000 |
| ** Albany ACS 50, Top 1,3 mm | max.: ** | 3500 | 3500 |
| ** Albany MCS-R | max.: ** | 3500 | 3500 |
| ** Albany MCS-FC | max.: ** | 3500 | 3500 |

[ ] = Space needed for installation


Zg.-No. 8300R0009/I
Date: 24.11.2014

| Control Unit | | | | | |
|---|---|---|---|---|---|
| | | Albany ACS 50 | Albany MCC | Albany MCS-FC | Albany MCS-R |
| Dimensions W × H × D | mm | 300 × 400 × 210 | 220 × 380 × 100 | 215 × 345 × 140 | 215 × 345 × 140 |
| Dimensions frequency converter W × H × D | mm | | | 106 × 355 × 106 | |

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our globally recognized product brands Besam, Crawford, Megadoor and Albany, we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations.
ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

assaabloyentrance.com

# Fixing plan Albany RR300

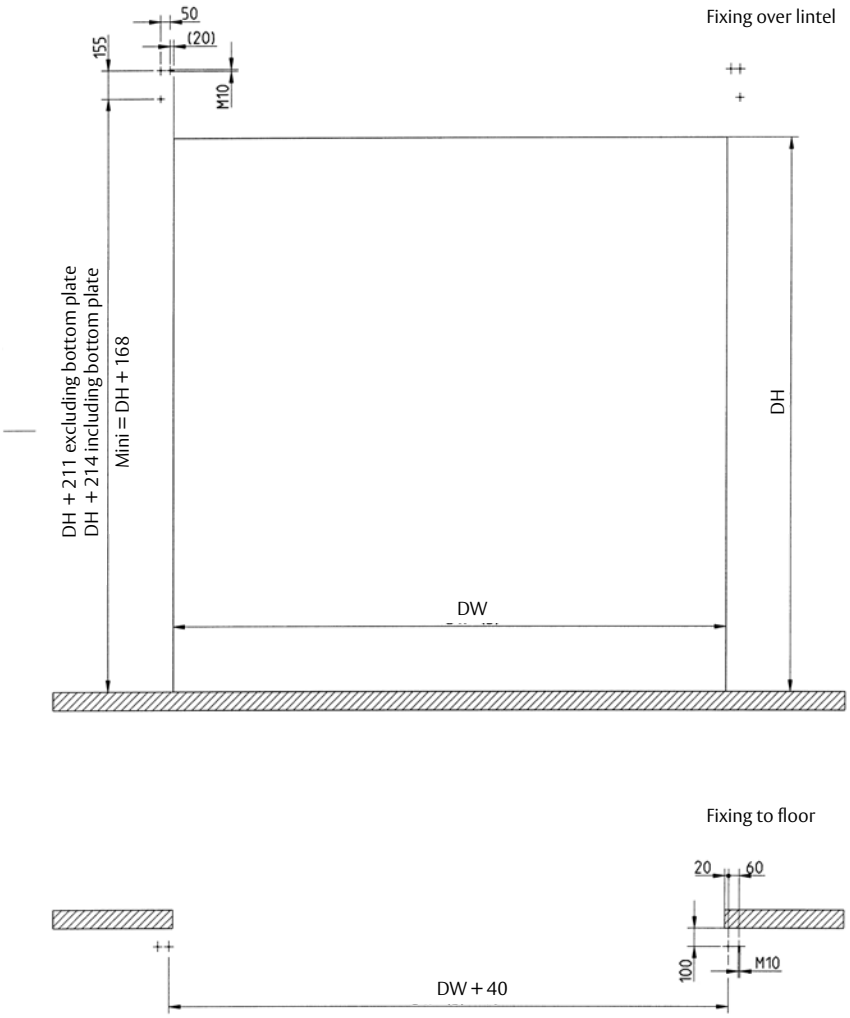


8300R00010/c
Date: 02.06.2008

ASSA ABLOY Entrance Systems

info.aaes@assaabloy.com
assaabloyentrance.com

Follow us:

Please enter *ASSA ABLOY Entrance* in the channel's search field.

Technical data subject to change without notice

© ASSA ABLOY Entrance Systems AB PL.MAN/Albany RR300/DEU.EN-1.1/1503 / 64 05R 0981