


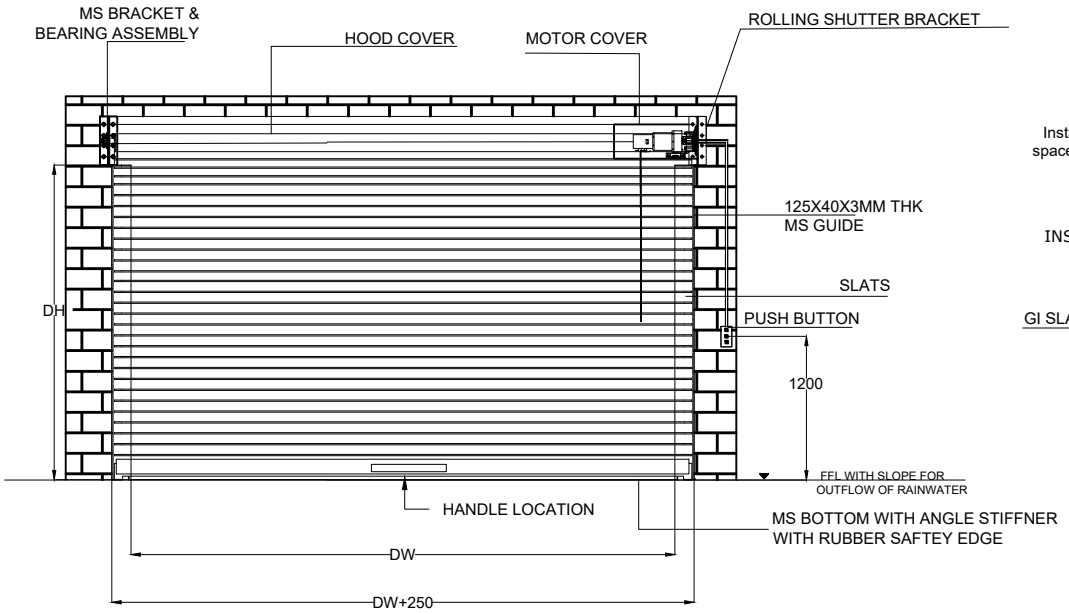


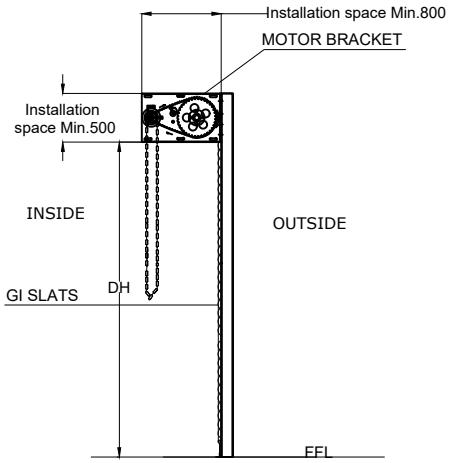

SIDE VIEW

ELEVATION

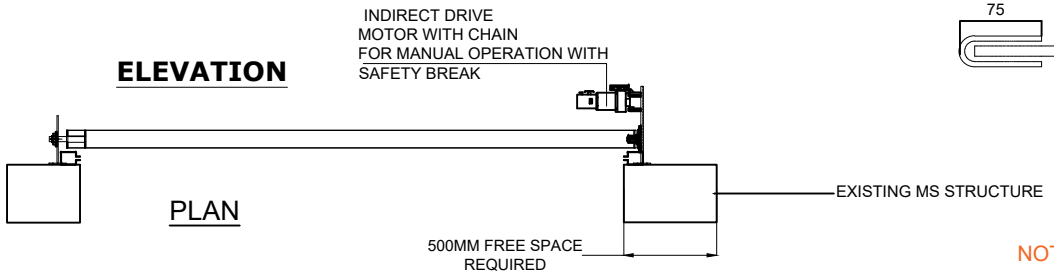



TECHNICAL SPECIFICATION:-

Sr .No.	Specification	Details
1	**Description & Drive**	Motor Opearated Double Wall Puff Insulated Rolling Shutter
2	**Slat**	95 x 19 mm Puff Filled Slat
3	**Motor**	3 Phase Indirect Drive With Chain For Manual Operating
3	**Guide**	U Guide 75 x 32 x 2 mm Thk
4	**Bottom Profile**	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener (25 x 25 x 5 mm)
5	**Mounting Location area**	Inside area / Outside area
6	**Mounting Surface**	Structure Mounting
7	**Hood Cover**	Made of GI Sheet Thickness 0.9 mm
8	**Surface finish**	As per Client Requirement

SIZE:-

DW	DH	QTY
4260	2440	1 No.

NOTE:-

1. All dimensions are in MM
2. Required civil work will be in client scope
3. Required MS structure mounting will be in cllient scope

Revision	Date	Details	Revised By
R1	16/01/2024	U guide Size Changed from 110 to 75	Jayesh

NIHVA TECHNOLOGIES PVT. LTD.

CLIENT - Ingersoll Rand .Ltd

PROJECT - Motorised Rolling Shutter (Indirect Drive)

	NAME	DATE	
DRAWN	S.J	28/12/2023	Project No.NTPL-206
CHECK	A.K	28/12/2023	Format No. -NIHVA-DD-F-03 REV.00
APPRD	V.T	28/12/2023	SCALE: 01 WT: SHEET: 01 OF 01

If any queries contact : design1@nihva.com