AIRTIGHTNESS KIT FOR STRAIGHT SLIDING DOORS

For SPORTUB systems



ENERGY SAVING
Avoids air draughts and heat loss

REINFORCED SECURITY
No space between the wall and the door

MANTION
WWW.MANTION.COM

MANTION SAS
7, rue Gay Lussac
25000 Besançon
Tel. : + 3 33 81 85 38 73/74 - Fax : + 3 33 81 53 29 76
www.mantion.com - Email : export@mantion.com

SPORTUB®

AIRTIGHTNESS KIT FOR DOORS

COMPOSITION OF THE KIT 2200E/300 (for doors 3 x 3 m)		
Fig.	Description	Qty.
1	Joint holder in galvanised steel with rubber flap joint - Length = 3 m *To be fixed on the door pillars*	2
2	Lateral rubber joint with aluminium fixing track - Length = 3 m *To be fixed on the door pillar (on the pushback side)*	1
3	Joint holder in galvanised steel with PVC joint Length = 3 m *To be fixed on the bay lintel*	1
4	Tightness brush for the lower part of the door Length = 3 m	1



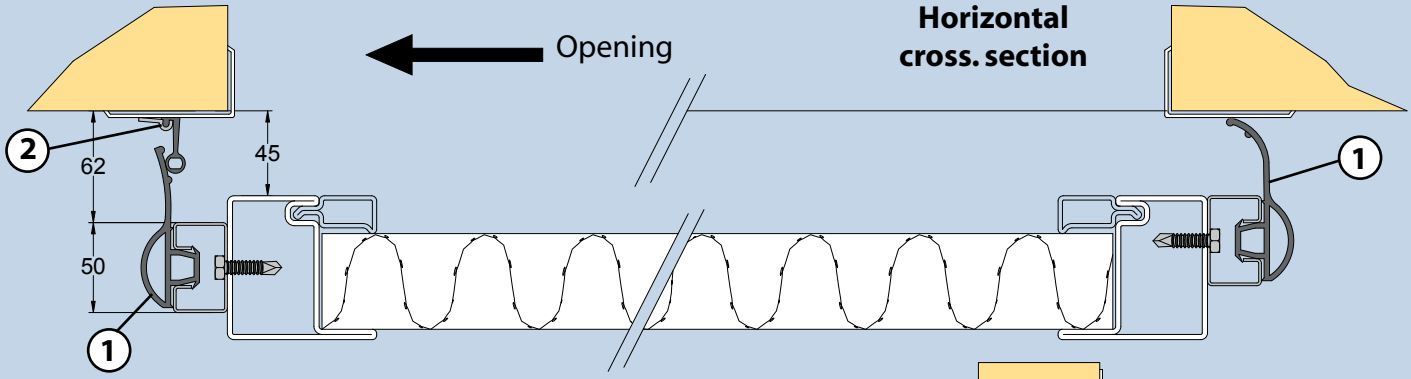
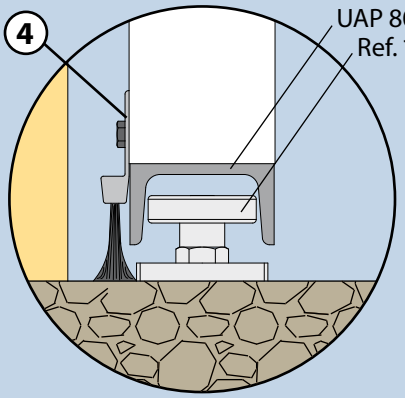

Fig. 1


Fig. 2


Fig. 3

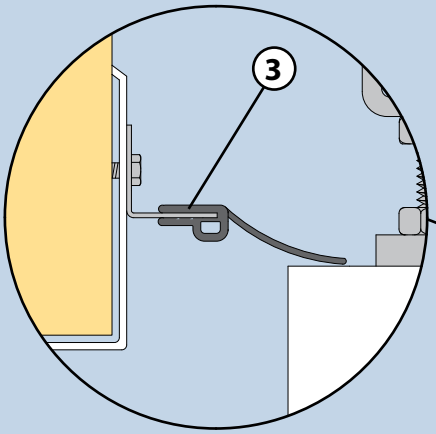

Fig. 4

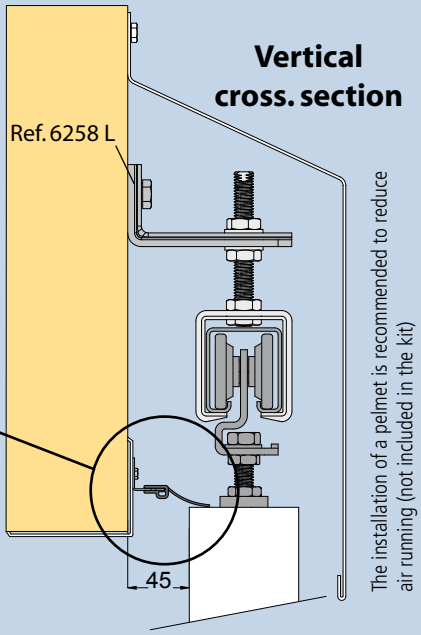


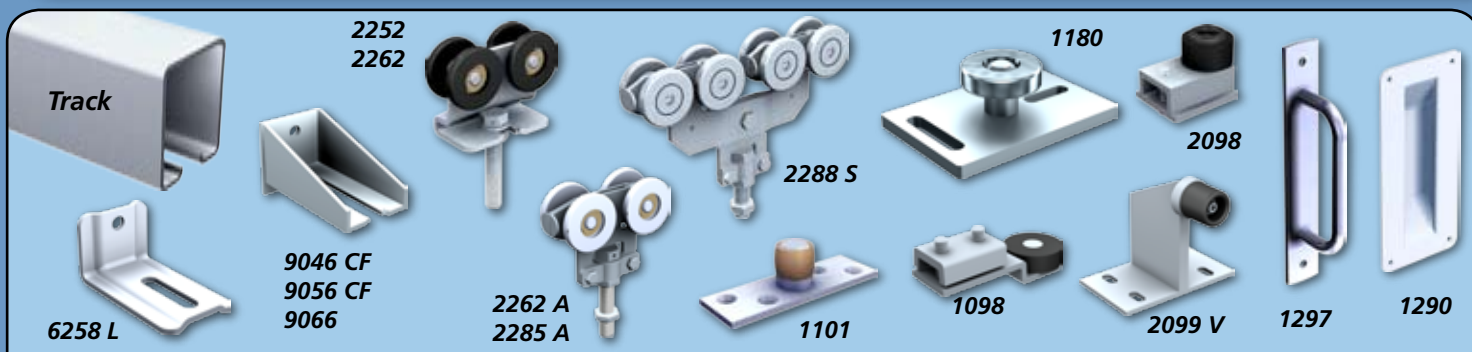


Detailed view of floor guidance

Tightness in the upper part of the door







Door weight	Track	Angle plate	Hanger	Guide	Stop (for track)	Lower stop	Handle
<150Kg	5040	6258L	2252	1101	1098	2099V	1290
>150Kg <300Kg	6255	6258L	2262	1180	2098	conicol stop	1297
>300Kg <400Kg	6255	9046CF	2262A				
>400Kg <800Kg	8570	9056CF	2285A				
>800Kg <2000Kg	8570	9066	2288S				

Février 09 - This document is not contractual