SRB® Since 1957

NIHVA
NIHVA Technologies Pvt. Ltd.

FIRE RESISTANCE Roller Shutters

ISO 9001-2008 Quality Management System

MS ISO/IEC 17021:2006
QS 18112006 CB 04
ISO 9001-2008 Manufacturing Standard

Included of Newly Developed Double Walled Insulated Design for Sound Transmission Management

- 2 & 4 Hour Fire Rated Resistance
- BS 476 Part 22 & MS 1073 Part 3 1988
- Tested in Warrington Fire Research Center UK & Sirim Malaysia

UL-10B Tested

Fire Compartment Requirements

• Residential • Commercial • Industrial





- Included of Newly Developed Double Walled Insulated Design



MITI Industrial Innovative Award 1996



MITI Industrial Product Excellent Award 1998



Selangor State Excellent Product Award 1999



Selangor State Excellent Product Innovative Award 2000



SIRIM Certificate



Warrington Fire Test Certificate

CERTIFIED MALAYSIA BS 476 PART 22 1987
CERTIFIED MALAYSIA
MS MALAYSIA

FIRE RESISTANCE Roller Shutters

Since 1957

BS 476 Part 22 & MS 1073 Part 3 1988
2 & 4 Hour Fire Rated Resistance

Design Specifications

Shutter Curtain

1.Single Skin Design
Roll formed from 1st grade BHP Zincalume steel SKB-A7 curve slat curtain.

2.Double Walled Insulated Design
Roll formed from 1st grade BHP Zincalume steel SKB-F7D flat slat curtain. All slats are infilled with 80kg/m$_2$rockwool.

Guide Rail

Fabricated from hot-dipped galvanised steel of 3.0mm with one piece design surface mounted type.
Model : SKB-G65 powder coated

Bottom Bar

Assembled of 2 pieces of 38x38x3mm galvanised steel angle bolted 800mm pitch with galvanised bolts and nuts or 2 pieces of 40x40x6mm steel flat bar.
Model : SKB-T120 powder coated

Shutter Enclosure Box

Fabricated from heavy duty 7.0mm steel plate for both ends and supports with steel frame with very well black primer one coat. Box covers shall be of 0.8mm steel sheets with BHP zincalume finishing.

Motor Drive Unit

Standard Features
Power Source : 110v 60Hz 1 phase
220v 60Hz 1 phase
230v 50Hz 1 phase
400v 50Hz 3 phase
Insulation Class E
Manual Chain Override
One unit push button switch
Gravity drop level
Auto close by relay switch after receive of 24vdc fire signal

Optional Features

Fail-Safe 24 vdc ER-S-400 Electric Releaser
Extra upper limit safety switch
Air pressure safety bottom sensor
Wireless remote control
Stainless Steel Guides
Typhoon rated design
Guide silencer strips



Shoplots, Malaysia




SKB-A7 (20kg/m^2)



SKB-F7D (35kg/m^2)



Warrington-Before Fire Test

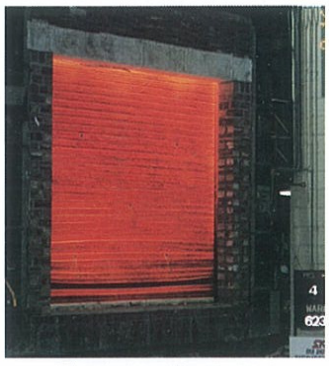



Warrington-After Fire Test







Typical Motorised Design

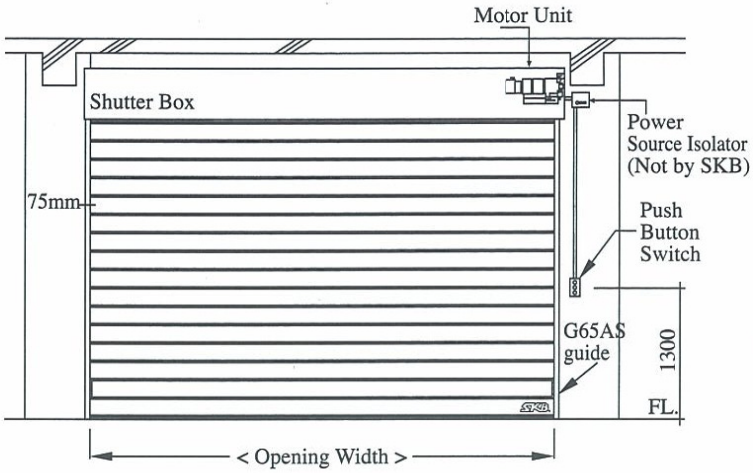

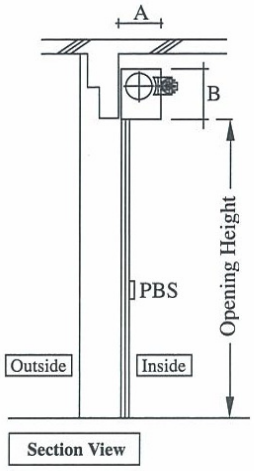


Motorised Concealed Guide Rails

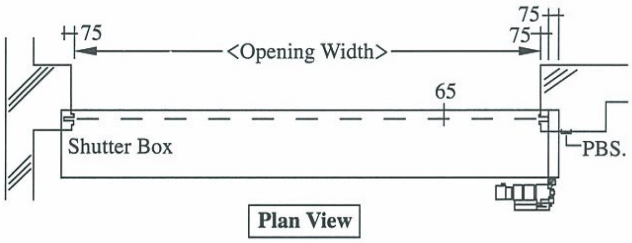


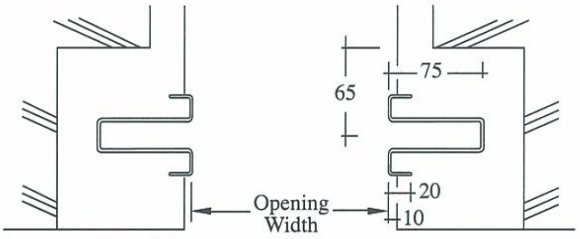

Model : SKB-U75
Concealed Guide Rail

Motorised Surface Mounted Guide Rails

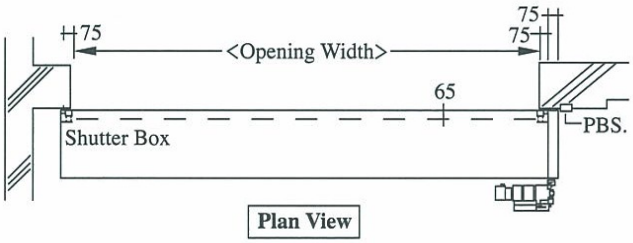

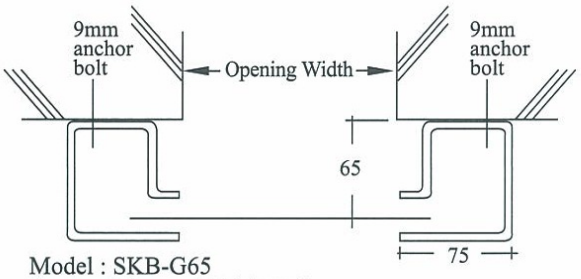

Model : SKB-G65
Surface Mounted Guide Rail
One Piece Design

Motorised Box Enclosure Size

Clear Width	Clear Height	Box Size	
		A	B
7000 mm	3000 mm	400 x 500	
8000 mm	4000 mm	450 x 600	
8000 mm	5000 mm	500 x 600	
9000 mm	6000 mm	600 x 650	

Other Box size please refer to our Technical Department


Box height is decided by the opening height






FIRE RESISTANCE Roller Shutters

Surface Mounted Installation Details

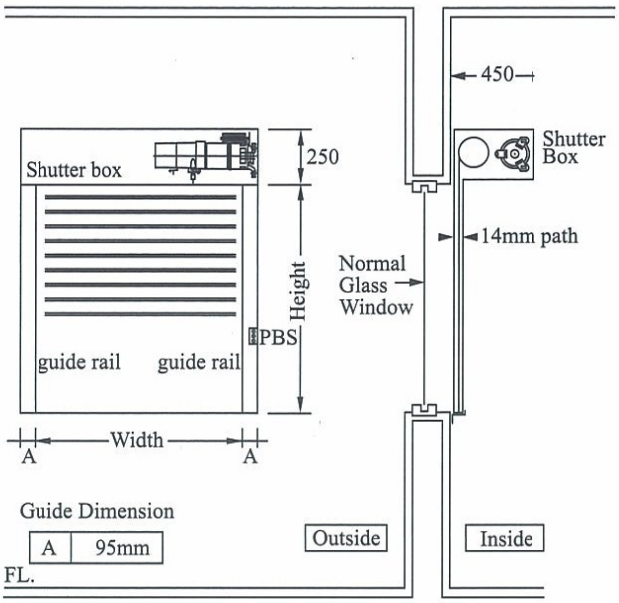

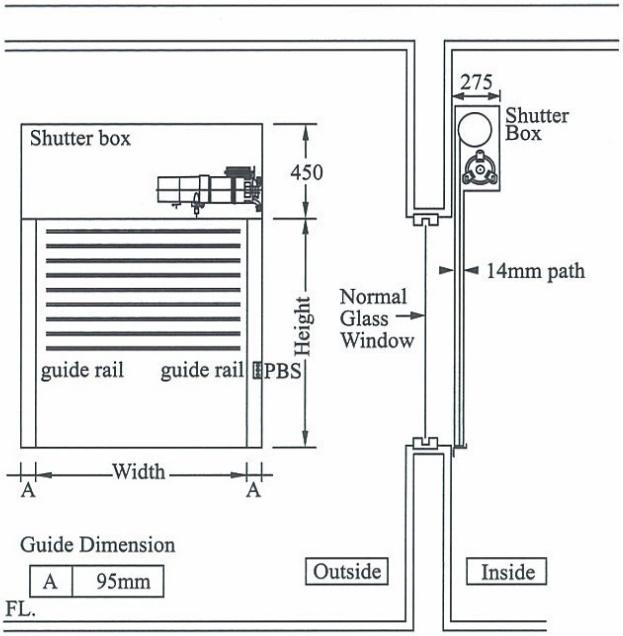

Specifications

Shutters Curtain
Design Model SKB-A738.
Roll formed from 1st grade zincalume / galvanised colourbond steel with 38mm pitch design and folded end lock safety.
< stainless steel also available >
Thickness of shutters confirm to BS 476 part 22 approved.

Bottom Bar
Fabricated of 2 pieces of flat steel bar of 40mm x 4mm bolted.


Guide Rails
Pressed steel section of minimum of 1.5mm thickness of groove of minimum of 30mm depth.
Natural galvanised finishing.

Enclosure Box
Pressed galvanised steel sheet to suite box size comply to fire test approved thickness.


Operation Control
Motorised type :
Gear motor with thermal protector, limit switches, manual override, c/w push button switch with keys lockable.
Power Source : 110v 60Hz 1 phase Insulation Class E
220v 60Hz 1 phase Insulation Class E
230v 50Hz 1 phase Insulation Class E
400v 50Hz 3 phase Insulation Class E
Auto close by relay switch after receive of 24vdc fire signal
< wiring from fire console by others >

Optional Fire Mode Closing
A. by self gravity fuse linkB. 24vdc Electric Releaser ER-S-400


Please call our Technical Department for a Product Comparison table to copied products.



Guide Model SKB-MFG95

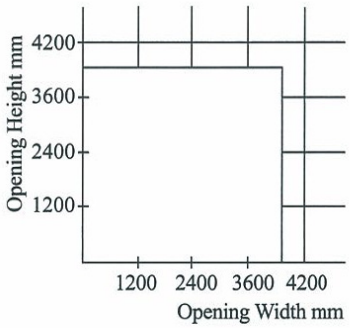

Box Design Size



Shutter Model SKB-A738

Fire Proof Design Approved

Welcome to our Office and Production Plant and Showroom



SKB® Since 1957
SKB SHUTTERS MANUFACTURING SDN BHD 辛建文捲門有限公司
(A subsidiary of SKB Shutters Corporation Berhad-Listed on Bursa Malaysia Stock Exchange) (31982-W)

NIHVA
NIHVA Technologies Pvt. Ltd.

Excellent Award 1996/1998 · Award 1999/2000 · MATRADE · I • TEX 2000 Invention and Design Award · Excellent Award 2007 · SIRIM QAS · CIDB MALAYSIA · A Member of FMM · JOTUN Approved Quality Applicator · CERTIFIED MALAYSIA · MS · SANWA SHUTTER CORPORATION, Japan