

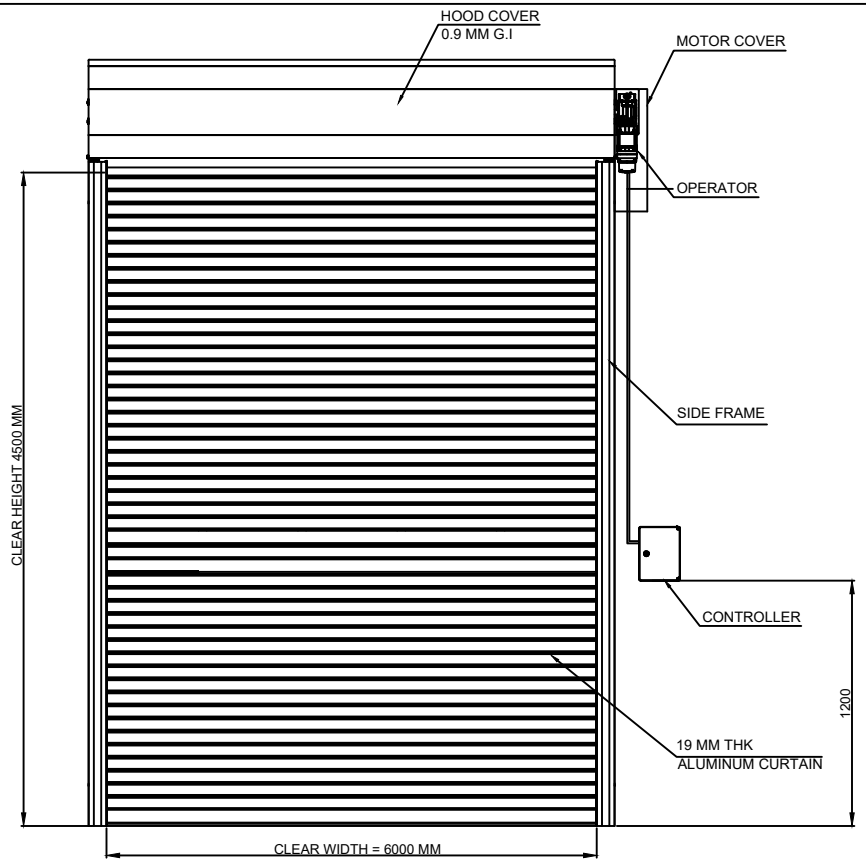



ELEVATION

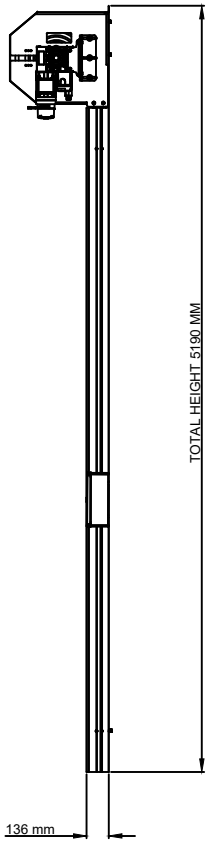

SIDE VIEW

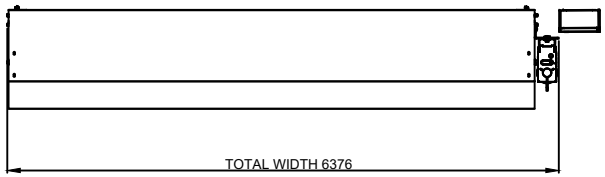

TOP VIEW

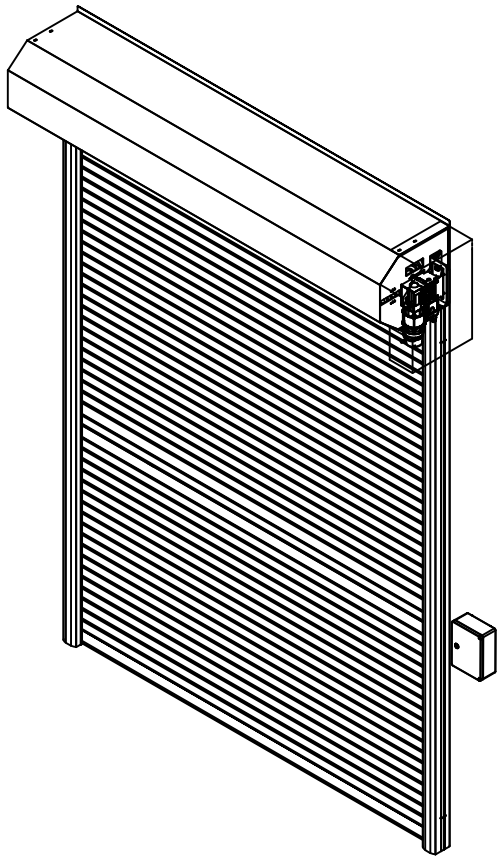

TECHNICAL SPECIFICATIONS		
HIGH SPEED DOOR SIZE -W 6000 x H 4500 - 1 NO		
SR NO	DESCRIPTION	SPECIFICATION
1.	GEAR MOTOR	2.2 KW
2.	CONTROLLER	3 PH INVERTER
3.	MIN. SPEED	0.3 M/S
4.	MAX. SPEED	1 M/S

NOTES:
1. COLOR : POLYURETHANE FILLED RAL 9006 ALLUMINIUM LAMELLA
2. SAFETY DEVICE : PHOTOCELL & SAFETY EDGE
3. RADAR : BOTH SIDE RADAR SENSOR
4. MANUAL ACTIVATION : CRANK HANDLE

DOOR QTY : 2 NOS

Rev No.	Revision	Date	Revised By

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: ALUMINUM HIGH SPEED DOOR

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	SIGN	DATE
DRAWN	Nirmala		22.05.2023
CHECK	A.K.		22.05.2023
APPRD.	V.T.		22.05.2023

CLIENT - Icon Turnkey Ventures LLP
PROJECT - JOHN DEERE
SITE LOCATION - PUNE.

If any queries contact : sales@nihva.com
DWG. NO. : NIHVA/23-24/CLT/009 REV- 1
ALL DIMENSION ARE IN mm
SCALE: NTS WT: SHEET: 01 OF 01