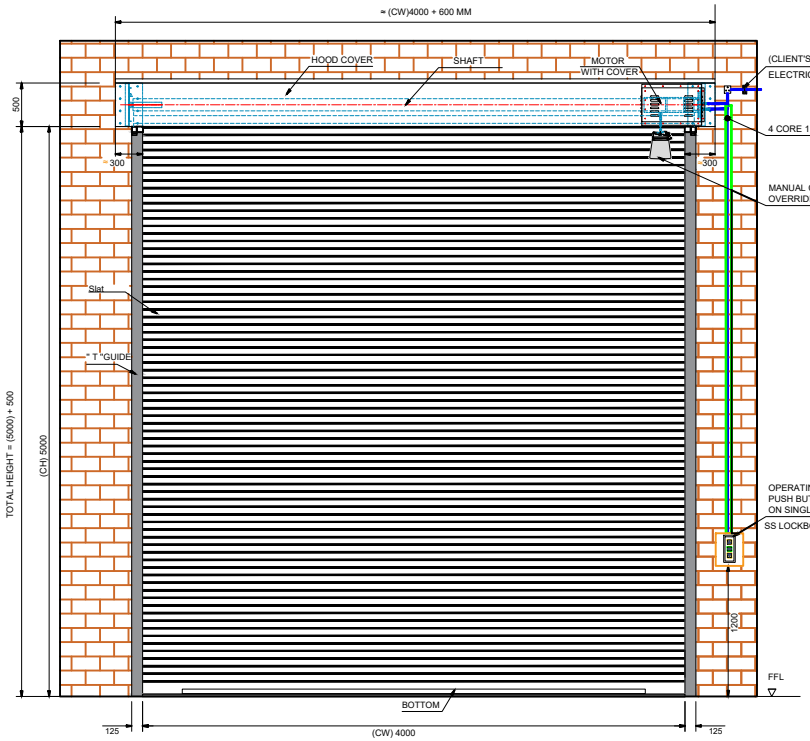
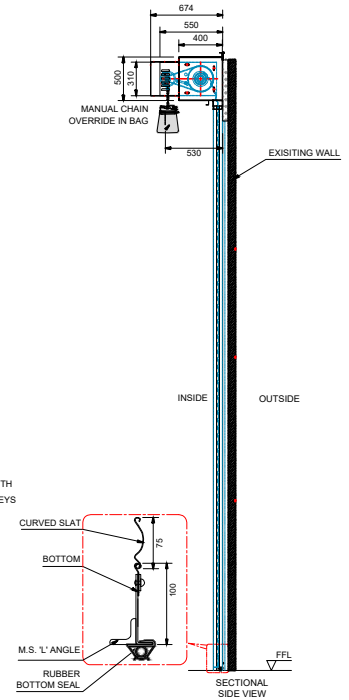



## TECHNICAL SPECIFICATION:-

| SR. | SPECIFICATION | DETAILS |
|---|---|---|
| 1. | Description & Drive | Motorised Rolling Shutter ( Indirect Drive )sprocket Chain arrangement. |
| 2. | Location Area | Inside/Out side |
| 3. | Mounting Surface | Side Brackets: Optional+On concrete/Steel&Side |
| 4. | Slat | Curved 75 mm GI Sheet - 1.2 mm Thk |
| 5. | Bottom Profile | MS Plate 100 x 2.5 mm thick with Angle Stiffener |
| 6. | Guide Profile | M.S." T " Shape profile 65 mm -150 x 3.0 mm Thick. |
| 7. | Hood Cover & Motor Cover | Made of GI Sheet Thickness 0.9 mm |
| 8. | Motor | Swift roll make |
| 9. | Colour | Synthetic Enamel Paint |
| 10. | Push Botton | 3 Way Push Baton on Single Side |

## SHUTTER SIZES :-

| SR. | CLEAR WIDTH | CLEAR HEIGHT | QTY. |
|---|---|---|---|
| 01 | 4000 mm | 5000 mm | 01 |

Note :-

1. All Dimension are in mm
2. This drawing is only for understanding purpose

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

| | NAME | DATE | |
|---|---|---|---|
| DRAWN | B.S. | 16/07/2025 | CLIENT - GS PEB & CIVIL WORK PVT. LTD. |
| CHECK & APPROVAL | V.T. | 16/07/2025 | PROJECT - MOTORISED ROLLING SHUTTER |
| | | | FORMAT NO - NIHVA-DD-F-03 |
| | | | DWG. NO. : NIHVA/24-25/GB/2411001 REV-00 |
| | | | SCALE: NTS WT: SHEET: 01 OF 01 |
| ALL DIMENSION ARE IN mm | | | If any queries contact : design@nihva.com |