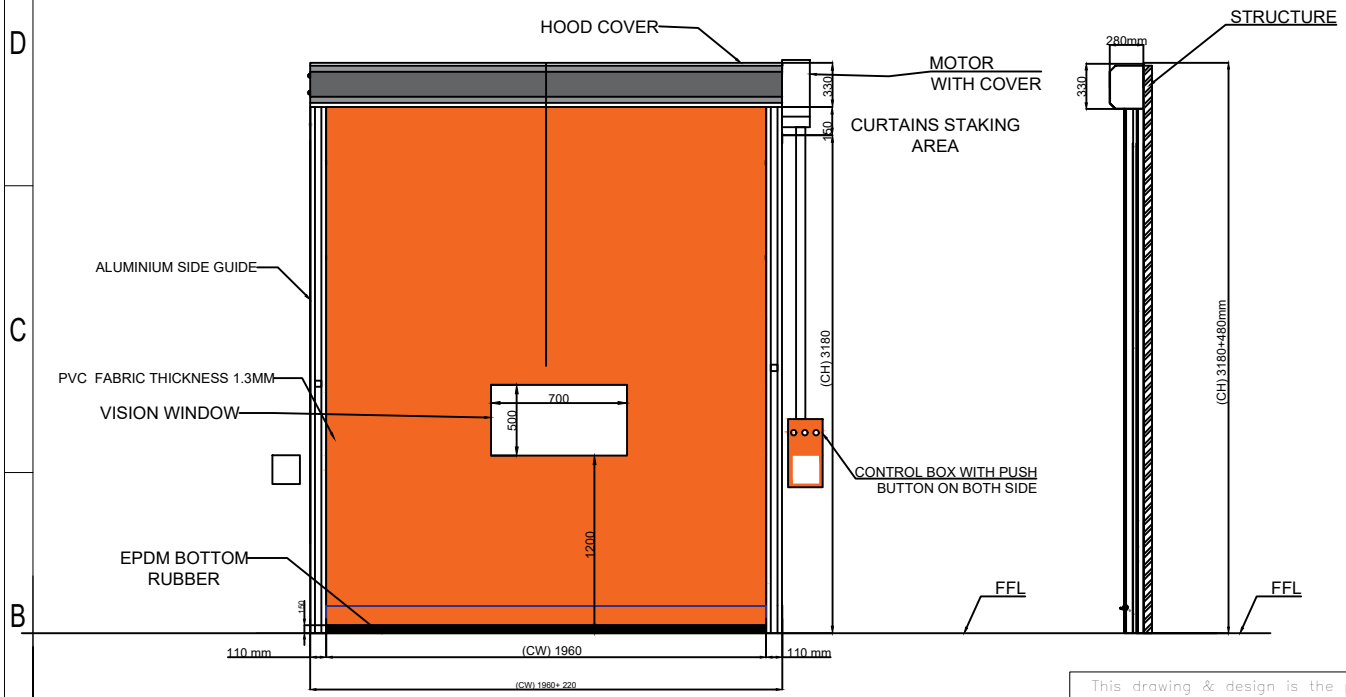


TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	USE	INTERNAL DOOR
2	MOUNTING	ON STRUCTURE: INSIDE / OUTSIDE
3	CURTAIN PANEL	PVC FABRIC THICKNESS 1.3 MM, 1700GSM
4	MANUAL RELEASE	CRANK HANDLE
5	DOOR TRAVEL SPEED	OPENING: UPTO 1.5M/SEC & CLOSING: 0.8 M/SEC
6	SAFETY DEVICE	1800 MM HEIGHT LIGHT CURTAIN
7	ACCESSORIES	THREE WAY PUSH BUTTON
8	RAL CODE	AS PER CLIENT (PLEASE CONFIRM RAL Shade)
9	STRUCTURE	THREE WAY PUSH BUTTON

HIGH SPEED ROLL UP DOOR SIZES :-

SR	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	**2180**	**3180**	01

NOTE :-

1. All DIMENSIONS ARE IN MM.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	HIGH SPEED DOOR			NIHVA TECHNOLOGIES PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com	
	NAME	SIGN	DATE		
DRAWN	J.P		01.10.2025	CLIENT - TENNECO CLEAN AIR	
CHECK	B.S		01.10.2025	PROJECT - MACHINE PROTECTION DOOR	
APPRD.	V.T		01.10.2025	FORMAT NO - NIHVA-DD-F-03	
If any queries contact : Design@nihva.com				DWG. NO. : NIHVA/24-25/MP/1308001	REV- R00
ALL DIMENSION ARE IN mm				SCALE: NTS	WT: SHEET: