
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

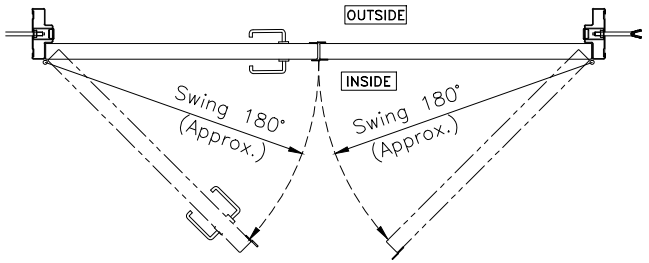


SPECIFICATIONS :–


H – Overall Height of Door Frame.
W – Overall Width of Door Frame.
h – Clear Height opening (H–132 mm approx).
C – Clear Width opening (W–200 mm).
T – Nominal Shutter Thickness = (60mm approx).
D – Depth of Door Frame (142mm approx).
– Dimension Active shutter side.
– Dimension Inactive shutter side.

NOTES :–


1) Door Frame shall be fabricated from 2Thk. CRCA steel sheets to form a stepped profile & fixed to wall with Holdfasts.
2) Shutter Panels shall be fabricated from 1.25Thk. Galv. steel having lock seam joints to provide a nominal thickness of 60mm. Shutter flatness may vary till 8mm depending upon the door size & shutters shall have infill material with reinforcements at top, bottom edges & for hardware fitments.
3) 4nos. 4" Ball Bearing Hinges shall be provided on each shutter.
4) Accessories to be provided on Door are as follows :–
   a) 300mm Aldrop – 1no.
   b) 200mm D Handle Pair – 1no.
   c) 300mm towerbolt inactive leaf– 1nos.
   d) Door closer – 2no.

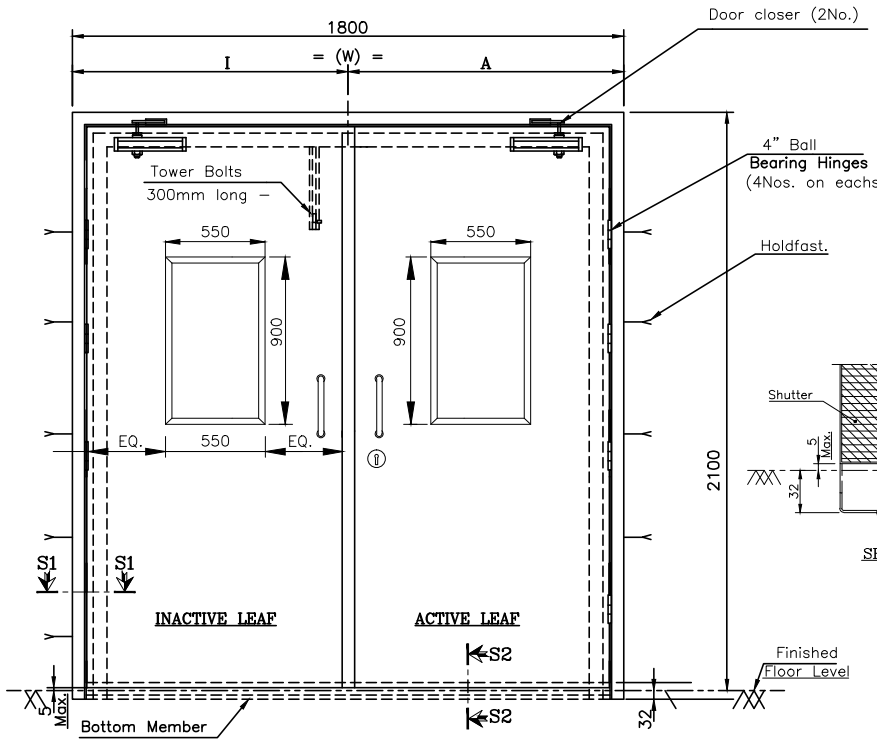

DOUBLE LEAF DOOR
Opening Outside Right Leaf Active

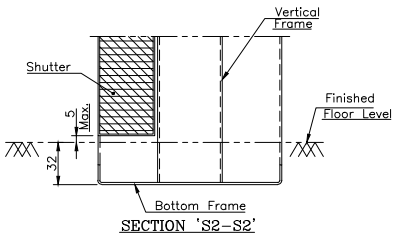

SECTION 'S2–S2'

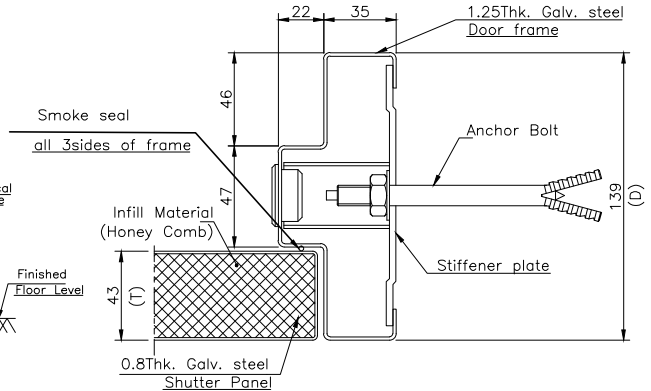

SECTION 'S1–S1'

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT