
编号 No.	名称 Name	数量 Quantity
FBM3030 3000X3000	A类甲级防火平开防盗门	1

立面（洞口尺寸）Elevation（opening size）



框 Frame	1.5厚热镀锌钢板 1.5 thick hot-dip galvanized steel sheet
扇 Leaf	1.0厚热镀锌钢板 1.0 thick hot-dip galvanized steel sheet
玻璃 Glass	透明防火玻璃，1.5小时甲火极限 Transparent fireproof glass, 1.5 hour fireproof limit
百叶 Louver	– –
备注 Note	钢质隔热甲级防火门（A类—A1.50），其上镶嵌的防火玻璃应符合A类防火门的条件 Steel insulated Class A fire doors (Class A-A1.50), whose inlaid fire-proof glass should meet the requirements of Class A fire-proof doors.

		铰链 Hinge	配套不锈钢铰链 Matching stainless steel hinge
		制动 Closure	液压闭门器，顺序器 Hydraulic door closer, sequencer
		门槛 Sill	–
		执手 Handle	配套 Support

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
M2421 2400X2100	推拉门	16

立面（洞口尺寸）Elevation（opening size）


框 Frame	1.5厚热镀锌钢板，氟碳喷涂 1.5 thick electro-galvanized steel sheet, fluorocarbon spray
扇 Leaf	实心硬木门心板，表面油漆处理 Solid hardwood door panel, surface paint treatment
玻璃 Glass	透明玻璃 Transparent glass
百叶 Louver	木百叶 Wood shutters
备注 Note	门及五金须与门窗厂家确认，由专业厂家设计制造及安装 Doors and hardware must be confirmed by the door and window manufacturers, designed and manufactured by professional manufacturers.

		铰链 Hinge	配套不锈钢铰链 Supporting stainless steel hinge
		制动 Closure	–
		门槛 Sill	–
		执手 Handle	配套 Support

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
FM3023(4h) 3000X2300	无指令防火甲级门（4h）	1

立面（洞口尺寸）Elevation（opening size）

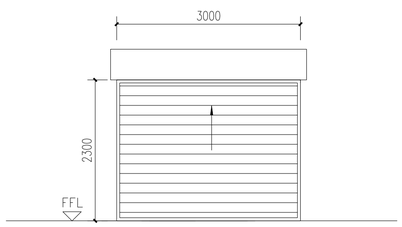

框 Frame	厂家配套 Manufacturer support
扇 Leaf	厂家配套 Manufacturer support
玻璃 Glass	– –
百叶 Louver	– –
备注 Note	耐火时间满足4.0h要求；门及五金须与门窗厂家确认，由专业厂家设计制造及安装 The fire resistance time meets the requirements of 4.0h, the door and hardware must be confirmed by the door and window manufacturers, designed, manufactured and installed by professional manufacturers.

		铰链 Hinge	–
		制动 Closure	电动带手动 Electric plus manual
		门槛 Sill	–
		执手 Handle	–

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
LC1212 1200X1200	铝合金固定窗	8

立面（洞口尺寸）Elevation（opening size）


框 Frame	1.5厚热镀锌钢板，氟碳喷涂 1.5 thick electro-galvanized steel sheet, fluorocarbon spray
扇 Leaf	实心硬木门心板，表面油漆处理 Solid hardwood door panel, surface paint treatment
玻璃 Glass	透明玻璃 Transparent glass
百叶 Louver	木百叶 Wood shutters
备注 Note	门及五金须与门窗厂家确认，由专业厂家设计制造及安装 Doors and hardware must be confirmed by the door and window manufacturers, designed and manufactured by professional manufacturers.

		铰链 Hinge	配套不锈钢铰链 Supporting stainless steel hinge
		制动 Closure	闭门器 Door closer
		门槛 Sill	–
		执手 Handle	配套 Support

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
QM1221 1200*2100	洁净室金属板手开双扇卷闸门	2

立面（洞口尺寸）Elevation（opening size）

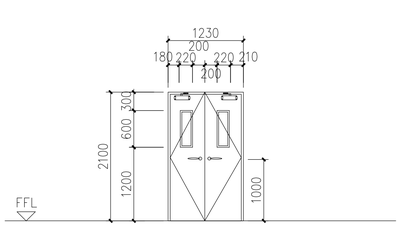

框 Frame	1.5厚烤漆镀锌钢板 1.5 thick paint galvanized steel
扇 Leaf	0.8厚烤漆镀锌钢板（双面），防火岩棉填充 0.8 thick galvanized steel plate (double sided), fireproof rock wool filling
玻璃 Glass	6厚白玻 6 thick white glass
百叶 Louver	– –
备注 Note	洁净室密闭门，需满足洁净室气密性要求。表面为白色树脂涂层，防静电 Closed doors in the clean room must meet the airtight requirements of the clean room. White resin-coated surface, anti-static

		铰链 Hinge	配套不锈钢铰链 Matching stainless steel hinge
		制动 Closure	闭门器 Door closer
		门槛 Sill	–
		执手 Handle	配套 Support

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
FM3030 3000X3000	A类甲级防火平开防盗门	1

立面（洞口尺寸）Elevation（opening size）

框 Frame	1.5厚热镀锌钢板 1.5 thick hot-dip galvanized steel sheet
扇 Leaf	1.0厚热镀锌钢板 1.0 thick hot-dip galvanized steel sheet
玻璃 Glass	透明防火玻璃，1.5小时甲火极限 Transparent fireproof glass, 1.5 hour fireproof limit
百叶 Louver	– –
备注 Note	钢质隔热甲级防火门（A类—A1.50），其上镶嵌的防火玻璃应符合A类防火门的条件 Steel insulated Class A fire doors (Class A-A1.50), whose inlaid fire-proof glass should meet the requirements of Class A fire-proof doors.

		铰链 Hinge	配套不锈钢铰链 Matching stainless steel hinge
		制动 Closure	液压闭门器，顺序器 Hydraulic door closer, sequencer
		门槛 Sill	–
		执手 Handle	配套 Support

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
M2421 2400X2100	推拉门	16

立面（洞口尺寸）Elevation（opening size）


框 Frame	1.5厚热镀锌钢板，氟碳喷涂 1.5 thick electro-galvanized steel sheet, fluorocarbon spray
扇 Leaf	实心硬木门心板，表面油漆处理 Solid hardwood door panel, surface paint treatment
玻璃 Glass	透明玻璃 Transparent glass
百叶 Louver	木百叶 Wood shutters
备注 Note	门及五金须与门窗厂家确认，由专业厂家设计制造及安装 Doors and hardware must be confirmed by the door and window manufacturers, designed and manufactured by professional manufacturers.

		铰链 Hinge	配套不锈钢铰链 Supporting stainless steel hinge
		制动 Closure	–
		门槛 Sill	–
		执手 Handle	配套 Support

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
LC1509 1500X900	铝合金固定窗	5

立面（洞口尺寸）Elevation（opening size）

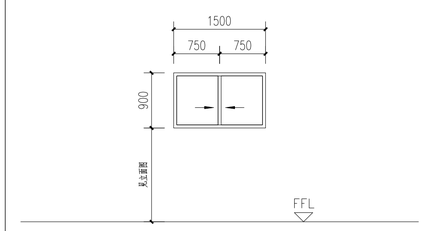


框 Frame	新热型铝合金，氟碳喷涂，隔热条高度26.0mm Heat-dissipating aluminum alloy, fluorocarbon spray, heat insulation strip height 26.0mm
扇 Leaf	– –
玻璃 Glass	5Low-e+15A+5厚中空玻璃，中遮光，离线单银 5Low-e+15A+5 thick insulating glass, medium light transmission, offline single silver
百叶 Louver	– –
备注 Note	受力构件壁厚不小于1.6mm The wall thickness of the stressed member is not less than 1.6mm

		铰链 Hinge	–
		制动 Closure	手动 Manually
		门槛 Sill	–
		执手 Handle	–

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
FJM1221(2h) 1200X2100	无指令防火甲级门（2h）	1

立面（洞口尺寸）Elevation（opening size）

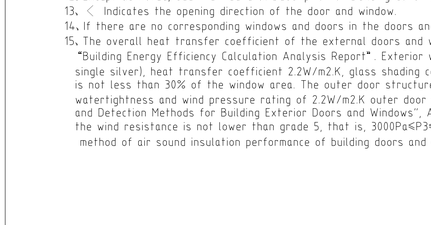

框 Frame	厂家配套 Manufacturer support
扇 Leaf	厂家配套 Manufacturer support
玻璃 Glass	– –
百叶 Louver	– –
备注 Note	耐火时间满足2.0h要求；门及五金须与门窗厂家确认，由专业厂家设计制造及安装 The fire resistance time meets the requirements of 2.0h, the door and hardware must be confirmed by the door and window manufacturers, designed, manufactured and installed by professional manufacturers.

		铰链 Hinge	–
		制动 Closure	电动带手动 Electric plus manual
		门槛 Sill	–
		执手 Handle	–

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
LC1221 1200X1500	铝合金固定窗	10

立面（洞口尺寸）Elevation（opening size）



框 Frame	新热型铝合金，氟碳喷涂，隔热条高度26.0mm Heat-dissipating aluminum alloy, fluorocarbon spray, heat insulation strip height 26.0mm
扇 Leaf	– –
玻璃 Glass	6厚白玻 6 thick white glass
百叶 Louver	– –
备注 Note	受力构件壁厚不小于1.6mm The wall thickness of the stressed member is not less than 1.6mm

		铰链 Hinge	–
		制动 Closure	–
		门槛 Sill	–
		执手 Handle	–

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
FJM1821(2h) 1800X2100	无指令防火甲级门（2h）	

立面（洞口尺寸）Elevation（opening size）


框 Frame	厂家配套 Manufacturer support
扇 Leaf	厂家配套 Manufacturer support
玻璃 Glass	– –
百叶 Louver	– –
备注 Note	耐火时间满足2.0h要求；门及五金须与门窗厂家确认，由专业厂家设计制造及安装 The fire resistance time meets the requirements of 2.0h, the door and hardware must be confirmed by the door and window manufacturers, designed, manufactured and installed by professional manufacturers.

		铰链 Hinge	–
		制动 Closure	电动带手动 Electric plus manual
		门槛 Sill	–
		执手 Handle	–

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
MM1021 900*2100	木质平开门	16

立面（洞口尺寸）Elevation（opening size）

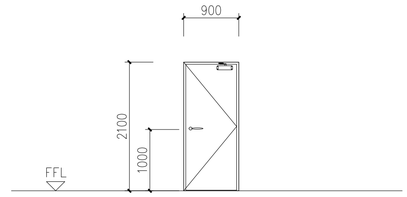

框 Frame	1.5厚电镀锌钢板，氟碳喷涂 1.5 thick electro-galvanized steel sheet, fluorocarbon spray
扇 Leaf	实心硬木门心板，表面油漆处理 Solid hardwood door panel, surface paint treatment
玻璃 Glass	– –
百叶 Louver	木百叶 Wood shutters
备注 Note	门及五金须与门窗厂家确认，由专业厂家设计制造及安装 Doors and hardware must be confirmed by the door and window manufacturers, designed and manufactured by professional manufacturers.

		铰链 Hinge	配套不锈钢铰链 Supporting stainless steel hinge
		制动 Closure	闭门器 Door closer
		门槛 Sill	–
		执手 Handle	配套 Support

		纱窗 Screen	–
		锁具 Lock	配套 Support

编号 No.	名称 Name	数量 Quantity
LC1260 1200X6000	上悬铝合金窗	18

立面（洞口尺寸）Elevation（opening size）

框 Frame	新热型铝合金，氟碳喷涂，隔热条高度26.0mm Heat-dissipating aluminum alloy, fluorocarbon spray, heat insulation strip height 26.0mm
扇 Leaf	– –
玻璃 Glass	5Low-e+15A+5厚中空玻璃，中遮光，离线单银 5Low-e+15A+5 thick insulating glass, medium light transmission, offline single silver
百叶 Louver	– –
备注 Note	电动排烟窗，消控联动 Electric smoke exhaust window, fire linkage

		铰链 Hinge	–
		制动 Closure	手动 Manually
		门槛 Sill	–
		执手 Handle	–

		纱窗 Screen	–
		锁具 Lock	配套 Support

Description:

1、The number of keys is confirmed by the owner and the supplier.
2、Doors and windows should be confirmed with the owner before ordering.
3、If the individual quantity in this door and window table does not match the actual dosage, the actual dosage shall prevail.
4、The division of the glass partition is only an indication, and the division is determined by the professional manufacturer according to the actual situation on the spot and the aesthetics.
5、All doors and windows are manufactured and installed by quality assurance manufacturers.
6、The high window on the wall (including the power window) is equipped with a manual hinge opening.
7、Aluminum alloy gold rainproof louvers are equipped with insect nets.
8、The sliding window sash should have means to prevent detachment from the outside, and when used for the external wall, a device for preventing the sash from falling out of the room should be provided.
9、A transparent glass door should be marked to prevent personal injury.
11、The height of the door opening should be calculated from the completion of the building. All doors and windows must be checked for actual hole size before machining.
12、Except as noted, see the "General Description of Building Construction Drawing Design".
13、＜ Indicates the opening direction of the door and window.
14、If there are no corresponding windows and doors in the doors and windows of the door and window table, it must be confirmed with the design before purchase, customization and construction.
15、The overall heat transfer coefficient of the external doors and windows with energy-saving requirements shall meet the requirements of the corresponding external doors and windows in the "Building Energy Efficiency Calculation Analysis Report". Exterior window structure: metal heat insulation profile (insulation strip height 26.0mm (5Low-e+15A+5 (medium light transmission, offline single silver), heat transfer coefficient 2.2W/m2.K, glass shading coefficient 0.65, window frame The coefficient is 0.75, the visible light transmittance is 0.60. The openable area of the outer window is not less than 30% of the window area. The outer door structure: 1.0mm steel plate + aluminum silicate fiber cotton (dry density 160Kg/m3) + 1.0mm steel plate), heat transfer coefficient The airtightness, watertightness and wind pressure rating of 2.2W/m2.K outer door and window shall comply with the relevant provisions of GB/T7106-2008, "Airtight, Watertight, Wind Pressure Performance Classification and Detection Methods for Building Exterior Doors and Windows". Airtight The property is not less than grade 6, that is, 1.5q1>1.0m3/m·h; the watertightness is not lower than grade 4, that is, 350Pa≤ΔP≤500Pa; the wind resistance is not lower than grade 5, that is, 3000Pa≤P3≤3500pa. The sound insulation performance classification is not lower than the level 4 of GB/T8485-2008 in the classification and detection method of air sound insulation performance of building doors and windows, that is, 40dB>R+C≥35dB.

索引图 Keyplan

版本 REV.	版本说明 Description	日期 Date

注册执业印章 Registered Stamp

注册执业师 Professional Engineer

出图印章 Print Stamp

管理公司 PMC AGENCY

JLL

设计单位 Designer

中电科技
设计证号: A151000523
中电产业电子第十一设计研究院科技工程股份有限公司
The IT Electronics Eleventh Design & Research Institute Scientific and Technological Engineering Corporation Ltd.
中国 成都 新华大道双林路251号
NO. 251 Shuanglin Rd. Xinhua Avenue. Chengdu, China
邮编 /610021 P.C./610021

建设单位 Owner

Hengtong Optic-Electric India Private Ltd

项目名称 Project Name

Indian Optical Fiber and Cable Project

图纸名称 Drawing Title

设计 Designed By		项目号 Project No.	
制图 Drawn By		设计阶段 Des. Stage	
校对 Checked By		专业 Discipline	
审核 Reviewed By		比例 Scale	
审定 Approved		版本 Version	
专业负责人 Discipline Leader		日期 Date	
项目负责人 Design Manager		页数 Sheet No.	
图号 Drawing No.			

专业 Discipline 签署 Signature
总图 MP 建筑 AR 结构 ST
专业 Discipline 签署 Signature
给水排水 PL 空调通风 HV 工业管道 PP
专业 Discipline 签署 Signature
供电 EL 自控 IC 通信 CO
专业 Discipline 签署 Signature
电照 LI 工艺 PR