SKB®
Reg. Trademark No. 85/B03843

Award Winning Product

FIRE RESISTANCE Roller Shutters

BS 476 Part 22 & MS 1073 Part 3 1988
Tested in Warrington Fire Research Center UK & Sirim Malaysia
2 & 4 Hour Fire Rated Resistance

Fire Compartment Requirements

• Residential • Commercial • Industrial





◆ Included of Newly Developed Double Walled Insulated Design for Sound Transmission Management





MITI Industrial Innovative Award 1996





MITI Industrial Product Excellent Award 1998




Selangor State Excellent Product Award 1999




Selangor State Excellent Product Innovative Award 2000




SIRIM Certificate



Warrrington Fire Test Certificate

CERTIFIED MALAYSIA BS 476 PART 22 1987
CERTIFIED MALAYSIA
MS MALAYSIA

SIRIM Impact Tested

FIRE RESISTANCE Roller Shutters

SKB® Reg. Trademark No. 85/B03843

BS 476 Part 22 & MS 1073 Part 3 1988
2 & 4 Hour Fire Rated Resistance

Design Specifications

Shutter Curtain

1. **Single Skin Design**
   Roll formed from 1st grade BHP Zincalume steel SKB-A7 curve slat curtain.
2. **Double Walled Insulated Design**
   Roll formed from 1st grade BHP Zincalume steel SKB-F7D flat slat curtain. All slats are infilled with 80kg/m² rockwool.

Guide Rail

Fabricated from hot-dipped galvanised steel of 3.0mm with one piece design surface mounted type.
Model : SKB-G65 powder coated

Bottom Bar

Assembled of 2 pieces of 38x38x3mm galvanised steel angle bolted 800mm pitch with galvanised bolts and nuts or 2 pieces of 40x40x6mm steel flat bar.
Model : SKB-T120 powder coated

Shutter Enclosure Box

Fabricated from heavy duty 7.0mm steel plate for both ends and supports with steel frame with very well black primer one coat. Box covers shall be of 0.8mm steel sheets with BHP zincalume finishing.

Motor Drive Unit


Standard Features
Power Source : 110v 60Hz 1 phase
220v 60Hz 1 phase
230v 50Hz 1 phase
400v 50Hz 3 phase
Insulation Class E
Manual Chain Override
One unit push button switch
Gravity drop level
Auto close by relay switch after receive of 24vdc fire signal

Optional Features


Fail-Safe 24 vdc ER-S-400 Electric Releaser
Extra upper limit safety switch
Air pressure safety bottom sensor
Wireless remote control
Stainless Steel Guides
Typhoon rated design
Guide silencer strips




Shoplots, Malaysia

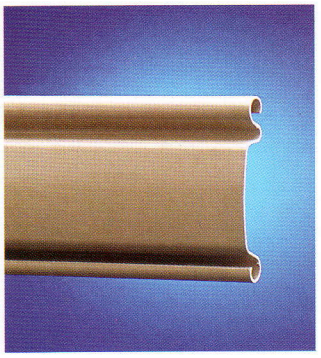


SKB-A7 (20kg/m²)

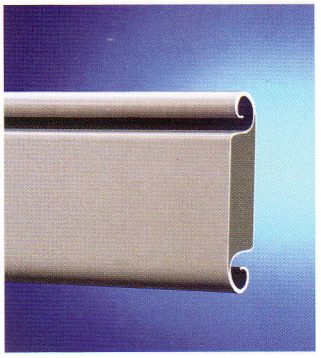

SKB-F7D (35kg/m²)

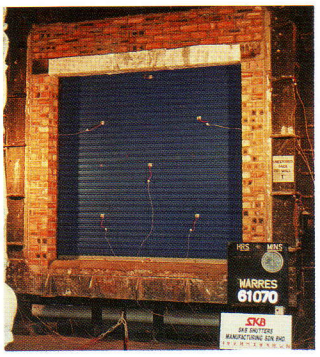


Warrington-Before Fire Test

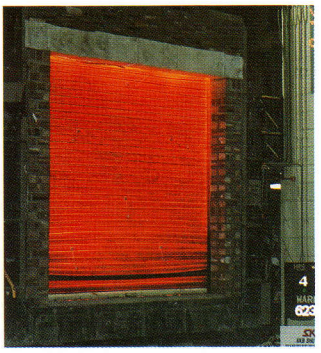

Warrington-After Fire Test



SIRIM-Before Fire Test

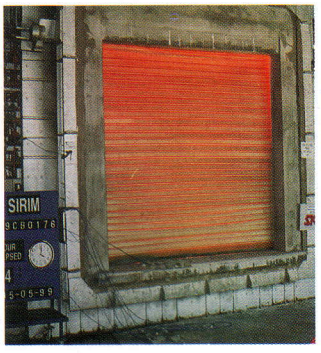


SIRIM-After Fire Test


Standard Design Drawing

FIRE RESISTANCE Roller Shutters

Typical Motorised Design

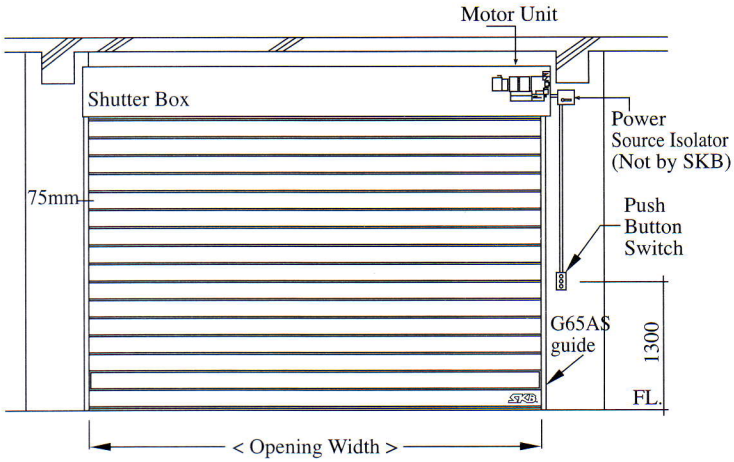


Front View

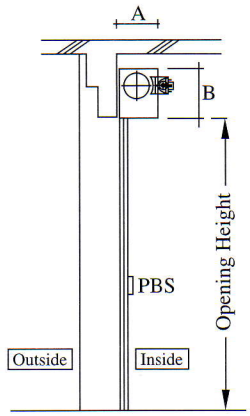


Section View

Motorised Concealed Guide Rails

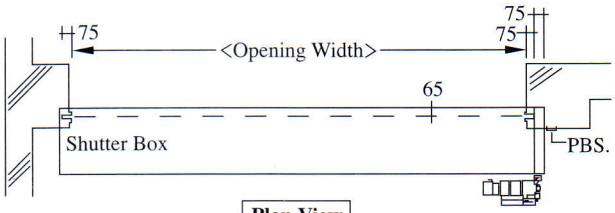


Plan View

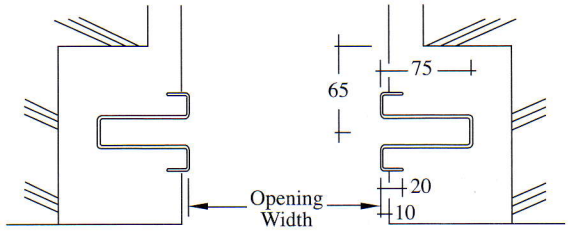


Model : SKB-U75
Concealed Guide Rail

Motorised Surface Mounted Guide Rails

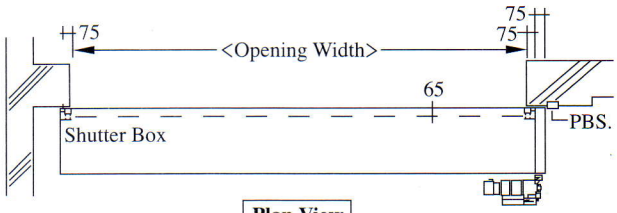

Plan View

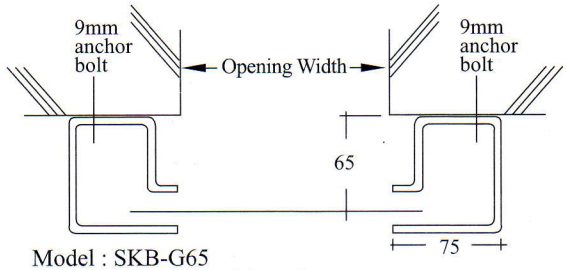

Model : SKB-G65
Surface Mounted Guide Rail
One Piece Design

Motorised Box Enclosure Size

Clear Width	Clear Height	Box Size	
		A	B
7000 mm	3000 mm	400 x 500	
8000 mm	4000 mm	450 x 600	
8000 mm	5000 mm	500 x 600	
9000 mm	6000 mm	600 x 650	

Other Box size please refer to our Technical Department

Box height is decided by the opening height







Window Fire Resistance Shutters BS 476 Part 22

FIRE RESISTANCE Roller Shutters

Surface Mounted Installation Details

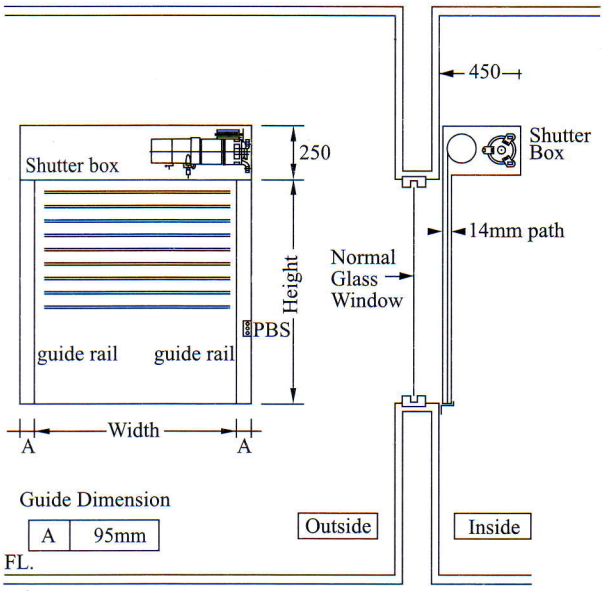

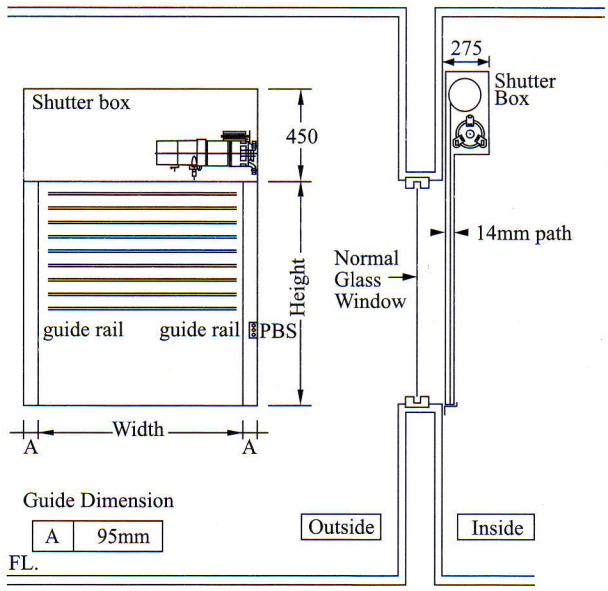

Specifications

Shutters Curtain

Design Model SKB-A738.
Roll formed from 1st grade zincalume / galvanised colourbond steel with 38mm pitch design and folded end lock safety.
< stainless steel also available >
Thickness of shutters confirm to BS 476 part 22 approved.

Bottom Bar

Fabricated of 2 pieces of flat steel bar of 40mm x 4mm bolted.

Guide Rails

Pressed steel section of minimum of 1.5mm thickness of groove of minimum of 30mm depth.
Natural galvanised finishing.

Enclosure Box


Pressed galvanised steel sheet to suite box size comply to fire test approved thickness.

Operation Control


Motorised type :
Gear motor with thermal protector, limit switches, manual override, c/w push button switch with keys lockable.
Power Source : 110v 60Hz 1 phase Insulation Class E
220v 60Hz 1 phase Insulation Class E
230v 50Hz 1 phase Insulation Class E
400v 50Hz 3 phase Insulation Class E
Auto close by relay switch after receive of 24vdc fire signal
< wiring from fire console by others >

Optional Fire Mode Closing


A. by self gravity fuse link
B. 24vdc Electric Releaser ER-S-400



Guide Model SKB-MFG95



Box Design Size



Shutter Model SKB-A738

Fire Proof Design Approved

SKB Factory and Sales Office



Please call our Technical Department for a Product Comparison table to copied products.

SKB® Reg. Trademark No. 85/B03843 Kota Damansara, Malaysia

SKB Shutters Manufacturing Sdn. Bhd. (31982-W)
(A subsidiary of **SKB Shutters Corporation Berhad**. --- Listed on KLSE 2nd Board)
SKB is a registered trademark of SKB Shutters Manufacturing Sdn. Bhd. (No.85/B03843)
A Member of FMM, Matrade, PAM, SIRIM QAS, MITI & Fire Department approved manufacturer.

we reserve the rights to upgrade any specification without any prior notice. 0704