

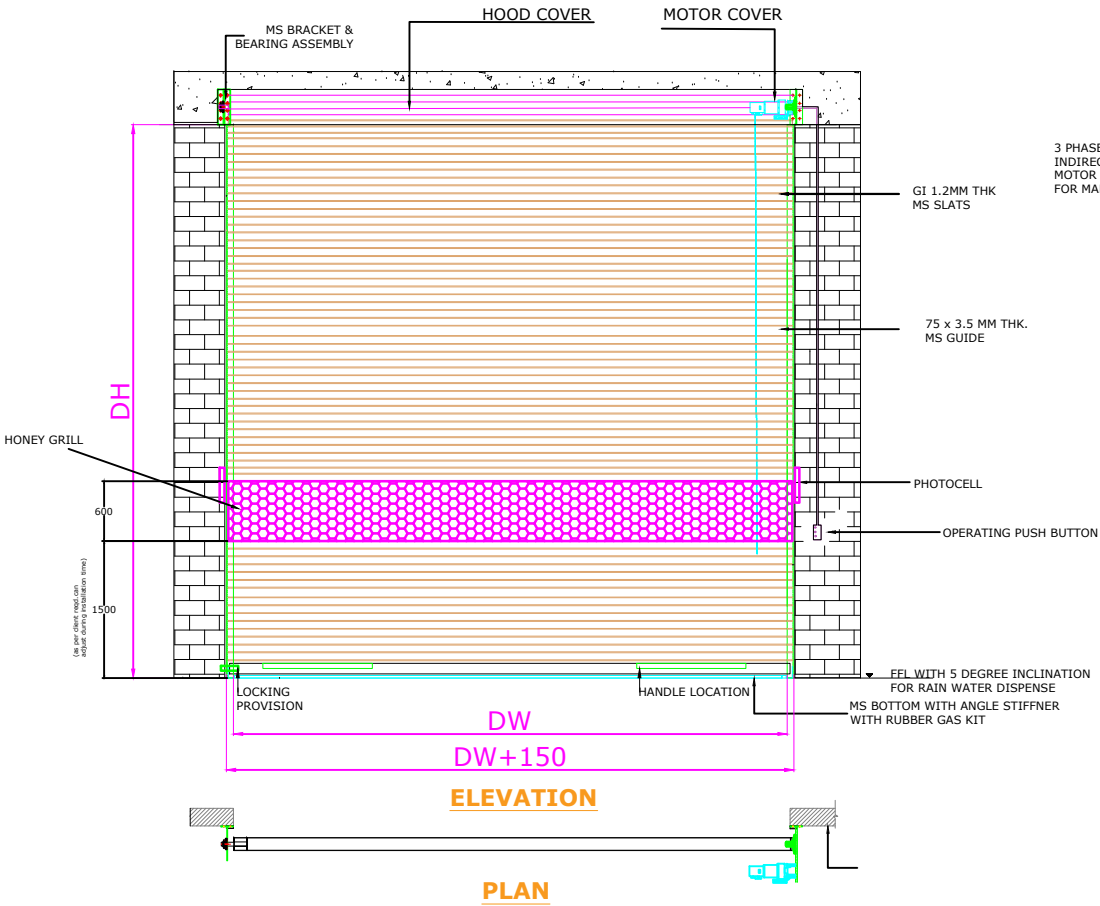


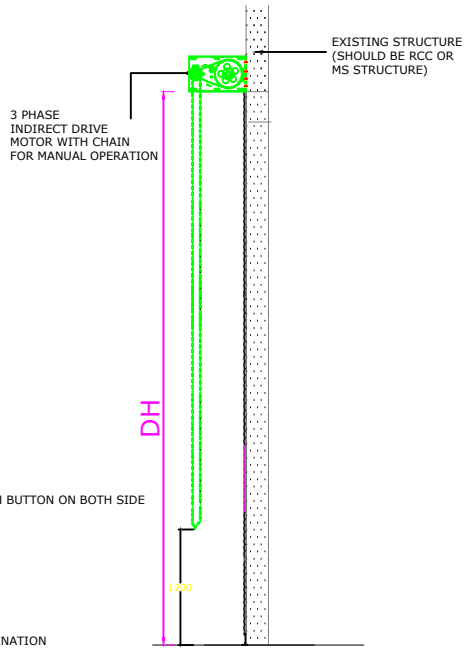

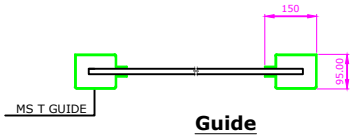

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	G.I. 1.2 mm Motorised Rolling Shutter- InDirect Drive
2.	Motor	Jieolong make 3 phase motor with Sprocket chain arrangement
3.	Slat	Thickness 1.2 mm Width 75 mm
4.	Bottom Profile	100mm x 2 mm Thk with angle stiffner
5.	Guide Profile	M.S." T" Shaped profile 125 x 32 x 3 mm thick
6.	Motor & Hood Cover	Made of GI Sheet Thickness 0.8 mm
7.	Surface Finish	Powder coated – Tata Blue (RAL 5015)
8.	Accessories	Photocell,Push Button from both side, Loop detectors,Flashlamp

SIZE:-

DW	DH	QTY
4000	4000	1 No.

NOTE:-

1. All dimensions are in MM
2. Required civil work will be in client scope

R1.	Shutter height change from 4.2 to 4 m	29.01.2024
R1.	HONEY GRILL 600MM	29.01.2024

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

CLIENT –TATA MOTORS

PROJECT - Motorised Rolling Shutter

	NAME	DATE
DRAWN	S.J	29/01/2023
CHECK	A.K	29/01/2023
APPRD	V.T	29/01/2023

DWG. NO. - NTPL-210

FORMAT NO. - NIHVA-DD-F-03 | REV.01

SCALE: 01:01 | WT: | SHEET: 01 OF 01

If any queries contact : design1@nihva.com