
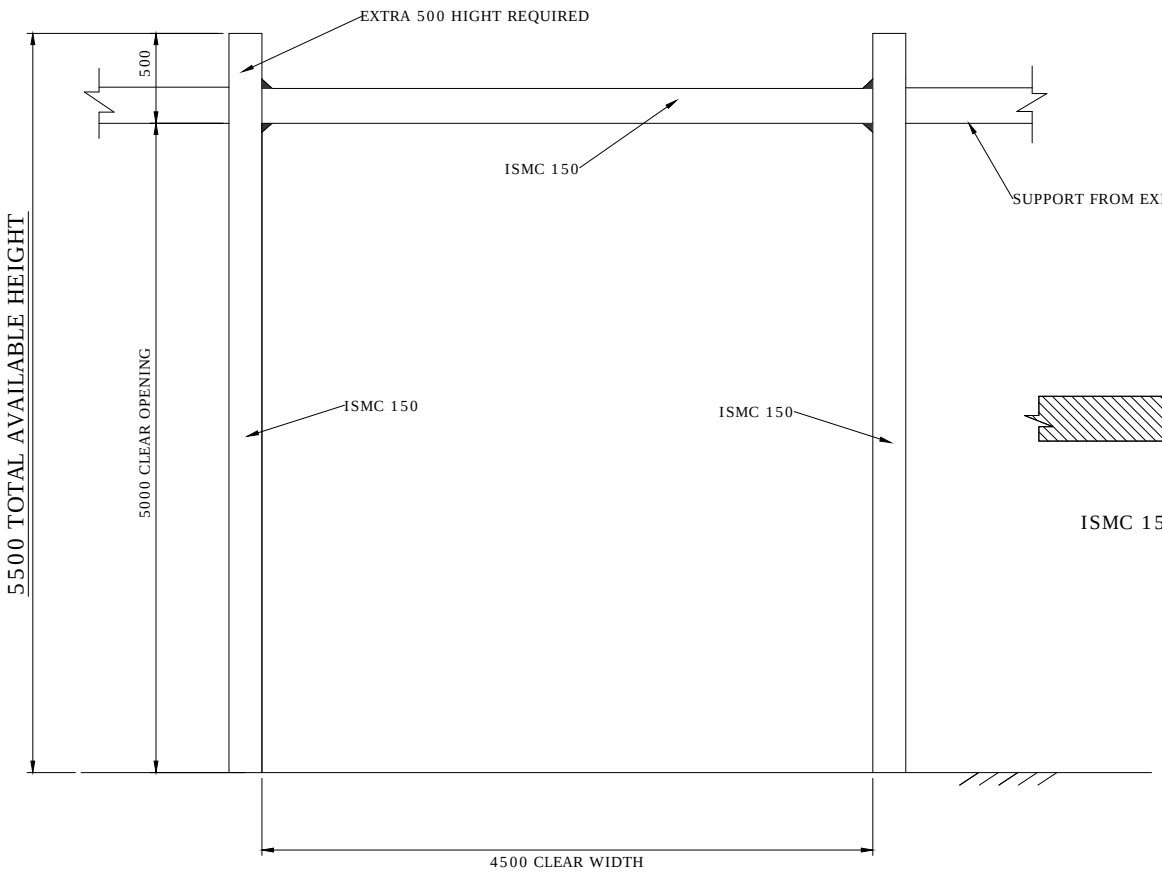


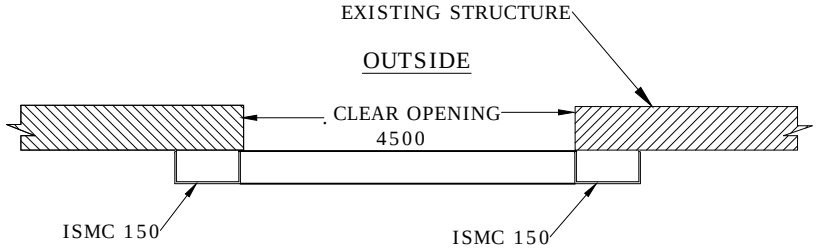

DETAIL VIEW A

(CLEAR OPENING (W)4500X(H)5000)

NOTE: REQUIRED STRUCTURE FOR DOOR SHOULD BE IN CLIENT SCOPE.

structure should be bear approx. 800 k.g. weight. (wind pressure included). While Door is in operation, structure should not be vibrate and bear/sustain all movements of High Speed Doors.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE

STRUCTURE FOR HIGH SPEED DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	SIGN	DATE
DRAWN	ABHIJIT	13/10/15
CHECK	ANIL	13/10/15
ENG		
APPRD.		
MFG		
Ref. No.		

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - SWAROVSKI

PROJECT--

SITE - PUNE

DWG. NO. - NIHVA/15-16/140

SCALE: 01 | WT: | SHEET: 01

If any queries contact : projects@nihva.com