


DOOR OPENING

Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level



Inside Elevation

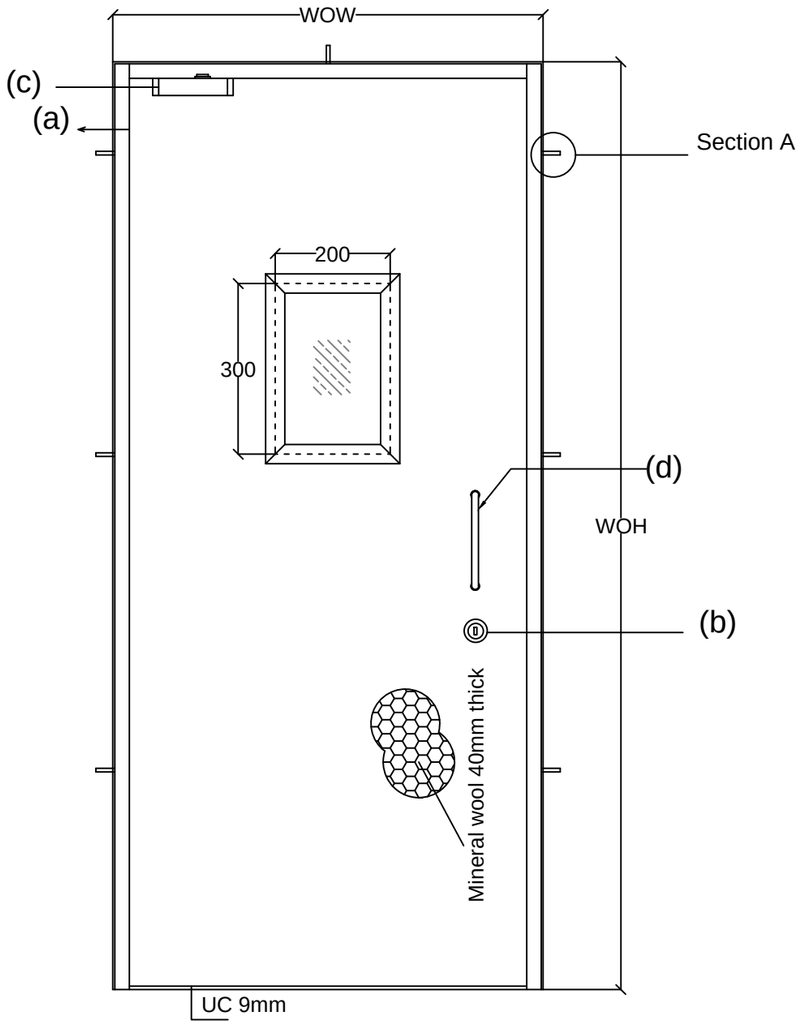

Top View

DOOR OPENING

ASSESORIES DETAILES

(a) HINGES: SS Ball bearing butt hinges.

(b) LOCK: Dead lock with cylinder


(c) DOOR CLOSER: Heavy duty door closure on one side

(d) HANDLE : SS D Handle (1set).

(e) VISION WINDOW: 200 X 300 non fire glass (6mm Thick clear toughened glass)

Shutter thickness : 47 mm
Frame Sheet thick : 1.2mm
Shutter sheet thick : 0.8mm
Fixing : On MS Structure
Paint- Finish blue

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

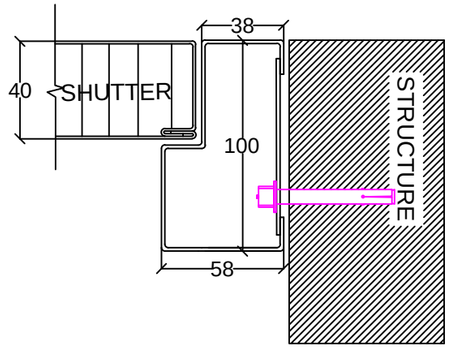

Detail view of Section A

FIRE DOOR SIZES		
WOW	WOH	QUANTITY
830	2030	1

* CLIENT SHOULD MENTION DOOR OPENING POSITION.
* CLIENT SHOULD CONFIRM THE RAL SHADE.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

SINGLE LEAF GENERAL PURPOSE STEEL DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	Ganesh	09/03/22	
CHECK	Pratik	09/03/22	
REV.	00		
APPRD.	A.K.	09/03/22	
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - S.S.GHORPADE
PROJECT -
SITE -
DWG. NO. - NIHVA/21-22/CLT/
SCALE: | WT: | SHEET: 01 OF 01
If any queries contact : design@nihva.com