CLIENT	**:**	**MONOJ WAI**
SITE	**:**	**HYDERABAD**
LOCATION	**:**	**HYDERABAD, INDIA**
NO.	**:**	**-**
DOCUMENT NO.	**:**	**DBR-R00**

R00	04-09-2026	Design report	R.S.R	H.A.B	H.A.B
Rev No.	**Date**	**Description**	**Prepared By**	**Checked By**	**Approved By**

TABLE OF CONTENTS

Sr. No	Contents	Page No.
1	Design Philosophy	3
2	Design Codes and Standards	3
3	Material Specifications Construction	3
4	Load Calculations	4
4.1	Dead Load	4
4.2	Live Load	5
4.3	Wind Load Calculations	5
5	Primary Loads and Load Combinations	6
6	Deflection Check	7
	STAAD OUTPUT	

1. Design Philosophy

This document pertains to structural design of **Roof** for **MANOJ WAI** Located at Hyderabad, India. The overall size of the frame is 2.010 x 14.226 x 1.711M high. The main sliding roof frame is of Aluminium 6063-T6 material. The wind load is worked out from IS 875 Part III. The various DL and LL acting at different points on frame are transferred to the nearest columns through the grid of beams.

The complete frame is modelled as 3D frame and analysed/designed for worst combination of loads through STAAD.pro. Input and output files are enclosed which are self-explanatory. From the STAAD output.

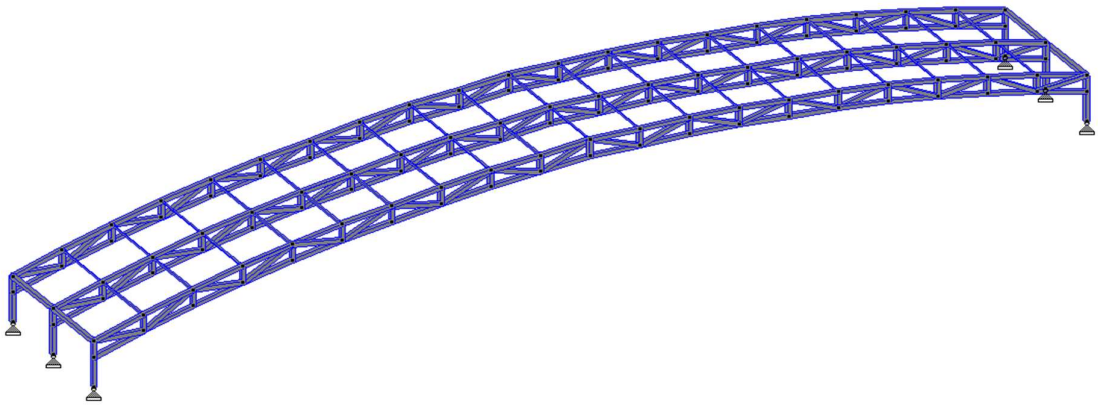


FIG.1 3D MODEL ROOF PANEL

2. DESIGN CODES AND STANDARDS

Code / Standard	Applicability	Remark
IS800-2007	Design of steel structures	--
IS 875-Part II	For live load calculation	--
IS 875-Part III	For wind load calculation	--


3. MATERIAL SPECIFICATION FOR CONSTRUCTION

Sr.no	Material	Specification	Minimum Strength
1	Aluminium	Aluminium 6063-T6	Fy = 214 N/mm^2


4. LOAD CALCULATIONS

4.1 DEAD LOAD

SELFWEIGHT FACTOR = 1.1

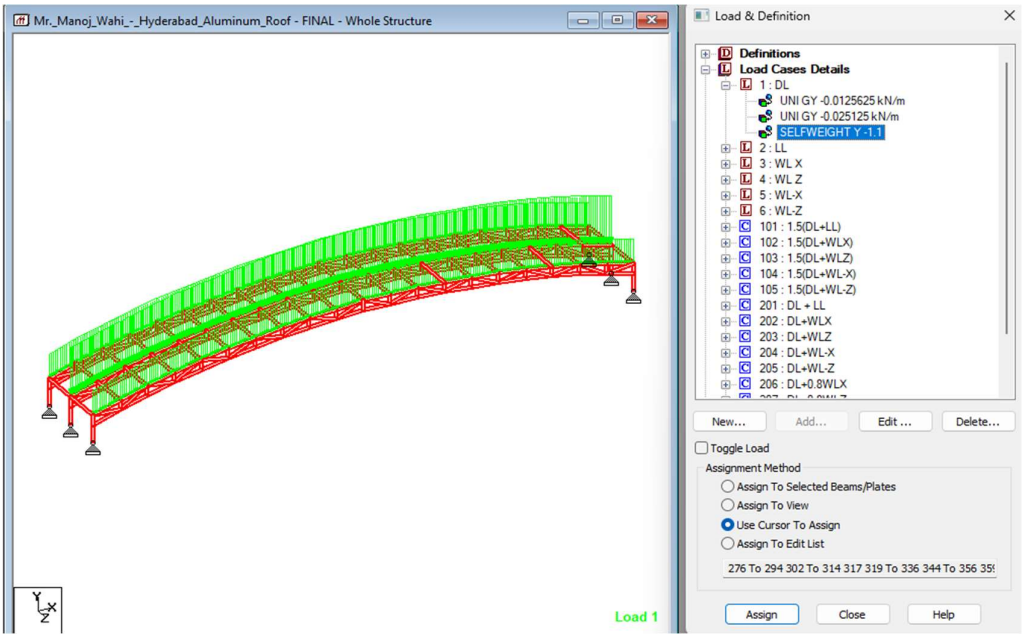


Dead load for glass/sheet assumed = 2.5 Kg/m^2 i.e. 0.025*1.005 = 0.025125 kN/m

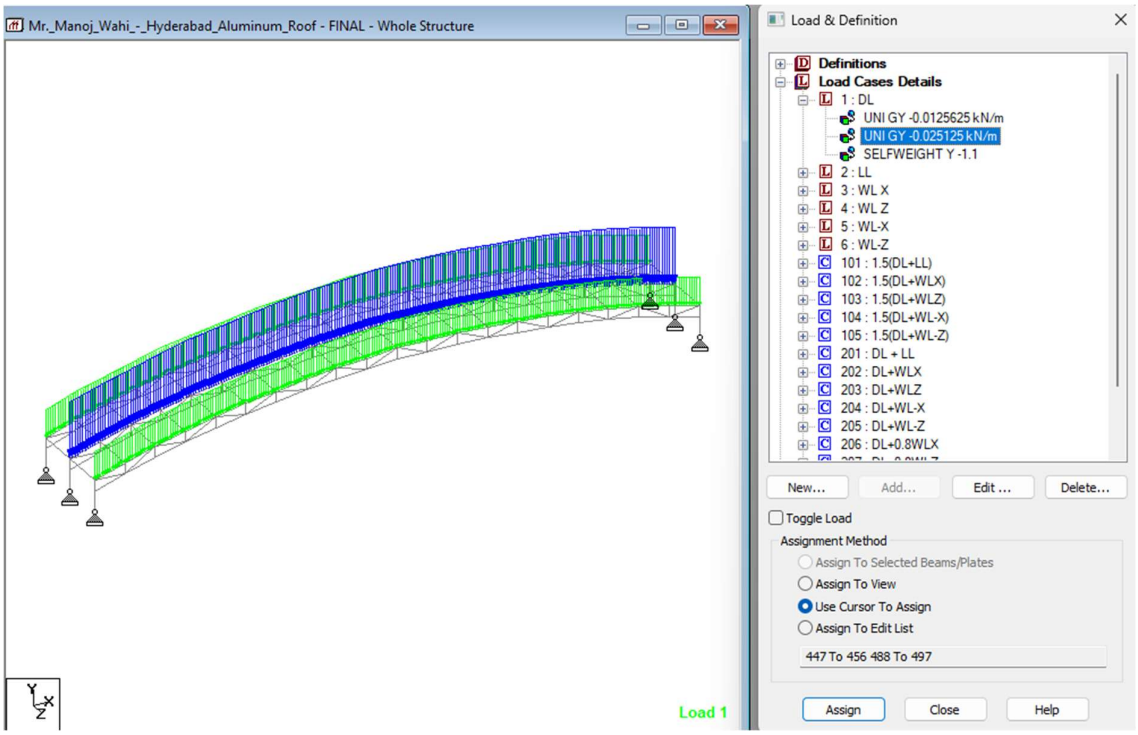

4.2 LIVE LOAD

Live load assumed = 3kN i.e. 3/14.226 = 0.21088 kN/m

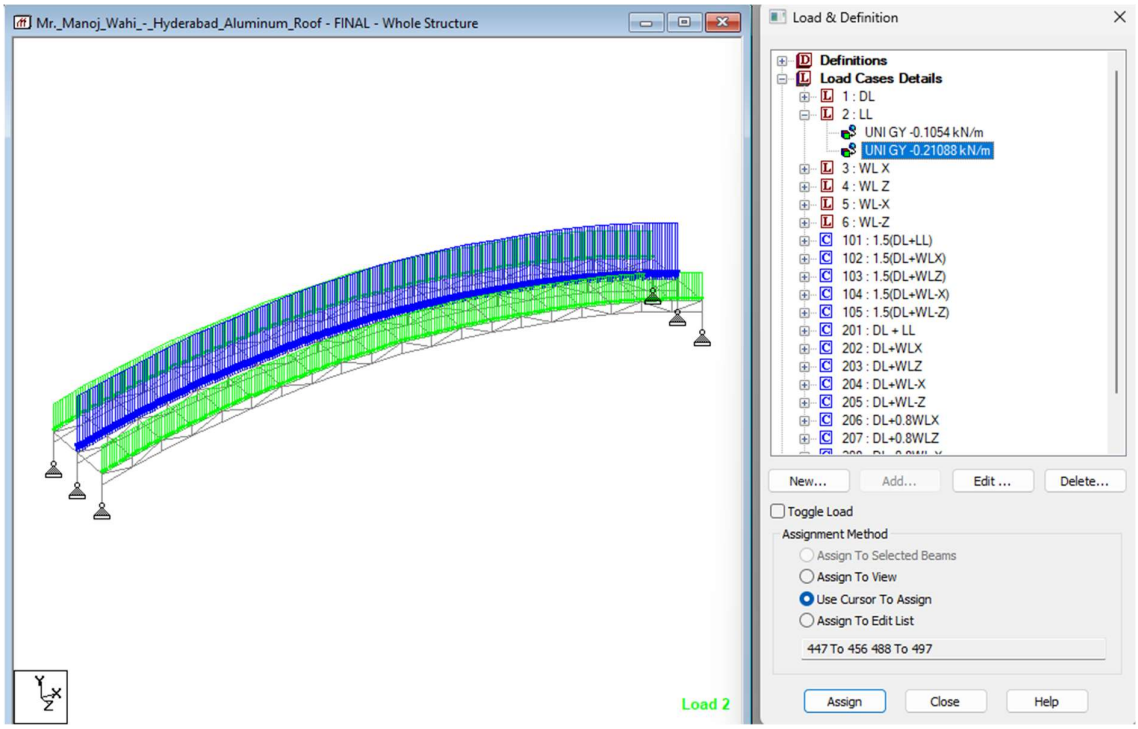


4.3 WIND LOAD


For wind load calculation, following IS code is referred: - "IS 875 Part III"


DESIGN WIND PRESSURE CALCULATION				
Sr no:	**Description**	**Value**	**Unit**	**Remarks**
1	V_b Basic Wind Speed	44	m/s	As per Apendix A (IS-875 Part 3)
2	K1 (risk coefficient)	1		For Design life span of 50 yrs. As per IS 875 Part III (table-1)
3	K2 (Terrain roughness and height factor) select terrain cat.	Catagory1		
	K2 for height 10m	10	1.05	As per IS 875 Part III (table-2), Cat-1, As per Ht
	K2 for height 15m	15	1.09	
4	K3 (topography factor)	1		Clause 6.3.3 IS 875 part III
5	K4 (Importance factor for Cyclonic region.)	1		Clause 6.3.4 IS 875 part III
6	K_a (Area Averaging factor)	0.80		As per IS 875 Part III (table-4)
7	K_d (Wind Directionality Factor)	0.9		Clause 7.2.1 IS 875 part III
8	K_c (Combination Factor)	0.9		Clause 7.3.3.13 IS 875 part III
	Vz=	Vb*K1*K2*K3*K4		
	Vz (For 10m ht)	46.2	**m/s**	Vz= Vb*K1*K2*K3*K4
	Vz (For 15m ht)	47.96	**m/s**	
	Vz (For 20m ht)	49.28	**m/s**	
	Vz (For 30m ht)	50.6	**m/s**	
	Pz (For 10m ht)	1.28	kN/m2	$Pz = 0.6(Vz)^2$
	Pz (For 15m ht)	1.38	kN/m2	
	Ka*Kd*Kc =	0.65		**Use coefficient 0.7**
	Hence Use pd (For 10m Ht)	0.90	kN/m2	
	Hence Use pd (For 15m Ht)	0.97	kN/m2	

Assuming roof of elevated structure,

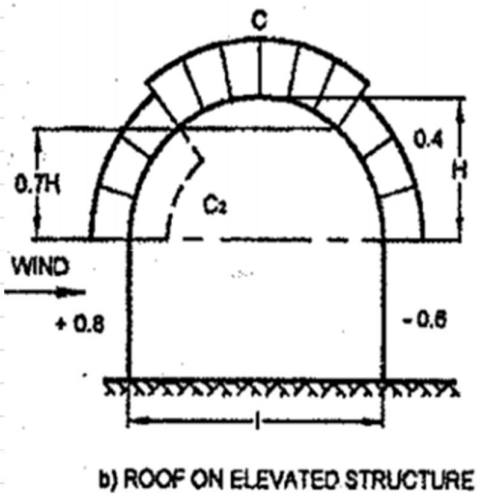

L =	14.226
H =	2.075
H/l =	0.15
C=	-0.846
C2 =	0.049
Assuming center to center spacing of 1 m	
Wind load in area	
C (kN/m)=	-0.82
C2(kN/m)=	0.05
Cpe =	-0.7
Assuming center to center spacing of 1m	
Wind load in area	
Cpe(kN/m)=	-0.68

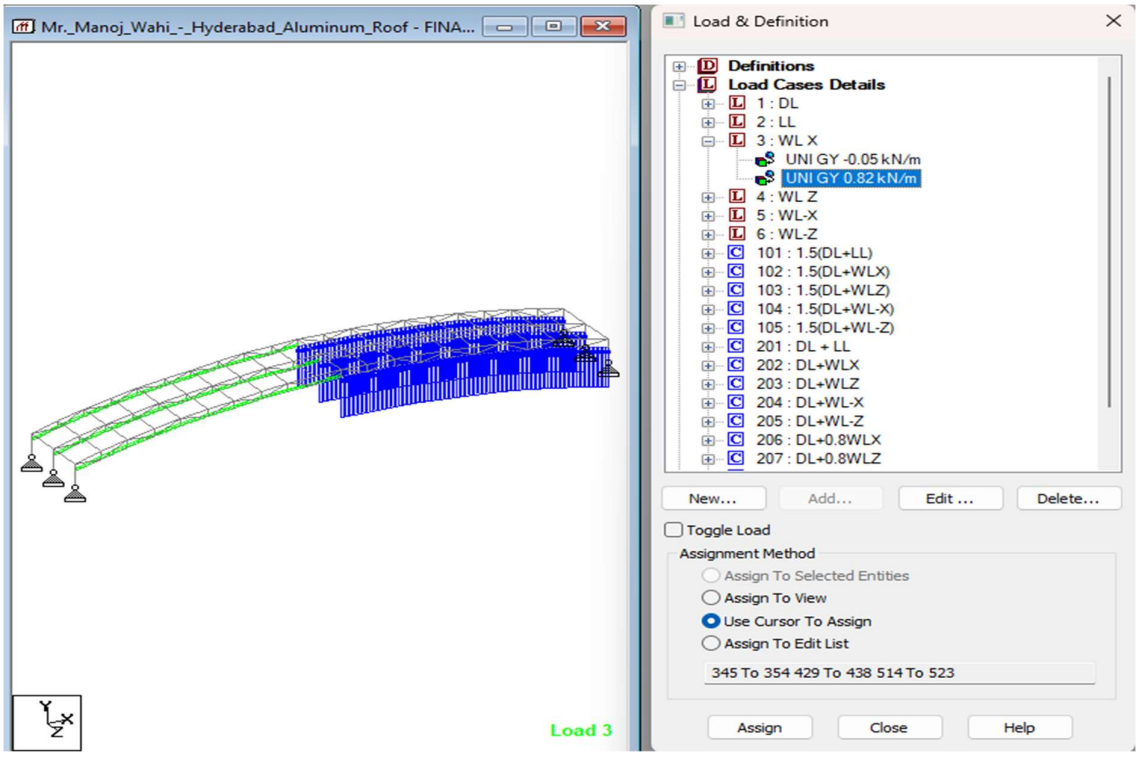
Mr._Manoj_Wahi_-_Hyderabad_Aluminum_Roof - FINA...
Load 3
Load & Definition
Definitions
Load Cases Details
1 : DL
2 : LL
3 : WL X
UNI GY -0.05 kN/m
UNI GY 0.82 kN/m
4 : WL Z
5 : WL-X
6 : WL-Z
101 : 1.5(DL+LL)
102 : 1.5(DL+WLX)
103 : 1.5(DL+WLZ)
104 : 1.5(DL+WL-X)
105 : 1.5(DL+WL-Z)
201 : DL + LL
202 : DL+WLX
203 : DL+WLZ
204 : DL+WL-X
205 : DL+WL-Z
206 : DL+0.8WLX
207 : DL+0.8WLZ
New...
Add...
Edit ...
Delete...
Toggle Load
Assignment Method
Assign To Selected Entities
Assign To View
Use Cursor To Assign
Assign To Edit List
345 To 354 429 To 438 514 To 523
Assign
Close
Help

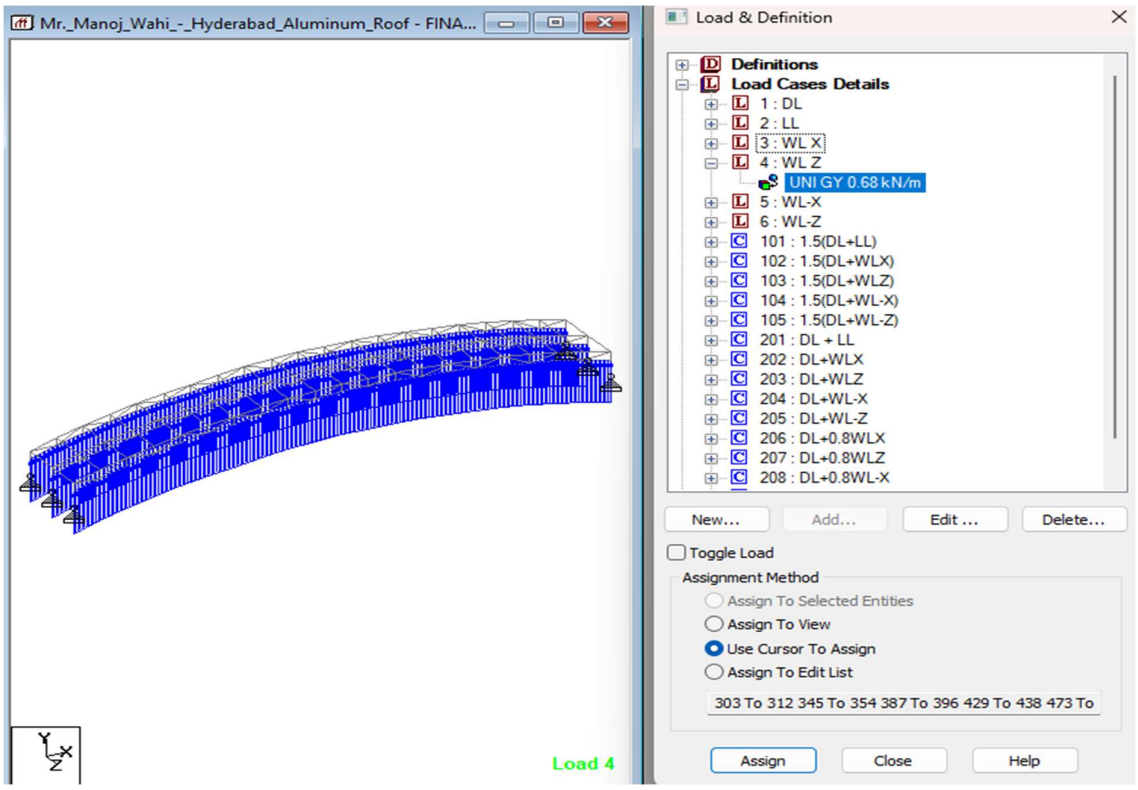
Mr._Manoj_Wahi_-_Hyderabad_Aluminum_Roof - FINA...
Load 4
Load & Definition
Definitions
Load Cases Details
1 : DL
2 : LL
3 : WL X
4 : WL Z
UNI GY 0.68 kN/m
5 : WL-X
6 : WL-Z
101 : 1.5(DL+LL)
102 : 1.5(DL+WLX)
103 : 1.5(DL+WLZ)
104 : 1.5(DL+WL-X)
105 : 1.5(DL+WL-Z)
201 : DL + LL
202 : DL+WLX
203 : DL+WLZ
204 : DL+WL-X
205 : DL+WL-Z
206 : DL+0.8WLX
207 : DL+0.8WLZ
208 : DL+0.8WL-X
New...
Add...
Edit ...
Delete...
Toggle Load
Assignment Method
Assign To Selected Entities
Assign To View
Use Cursor To Assign
Assign To Edit List
303 To 312 345 To 354 387 To 396 429 To 438 473 To
Assign
Close
Help

5. PRIMARY LOADS & LOAD COMBINATIONS

5.1 PRIMARY LOADS

Load 1 Dead Load (DL)

Load 2 Live Load (LL)

Load 3 Wind Load Pressure (WLX)

Load 4 Wind Load Suction (WLZ)

Load 5 Wind Load Suction (WL-X)

Load 6 Wind Load Suction (WL-Z)

5.2 LOAD COMBINATIONS

Load Combination for strength: -

101. 1.5 DL + 1.5 LL
102. 1.5 DL + 1.5 WLX
103. 1.5 DL + 1.5 WLZ
104. 1.5 DL + 1.5 WL-X
105. 1.5 DL + 1.5 WL-Z

Load Combination for serviceability: -

201. DL + LL
202. DL + WLX
203. DL + WLZ
204. DL + WL-X
205. DL + WL-Z
206. DL + 0.8 WLX
207. DL + 0.8 WLZ
208. DL + 0.8 WL-X
209. DL + 0.8 WL-Z

6. Deflection checks at building top in y direction

Refer node no. –122 of Staad file for 203 load cases

Max. Deflection in Y dir. = 50.839 mm < SPAN/250 = (IS 800-2007 table 6)

Refer node no. –200 of Staad file for 200 load cases

Max. Deflection in Y dir. = 21.839 mm < SPAN/250 = (IS 800-2007 table 6)

.... Hence ok.

PAGE NO. 1

STAAD OUTPUT

```
**************************************************
*                                                *
*          STAAD.Pro 2023                        *
*          Version  23.00.03.25                  *
*          Proprietary Program of                *
*          Bentley Systems, Inc.                 *
*          Date=    AUG  4, 2026                 *
*          Time=    16:31: 8                     *
*                                                *

**************************************************



     1. STAAD SPACE
INPUT FILE: E:\2041\L&T\STAAD\DOOR-30X12 M (04.08.2026).STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-22
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER KN
     7. JOINT COORDINATES
     8. 1 0 0 0; 2 30.0001 0 0; 3 0 12 0; 4 30.0001 12 0; 5 10 0 0; 6 20 0 0
     9. 7 10 12 0; 8 20 12 0; 9 0 1.2 0; 10 0 2.4 0; 11 0 3.60001 0; 12 0 4.80001 0
    10. 13 0 6.00001 0; 14 0 7.20001 0; 15 0 8.40002 0; 16 0 9.60002 0; 17 0 10.8 0
    11. 18 5.00001 0 0; 19 5.00001 1.2 0; 20 5.00001 2.4 0; 21 5.00001 3.60001 0
    12. 22 5.00001 4.80001 0; 23 5.00001 6.00001 0; 24 5.00001 7.20001 0
    13. 25 5.00001 8.40002 0; 26 5.00001 9.60002 0; 27 5.00001 10.8 0; 28 5.00001 12 0
    14. 30 25.0001 0 0; 41 25 1.2 0; 42 25 2.4 0; 43 25 3.60001 0; 44 25 4.80001 0
    15. 45 25 6.00001 0; 46 25 7.20001 0; 47 25 8.40002 0; 48 25 9.60002 0
    16. 49 25 10.8 0; 50 25 12 0; 51 15 12 0; 52 15 0 0; 53 30.0001 10.8 0
    17. 54 10 10.8 0; 55 20 10.8 0; 56 15 10.8 0; 57 30.0001 9.60002 0
    18. 58 10 9.60002 0; 59 20 9.60002 0; 60 15 9.60002 0; 61 30.0001 8.40002 0
    19. 62 10 8.40002 0; 63 20 8.40002 0; 64 15 8.40002 0; 65 30.0001 7.20001 0
    20. 66 10 7.20001 0; 67 20 7.20001 0; 68 15 7.20001 0; 69 30.0001 6.00001 0
    21. 70 10 6.00001 0; 71 20 6.00001 0; 72 15 6.00001 0; 73 30.0001 4.80001 0
    22. 74 10 4.80001 0; 75 20 4.80001 0; 76 15 4.80001 0; 77 30.0001 3.60001 0
    23. 78 10 3.60001 0; 79 20 3.60001 0; 80 15 3.60001 0; 81 30.0001 2.4 0
    24. 82 10 2.4 0; 83 20 2.4 0; 84 15 2.4 0; 85 10 1.2 0; 86 15 1.2 0; 87 20 1.2 0
    25. 88 30.0001 1.2 0; 89 3.75001 10.8 0; 90 13.75 10.8 0; 91 23.75 10.8 0
    26. 92 6.25001 10.8 0; 93 26.25 10.8 0; 94 16.25 10.8 0; 95 2.50002 9.60002 0
    27. 96 12.5 9.60002 0; 97 22.5 9.60002 0; 98 7.49999 9.60002 0; 99 27.5 9.60002 0
    28. 100 17.5 9.60002 0; 101 1.25002 8.40002 0; 102 11.25 8.40002 0
    29. 103 21.25 8.40002 0; 104 8.74999 8.40002 0; 105 28.7501 8.40002 0
    30. 106 18.75 8.40002 0; 107 1.66667 6.00001 0; 108 11.6667 6.00001 0
    31. 109 21.6667 6.00001 0; 110 8.33334 6.00001 0; 111 28.3334 6.00001 0
    32. 112 18.3333 6.00001 0; 113 3.33334 4.80001 0; 114 13.3333 4.80001 0
    33. 115 23.3333 4.80001 0; 116 6.66667 4.80001 0; 117 26.6667 4.80001 0
    34. 118 16.6667 4.80001 0; 119 3.33333 2.4 0; 120 13.3333 2.4 0; 121 23.3333 2.4 0
    35. 122 6.66668 2.4 0; 123 26.6667 2.4 0; 124 16.6667 2.4 0; 125 1.66667 1.2 0
    36. 126 11.6667 1.2 0; 127 21.6667 1.2 0; 128 8.33334 1.2 0; 129 28.3334 1.2 0
    37. 130 18.3333 1.2 0
    38. MEMBER INCIDENCES
```

```
39. 1 1 18; 2 1 9; 3 2 88; 4 3 28; 5 5 52; 6 6 30; 7 7 51; 8 5 85; 9 8 50; 10 6 87
40. 11 9 10; 12 10 11; 13 11 12; 14 12 13; 15 13 14; 16 14 15; 17 15 16; 18 16 17
41. 19 17 3; 20 18 5; 21 18 19; 22 19 20; 23 20 21; 24 21 22; 25 22 23; 26 23 24
42. 27 24 25; 28 25 26; 29 26 27; 30 28 7; 31 27 28; 33 30 2; 45 30 41; 46 41 42
43. 47 42 43; 48 43 44; 49 44 45; 50 45 46; 51 46 47; 52 47 48; 53 48 49; 54 50 4
44. 55 49 50; 56 51 8; 57 52 6; 58 51 56; 59 53 4; 60 54 7; 61 55 8; 62 56 60
45. 63 17 89; 64 54 90; 65 55 91; 66 27 92; 67 49 93; 68 56 94; 69 57 53; 70 58 54
46. 71 59 55; 72 60 64; 73 16 95; 74 58 96; 75 59 97; 76 26 98; 77 48 99
47. 78 60 100; 79 61 57; 80 62 58; 81 63 59; 82 64 68; 83 15 101; 84 62 102
48. 85 63 103; 86 25 104; 87 47 105; 88 64 106; 89 65 61; 90 66 62; 91 67 63
49. 92 68 72; 93 14 24; 94 66 68; 95 67 46; 96 24 66; 97 46 65; 98 68 67; 99 69 65
50. 100 70 66; 101 71 67; 102 72 76; 103 13 107; 104 70 108; 105 71 109
51. 106 23 110; 107 45 111; 108 72 112; 109 73 69; 110 74 70; 111 75 71; 112 76 80
52. 113 12 113; 114 74 114; 115 75 115; 116 22 116; 117 44 117; 118 76 118
53. 119 77 73; 120 78 74; 121 79 75; 122 80 84; 123 11 21; 124 78 80; 125 79 43
54. 126 21 78; 127 43 77; 128 80 79; 129 81 77; 130 82 78; 131 83 79; 132 84 86
55. 133 10 119; 134 82 120; 135 83 121; 136 20 122; 137 42 123; 138 84 124
56. 139 9 125; 140 85 82; 141 86 52; 142 85 126; 143 87 83; 144 87 127; 145 19 128
57. 146 88 81; 147 41 129; 148 86 130; 149 28 89; 150 14 107; 151 21 119
58. 152 28 92; 153 66 110; 154 21 122; 155 51 90; 156 66 108; 157 80 120
59. 158 51 94; 159 67 112; 160 80 124; 161 50 91; 162 67 109; 163 43 121
60. 164 50 93; 165 65 111; 166 43 123; 167 89 27; 168 90 56; 169 91 49; 170 92 54
61. 171 93 53; 172 94 55; 173 95 26; 174 96 60; 175 97 48; 176 98 58; 177 99 57
62. 178 100 59; 179 101 25; 180 102 64; 181 103 47; 182 104 62; 183 105 61
63. 184 106 63; 185 107 23; 186 108 72; 187 109 45; 188 110 70; 189 111 69
64. 190 112 71; 191 113 22; 192 114 76; 193 115 44; 194 116 74; 195 117 73
65. 196 118 75; 197 119 20; 198 120 84; 199 121 42; 200 122 82; 201 123 81
66. 202 124 83; 203 125 19; 204 126 86; 205 127 41; 206 128 85; 207 129 88
67. 208 130 87; 209 101 14; 210 95 101; 211 89 95; 212 113 21; 213 107 113
68. 214 125 1; 215 119 125; 216 104 66; 217 98 104; 218 92 98; 219 116 21
69. 220 110 116; 221 128 5; 222 122 128; 223 102 66; 224 96 102; 225 90 96
70. 226 114 80; 227 108 114; 228 126 5; 229 120 126; 230 106 67; 231 100 106
71. 232 94 100; 233 118 80; 234 112 118; 235 130 6; 236 124 130; 237 103 67
72. 238 97 103; 239 91 97; 240 115 43; 241 109 115; 242 127 6; 243 121 127
73. 244 105 65; 245 99 105; 246 93 99; 247 117 43; 248 111 117; 249 129 2
74. 250 123 129
75. START GROUP DEFINITION
76. FLOOR
77. _SHEET 1 TO 31 33 45 TO 148 167 TO 208
78. END GROUP DEFINITION
79. SUPPORTS
80. 1 2 5 6 PINNED
81. 3 4 7 8 FIXED BUT FY MX MY MZ
82. DEFINE MATERIAL START
83. ISOTROPIC ALUMINUM
84. E 6.89473E+07
85. POISSON 0.33
86. DENSITY 26.6017
87. ALPHA 1.28E-05
88. DAMP 0.03
89. ISOTROPIC STEEL
90. E 1.99947E+08
91. POISSON 0.3
92. DENSITY 76.8191
93. ALPHA 6.5E-06
94. DAMP 0.03
```

STAAD SPACE -- PAGE NO. 3

```
 95. TYPE STEEL
 96. STRENGTH RY 1.5 RT 1.2
 97. END DEFINE MATERIAL
 98. MEMBER PROPERTY INDIAN
 99. 63 TO 68 73 TO 78 83 TO 88 93 TO 98 103 TO 108 113 TO 118 123 TO 128 -
100. 133 TO 139 142 144 145 147 148 167 TO 208 TABLE LD ISA100X100X8 SP 0.4

***  WARNING : THE SPACING BETWEEN THE DOUBLE ANGLES SEEMS
               EXCESSIVE (     15.75 IN.). PLEASE CHECK THE LENGTH UNITS.

101. 149 TO 166 209 TO 250 TABLE ST ISA90X90X8
102. MEMBER PROPERTY INDIAN
103. 2 3 11 TO 19 59 69 79 89 99 109 119 129 146 TABLE ST ISMC400
104. 1 4 TO 10 20 TO 31 33 45 TO 58 60 TO 62 70 TO 72 80 TO 82 90 TO 92 -
105. 100 TO 102 110 TO 112 120 TO 122 130 TO 132 140 141 143 TABLE FR ISMC400
106. CONSTANTS
107. BETA 90 MEMB 1 TO 31 33 45 TO 62 69 TO 72 79 TO 82 89 TO 92 99 TO 102 109 -
108. 110 TO 112 119 TO 122 129 TO 132 140 141 143 146
109. MATERIAL STEEL ALL
110. MEMBER RELEASE
111. 63 TO 68 73 TO 78 83 TO 88 93 TO 98 103 TO 108 113 TO 118 123 TO 128 -
112. 133 TO 139 142 144 145 147 148 START MY MZ
113. 93 TO 98 123 TO 128 167 TO 208 END MY MZ
114. DEFINE WIND LOAD

*** NOTE: If any floor diaphragm is present in the model Wind Load definition
          should be defined after Floor Diaphragm definition. Otherwise wind
          load generation may be unsuccessful during analysis.

115. TYPE 1 WIND 1
116. <! STAAD PRO GENERATED DATA DO NOT MODIFY !!!
117. IS875-2015:PARAMS 0 0 0 0.000 0.000 5.000 0 50.000 0 1.000 0 0 1.000 2 1.000 -
118. 1.000 0 0.000 0.000 0.000 0 0 0 1.000 0 0 0.200 1.000 0 1.000 1.000 1.000
119. !> END GENERATED DATA BLOCK
120. INT 1.11 1.23 1.27 1.4 1.52 1.71 HEIG  10  20  25  30  50  100
121. LOAD 1 LOADTYPE DEAD  TITLE DL
122. SELFWEIGHT Y -1.1
123. ONEWAY LOAD
124. _SHEET ONE -0.1 GY
**NOTE** about Floor/OneWay Loads/Weights.
  Please note that depending on the shape of the floor you may
  have to break up the FLOOR/ONEWAY LOAD into multiple commands.
  For details please refer to Technical Reference Manual
  Section 5.32.4.2 Note d and/or "5.32.4.3 Note f.

125. MEMBER LOAD
126. 1 33 CON GY -2.5
127. LOAD 2 LOADTYPE DEAD  TITLE LL
128. LOAD 3 LOADTYPE WIND  TITLE WLX
129. LOAD 4 LOADTYPE WIND  TITLE WLZ
130. MEMBER LOAD
131. 8 10 21 TO 29 31 45 TO 53 55 58 60 TO 62 70 TO 72 80 TO 82 90 TO 92 -
132. 100 TO 102 110 TO 112 120 TO 122 130 TO 132 140 141 143 UNI GZ -9.05
```

```
133. 2 3 11 TO 19 59 69 79 89 99 109 119 129 146 UNI GZ -4.53
134. LOAD COMB 101 1.5(DL+LL)
135. 1 1.5 2 1.5
136. LOAD COMB 102 1.5(DL+WLX)
137. 1 1.5 3 1.5
138. LOAD COMB 103 1.5(DL+WLZ)
139. 1 1.5 4 1.5
140. LOAD COMB 201 DL + LL
141. 1 1.0 2 1.0
142. LOAD COMB 202 DL+WLX
143. 1 1.0 3 1.0
144. LOAD COMB 203 DL+WLZ
145. 1 1.0 4 1.0
146. LOAD COMB 206 DL+0.8WLX
147. 1 1.0 3 0.8
148. LOAD COMB 207 DL+0.8WLZ
149. 1 1.0 4 0.8
150. PERFORM ANALYSIS PRINT ALL


         P R O B L E M   S T A T I S T I C S
         -----------------------------------

  NUMBER OF JOINTS        119  NUMBER OF MEMBERS     238
  NUMBER OF PLATES          0  NUMBER OF SOLIDS        0
  NUMBER OF SURFACES        0  NUMBER OF SUPPORTS      8

        Using 64-bit analysis engine.

        SOLVER USED IS THE IN-CORE ADVANCED MATH SOLVER

TOTAL      PRIMARY LOAD CASES =     4, TOTAL DEGREES OF FREEDOM =     694
TOTAL LOAD COMBINATION  CASES =     8  SO FAR.
```

STAAD SPACE -- PAGE NO. 5

LOADING 1 LOADTYPE DEAD TITLE DL

SELFWEIGHT Y -1.100

ACTUAL WEIGHT OF THE STRUCTURE = 205.517 KN

MEMBER LOAD - UNIT KN METE

MEMBER	UDL	L1	L2	CON	L	LIN1	LIN2
1	-0.0600 GY	0.00	5.00				
203	-0.0600 GY	0.00	3.33				
139	-0.0600 GY	0.00	1.67				
207	-0.0600 GY	0.00	1.67				
147	-0.0600 GY	0.00	3.33				
33	-0.0000 GY	0.00	5.00				
33	-0.0600 GY	0.00	5.00				
4	-0.0600 GY	0.00	5.00				
167	-0.0600 GY	0.00	1.25				
63	-0.0600 GY	0.00	3.75				
5	-0.0600 GY	0.00	5.00				
204	-0.0600 GY	0.00	3.33				
142	-0.0600 GY	0.00	1.67				
6	-0.0600 GY	0.00	5.00				
205	-0.0000 GY	0.00	3.33				
205	-0.0600 GY	0.00	3.33				
144	-0.0600 GY	0.00	1.67				
7	-0.0600 GY	0.00	5.00				
168	-0.0600 GY	0.00	1.25				
64	-0.0600 GY	0.00	3.75				
206	-0.0600 GY	0.00	1.67				
145	-0.0600 GY	0.00	3.33				
20	-0.0600 GY	0.00	5.00				
9	-0.0600 GY	0.00	5.00				
169	-0.0600 GY	0.00	1.25				
65	-0.0600 GY	0.00	3.75				
208	-0.0600 GY	0.00	1.67				
148	-0.0600 GY	0.00	3.33				
57	-0.0600 GY	0.00	5.00				
133	-0.0600 GY	0.00	3.33				
197	-0.0600 GY	0.00	1.67				
203	-0.0600 GY	0.00	3.33				
139	-0.0600 GY	0.00	1.67				
123	-0.0600 GY	0.00	5.00				
197	-0.0600 GY	0.00	1.67				
133	-0.0600 GY	0.00	3.33				
113	-0.0600 GY	0.00	3.33				
191	-0.0600 GY	0.00	1.67				
123	-0.0600 GY	0.00	5.00				
103	-0.0600 GY	0.00	1.67				
185	-0.0600 GY	0.00	3.33				
191	-0.0600 GY	0.00	1.67				

113	-0.0600 GY	0.00	3.33
93	-0.0600 GY	0.00	5.00
185	-0.0600 GY	0.00	3.33
103	-0.0600 GY	0.00	1.67
83	-0.0600 GY	0.00	1.25
179	-0.0600 GY	0.00	3.75
93	-0.0600 GY	0.00	5.00
73	-0.0600 GY	0.00	2.50
173	-0.0600 GY	0.00	2.50
179	-0.0600 GY	0.00	3.75
83	-0.0600 GY	0.00	1.25
63	-0.0600 GY	0.00	3.75
167	-0.0600 GY	0.00	1.25
173	-0.0600 GY	0.00	2.50
73	-0.0600 GY	0.00	2.50
136	-0.0600 GY	0.00	1.67
200	-0.0600 GY	0.00	3.33
206	-0.0600 GY	0.00	1.67
145	-0.0600 GY	0.00	3.33
126	-0.0600 GY	0.00	5.00
200	-0.0600 GY	0.00	3.33
136	-0.0600 GY	0.00	1.67
116	-0.0600 GY	0.00	1.67
194	-0.0600 GY	0.00	3.33
126	-0.0600 GY	0.00	5.00
106	-0.0600 GY	0.00	3.33
188	-0.0600 GY	0.00	1.67
194	-0.0600 GY	0.00	3.33
116	-0.0600 GY	0.00	1.67
96	-0.0600 GY	0.00	5.00
188	-0.0600 GY	0.00	1.67
106	-0.0600 GY	0.00	3.33
86	-0.0600 GY	0.00	3.75
182	-0.0600 GY	0.00	1.25
96	-0.0600 GY	0.00	5.00
76	-0.0600 GY	0.00	2.50
176	-0.0600 GY	0.00	2.50
182	-0.0600 GY	0.00	1.25
86	-0.0600 GY	0.00	3.75
66	-0.0600 GY	0.00	1.25
170	-0.0600 GY	0.00	3.75
176	-0.0600 GY	0.00	2.50
76	-0.0600 GY	0.00	2.50
30	-0.0600 GY	0.00	5.00
170	-0.0600 GY	0.00	3.75
66	-0.0600 GY	0.00	1.25
137	-0.0600 GY	0.00	1.67
201	-0.0600 GY	0.00	3.33
207	-0.0600 GY	0.00	1.67
147	-0.0600 GY	0.00	3.33
199	-0.0600 GY	0.00	1.67
135	-0.0600 GY	0.00	3.33
144	-0.0600 GY	0.00	1.67
205	-0.0600 GY	0.00	3.33
125	-0.0600 GY	0.00	5.00
135	-0.0600 GY	0.00	3.33

199	-0.0600 GY	0.00	1.67
127	-0.0600 GY	0.00	5.00
201	-0.0600 GY	0.00	3.33
137	-0.0600 GY	0.00	1.67
117	-0.0600 GY	0.00	1.67
195	-0.0600 GY	0.00	3.33
127	-0.0600 GY	0.00	5.00
193	-0.0600 GY	0.00	1.67
115	-0.0600 GY	0.00	3.33
125	-0.0600 GY	0.00	5.00
107	-0.0600 GY	0.00	3.33
189	-0.0600 GY	0.00	1.67
195	-0.0600 GY	0.00	3.33
117	-0.0600 GY	0.00	1.67
187	-0.0600 GY	0.00	3.33
105	-0.0600 GY	0.00	1.67
115	-0.0600 GY	0.00	3.33
193	-0.0600 GY	0.00	1.67
95	-0.0600 GY	0.00	5.00
105	-0.0600 GY	0.00	1.67
187	-0.0600 GY	0.00	3.33
97	-0.0600 GY	0.00	5.00
189	-0.0600 GY	0.00	1.67
107	-0.0600 GY	0.00	3.33
87	-0.0600 GY	0.00	3.75
183	-0.0600 GY	0.00	1.25
97	-0.0600 GY	0.00	5.00
181	-0.0600 GY	0.00	3.75
85	-0.0600 GY	0.00	1.25
95	-0.0600 GY	0.00	5.00
77	-0.0600 GY	0.00	2.50
177	-0.0600 GY	0.00	2.50
183	-0.0600 GY	0.00	1.25
87	-0.0600 GY	0.00	3.75
175	-0.0600 GY	0.00	2.50
75	-0.0600 GY	0.00	2.50
85	-0.0600 GY	0.00	1.25
181	-0.0600 GY	0.00	3.75
67	-0.0600 GY	0.00	1.25
171	-0.0600 GY	0.00	3.75
177	-0.0600 GY	0.00	2.50
77	-0.0600 GY	0.00	2.50
169	-0.0600 GY	0.00	1.25
65	-0.0600 GY	0.00	3.75
75	-0.0600 GY	0.00	2.50
175	-0.0600 GY	0.00	2.50
54	-0.0600 GY	0.00	5.00
171	-0.0600 GY	0.00	3.75
67	-0.0600 GY	0.00	1.25
56	-0.0600 GY	0.00	5.00
172	-0.0600 GY	0.00	3.75
68	-0.0600 GY	0.00	1.25
78	-0.0600 GY	0.00	2.50
178	-0.0600 GY	0.00	2.50
172	-0.0600 GY	0.00	3.75
68	-0.0600 GY	0.00	1.25

174	-0.0600 GY	0.00	2.50
74	-0.0600 GY	0.00	2.50
64	-0.0600 GY	0.00	3.75
168	-0.0600 GY	0.00	1.25
88	-0.0600 GY	0.00	3.75
184	-0.0600 GY	0.00	1.25
178	-0.0600 GY	0.00	2.50
78	-0.0600 GY	0.00	2.50
180	-0.0600 GY	0.00	3.75
84	-0.0600 GY	0.00	1.25
74	-0.0600 GY	0.00	2.50
174	-0.0600 GY	0.00	2.50
94	-0.0600 GY	0.00	5.00
84	-0.0600 GY	0.00	1.25
180	-0.0600 GY	0.00	3.75
98	-0.0600 GY	0.00	5.00
184	-0.0600 GY	0.00	1.25
88	-0.0600 GY	0.00	3.75
108	-0.0600 GY	0.00	3.33
190	-0.0600 GY	0.00	1.67
98	-0.0600 GY	0.00	5.00
186	-0.0600 GY	0.00	3.33
104	-0.0600 GY	0.00	1.67
94	-0.0600 GY	0.00	5.00
118	-0.0600 GY	0.00	1.67
196	-0.0600 GY	0.00	3.33
190	-0.0600 GY	0.00	1.67
108	-0.0600 GY	0.00	3.33
192	-0.0600 GY	0.00	1.67
114	-0.0600 GY	0.00	3.33
104	-0.0600 GY	0.00	1.67
186	-0.0600 GY	0.00	3.33
124	-0.0600 GY	0.00	5.00
114	-0.0600 GY	0.00	3.33
192	-0.0600 GY	0.00	1.67
128	-0.0600 GY	0.00	5.00
196	-0.0600 GY	0.00	3.33
118	-0.0600 GY	0.00	1.67
138	-0.0600 GY	0.00	1.67
202	-0.0600 GY	0.00	3.33
128	-0.0600 GY	0.00	5.00
198	-0.0600 GY	0.00	1.67
134	-0.0600 GY	0.00	3.33
124	-0.0600 GY	0.00	5.00
148	-0.0600 GY	0.00	3.33
208	-0.0600 GY	0.00	1.67
202	-0.0600 GY	0.00	3.33
138	-0.0600 GY	0.00	1.67
204	-0.0600 GY	0.00	3.33
142	-0.0600 GY	0.00	1.67
134	-0.0600 GY	0.00	3.33
198	-0.0600 GY	0.00	1.67

STAAD SPACE -- PAGE NO. 9

MEMBER LOAD - UNIT KN METE

MEMBER	UDL	L1	L2	CON	L	LIN1	LIN2
1				-2.5000 GY	2.50		
33				-2.5000 GY	2.50		

LOADING 2 LOADTYPE DEAD TITLE LL

LOADING 3 LOADTYPE WIND TITLE WLX

LOADING 4 LOADTYPE WIND TITLE WLZ

MEMBER LOAD - UNIT KN METE

MEMBER	UDL	L1	L2	CON	L	LIN1	LIN2
8	-9.0500 GZ	0.00	1.20				
10	-9.0500 GZ	0.00	1.20				
21	-9.0500 GZ	0.00	1.20				
22	-9.0500 GZ	0.00	1.20				
23	-9.0500 GZ	0.00	1.20				
24	-9.0500 GZ	0.00	1.20				
25	-9.0500 GZ	0.00	1.20				
26	-9.0500 GZ	0.00	1.20				
27	-9.0500 GZ	0.00	1.20				
28	-9.0500 GZ	0.00	1.20				
29	-9.0500 GZ	0.00	1.20				
31	-9.0500 GZ	0.00	1.20				
45	-9.0500 GZ	0.00	1.20				
46	-9.0500 GZ	0.00	1.20				
47	-9.0500 GZ	0.00	1.20				
48	-9.0500 GZ	0.00	1.20				
49	-9.0500 GZ	0.00	1.20				
50	-9.0500 GZ	0.00	1.20				
51	-9.0500 GZ	0.00	1.20				
52	-9.0500 GZ	0.00	1.20				
53	-9.0500 GZ	0.00	1.20				
55	-9.0500 GZ	0.00	1.20				
58	-9.0500 GZ	0.00	1.20				
60	-9.0500 GZ	0.00	1.20				
61	-9.0500 GZ	0.00	1.20				
62	-9.0500 GZ	0.00	1.20				
70	-9.0500 GZ	0.00	1.20				
71	-9.0500 GZ	0.00	1.20				
72	-9.0500 GZ	0.00	1.20				
80	-9.0500 GZ	0.00	1.20				

81	-9.0500	GZ	0.00	1.20
82	-9.0500	GZ	0.00	1.20
90	-9.0500	GZ	0.00	1.20
91	-9.0500	GZ	0.00	1.20
92	-9.0500	GZ	0.00	1.20
100	-9.0500	GZ	0.00	1.20
101	-9.0500	GZ	0.00	1.20
102	-9.0500	GZ	0.00	1.20
110	-9.0500	GZ	0.00	1.20
111	-9.0500	GZ	0.00	1.20
112	-9.0500	GZ	0.00	1.20
120	-9.0500	GZ	0.00	1.20
121	-9.0500	GZ	0.00	1.20
122	-9.0500	GZ	0.00	1.20
130	-9.0500	GZ	0.00	1.20
131	-9.0500	GZ	0.00	1.20
132	-9.0500	GZ	0.00	1.20
140	-9.0500	GZ	0.00	1.20
141	-9.0500	GZ	0.00	1.20
143	-9.0500	GZ	0.00	1.20
2	-4.5300	GZ	0.00	1.20
3	-4.5300	GZ	0.00	1.20
11	-4.5300	GZ	0.00	1.20
12	-4.5300	GZ	0.00	1.20
13	-4.5300	GZ	0.00	1.20
14	-4.5300	GZ	0.00	1.20
15	-4.5300	GZ	0.00	1.20
16	-4.5300	GZ	0.00	1.20
17	-4.5300	GZ	0.00	1.20
18	-4.5300	GZ	0.00	1.20
19	-4.5300	GZ	0.00	1.20
59	-4.5300	GZ	0.00	1.20
69	-4.5300	GZ	0.00	1.20
79	-4.5300	GZ	0.00	1.20
89	-4.5300	GZ	0.00	1.20
99	-4.5300	GZ	0.00	1.20
109	-4.5300	GZ	0.00	1.20
119	-4.5300	GZ	0.00	1.20
129	-4.5300	GZ	0.00	1.20
146	-4.5300	GZ	0.00	1.20

FOR LOADING - 1
APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
1	1.80427E-09	-4.53880E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96709E+00
2	-2.19595E-09	-4.53880E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96708E+00
3	0.00000E+00	-3.16906E+00	0.00000E+00	0.00000E+00	0.00000E+00	-2.37133E+00
4	0.00000E+00	-3.16911E+00	0.00000E+00	0.00000E+00	0.00000E+00	2.37141E+00
5	-2.82402E-09	-6.57759E+00	0.00000E+00	0.00000E+00	0.00000E+00	-1.07953E-05
6	-2.32053E-09	-6.57765E+00	0.00000E+00	0.00000E+00	0.00000E+00	-9.39115E-05
7	0.00000E+00	-6.33810E+00	0.00000E+00	0.00000E+00	0.00000E+00	-9.26656E-06
8	0.00000E+00	-6.33810E+00	0.00000E+00	0.00000E+00	0.00000E+00	1.29301E-06
9	0.00000E+00	-8.85218E-01	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
10	0.00000E+00	-1.12258E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
11	0.00000E+00	-1.59760E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

STAAD SPACE -- PAGE NO. 11

APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
12	0.00000E+00	-1.12258E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
13	0.00000E+00	-8.85218E-01	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
14	-3.14823E-09	-1.81838E+00	0.00000E+00	0.00000E+00	0.00000E+00	-5.43109E-02
15	0.00000E+00	-8.26007E-01	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
16	0.00000E+00	-1.00384E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
17	0.00000E+00	-1.18195E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
18	0.00000E+00	-7.58810E+00	0.00000E+00	0.00000E+00	0.00000E+00	1.56252E+00
19	0.00000E+00	-2.24515E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
20	0.00000E+00	-1.77044E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
21	-9.68250E-09	-3.67418E+00	0.00000E+00	0.00000E+00	0.00000E+00	6.70075E-07
22	0.00000E+00	-1.77043E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
23	0.00000E+00	-2.24515E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
24	0.00000E+00	-3.19520E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
25	0.00000E+00	-2.36392E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
26	0.00000E+00	-2.00768E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
27	0.00000E+00	-1.65199E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
28	0.00000E+00	-6.54017E+00	0.00000E+00	0.00000E+00	0.00000E+00	1.85331E-05
30	3.21249E-12	-7.58816E+00	0.00000E+00	0.00000E+00	0.00000E+00	-1.56240E+00
41	3.21249E-12	-2.24516E+00	0.00000E+00	0.00000E+00	0.00000E+00	-1.08652E-05
42	0.00000E+00	-1.77045E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
43	1.88281E-09	-3.67420E+00	0.00000E+00	0.00000E+00	0.00000E+00	-1.01016E-07
44	0.00000E+00	-1.77044E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
45	0.00000E+00	-2.24516E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
46	0.00000E+00	-3.19522E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
47	0.00000E+00	-2.36394E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
48	0.00000E+00	-2.00768E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
49	0.00000E+00	-1.65199E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
50	-6.25674E-09	-6.54022E+00	0.00000E+00	0.00000E+00	0.00000E+00	-9.70161E-05
51	6.25674E-09	-6.54017E+00	0.00000E+00	0.00000E+00	0.00000E+00	4.04065E-08
52	0.00000E+00	-6.33810E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
53	0.00000E+00	-1.18197E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
54	0.00000E+00	-2.36390E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
55	0.00000E+00	-2.36390E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
56	0.00000E+00	-1.65199E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
57	0.00000E+00	-1.00386E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
58	0.00000E+00	-2.00768E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
59	0.00000E+00	-2.00768E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
60	0.00000E+00	-2.00768E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
61	0.00000E+00	-8.26004E-01	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
62	0.00000E+00	-1.65201E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
63	0.00000E+00	-1.65201E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
64	0.00000E+00	-2.36392E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
65	-4.03640E-09	-1.81840E+00	0.00000E+00	0.00000E+00	0.00000E+00	5.43114E-02
66	-8.07554E-10	-3.63675E+00	0.00000E+00	0.00000E+00	0.00000E+00	-1.03205E-06
67	-9.91324E-09	-3.63676E+00	0.00000E+00	0.00000E+00	0.00000E+00	8.92311E-08
68	0.00000E+00	-3.19520E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
69	0.00000E+00	-8.85222E-01	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
70	0.00000E+00	-1.77044E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
71	0.00000E+00	-1.77044E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
72	0.00000E+00	-2.24514E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
73	0.00000E+00	-1.12259E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
74	0.00000E+00	-2.24515E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
75	0.00000E+00	-2.24514E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00

STAAD SPACE -- PAGE NO. 12

APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
76	0.00000E+00	-1.77044E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
77	0.00000E+00	-1.59762E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
78	0.00000E+00	-3.19520E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
79	0.00000E+00	-3.19520E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
80	-1.88281E-09	-3.67419E+00	0.00000E+00	0.00000E+00	0.00000E+00	1.01016E-07
81	0.00000E+00	-1.12259E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
82	0.00000E+00	-2.24515E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
83	0.00000E+00	-2.24515E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
84	0.00000E+00	-1.77045E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
85	0.00000E+00	-1.77044E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
86	0.00000E+00	-2.24514E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
87	0.00000E+00	-1.77044E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
88	0.00000E+00	-8.85222E-01	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
89	-2.47581E-09	-1.38929E+00	0.00000E+00	0.00000E+00	0.00000E+00	5.94150E-01
90	4.80680E-09	-1.38929E+00	0.00000E+00	0.00000E+00	0.00000E+00	5.94146E-01
91	-1.44994E-09	-1.38929E+00	0.00000E+00	0.00000E+00	0.00000E+00	5.94147E-01
92	3.50170E-09	-1.38929E+00	0.00000E+00	0.00000E+00	0.00000E+00	-5.94143E-01
93	1.44989E-09	-1.38932E+00	0.00000E+00	0.00000E+00	0.00000E+00	-5.94182E-01
94	1.44994E-09	-1.38929E+00	0.00000E+00	0.00000E+00	0.00000E+00	-5.94147E-01
95	-2.47581E-09	-1.38956E+00	0.00000E+00	0.00000E+00	0.00000E+00	7.60316E-06
96	-1.44994E-09	-1.38956E+00	0.00000E+00	0.00000E+00	0.00000E+00	-2.00349E-07
97	-1.44994E-09	-1.38956E+00	0.00000E+00	0.00000E+00	0.00000E+00	1.76779E-07
98	5.06588E-09	-1.38956E+00	0.00000E+00	0.00000E+00	0.00000E+00	-7.72943E-06
99	8.41240E-09	-1.38959E+00	0.00000E+00	0.00000E+00	0.00000E+00	-2.71178E-05
100	1.44994E-09	-1.38956E+00	0.00000E+00	0.00000E+00	0.00000E+00	-5.53906E-07
101	-2.53872E-09	-1.38930E+00	0.00000E+00	0.00000E+00	0.00000E+00	-5.94143E-01
102	-8.76036E-09	-1.38930E+00	0.00000E+00	0.00000E+00	0.00000E+00	-5.94150E-01
103	-8.76036E-09	-1.38930E+00	0.00000E+00	0.00000E+00	0.00000E+00	-5.94149E-01
104	5.12878E-09	-1.38930E+00	0.00000E+00	0.00000E+00	0.00000E+00	5.94141E-01
105	-2.76764E-09	-1.38933E+00	0.00000E+00	0.00000E+00	0.00000E+00	5.94187E-01
106	-3.47341E-09	-1.38930E+00	0.00000E+00	0.00000E+00	0.00000E+00	5.94149E-01
107	-3.60854E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96103E-01
108	-2.22923E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96082E-01
109	-2.22923E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96082E-01
110	9.82219E-10	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96102E-01
111	3.51647E-09	-1.42692E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96117E-01
112	4.54975E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96082E-01
113	-3.60854E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96103E-01
114	-4.54975E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96082E-01
115	-2.22923E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96082E-01
116	-5.17877E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96102E-01
117	3.51647E-09	-1.42692E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96117E-01
118	2.22923E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96082E-01
119	-1.82239E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96098E-01
120	3.96007E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96082E-01
121	3.52236E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96082E-01
122	-8.75529E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96097E-01
123	-2.92679E-09	-1.42692E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96117E-01
124	-3.52236E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96083E-01
125	-1.65728E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96103E-01
126	2.22923E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96082E-01
127	2.22923E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	-3.96082E-01
128	-5.39888E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96101E-01

STAAD SPACE -- PAGE NO. 13

APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
129	-3.51647E-09	-1.42692E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96117E-01
130	-4.54975E-09	-1.42689E+00	0.00000E+00	0.00000E+00	0.00000E+00	3.96082E-01

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 1
LOADTYPE DEAD TITLE DL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.150000380E+02
Y = 0.587556422E+01
Z = 0.000000000E+00

TOTAL APPLIED LOAD 1

***TOTAL APPLIED LOAD (KN METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = -0.00
SUMMATION FORCE-Y = -267.07
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= -4006.05

TOTAL REACTION LOAD 1

***TOTAL REACTION LOAD(KN METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 267.07
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= 4006.05

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 1)

	MAXIMUMS	AT NODE
X =	2.64919E-03	9
Y =	-5.68691E-02	30
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	4.15346E-04	2

EXTERNAL AND INTERNAL JOINT LOAD SUMMARY (KN METE)-

JT	EXT FX/ INT FX	EXT FY/ INT FY	EXT FZ/ INT FZ	EXT MX/ INT MX	EXT MY/ INT MY	EXT MZ/ INT MZ	
							SUPPORT=1
1	0.00	-4.54	0.00	0.00	0.00	-3.97	
	-13.86	-40.09	-0.00	-0.00	-0.00	3.97	111000
2	-0.00	-4.54	0.00	0.00	0.00	3.97	
	13.86	-40.09	-0.00	-0.00	-0.00	-3.97	111000
3	0.00	-3.17	0.00	0.00	0.00	-2.37	
	0.36	3.17	-0.00	-0.00	-0.00	2.37	101000

4	0.00	-3.17	0.00	0.00	0.00	2.37	
	-0.36	3.17	-0.00	-0.00	-0.00	-2.37	101000
5	-0.00	-6.58	0.00	0.00	0.00	-0.00	
	1.90	-82.33	-0.00	-0.00	-0.00	0.00	111000
6	-0.00	-6.58	0.00	0.00	0.00	-0.00	
	-1.90	-82.33	-0.00	-0.00	-0.00	0.00	111000
7	0.00	-6.34	0.00	0.00	0.00	-0.00	
	-0.31	6.34	-0.00	-0.00	-0.00	0.00	101000
8	0.00	-6.34	0.00	0.00	0.00	0.00	
	0.31	6.34	-0.00	-0.00	-0.00	-0.00	101000

FOR LOADING - 2
APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 2
LOADTYPE DEAD TITLE LL

TOTAL APPLIED LOAD 2

***TOTAL APPLIED LOAD (KN METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = 0.0000000E+00
SUMMATION FORCE-Y = 0.0000000E+00
SUMMATION FORCE-Z = 0.0000000E+00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.0000000E+00 MY= 0.0000000E+00 MZ= 0.0000000E+00

TOTAL REACTION LOAD 2

***TOTAL REACTION LOAD(KN METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = 0.0000000E+00
SUMMATION FORCE-Y = 0.0000000E+00
SUMMATION FORCE-Z = 0.0000000E+00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.0000000E+00 MY= 0.0000000E+00 MZ= 0.0000000E+00

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 2)

	MAXIMUMS	AT NODE
X =	0.00000E+00	0
Y =	0.00000E+00	0
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	0.00000E+00	0

EXTERNAL AND INTERNAL JOINT LOAD SUMMARY (KN METE)-

JT	EXT FX/ INT FX	EXT FY/ INT FY	EXT FZ/ INT FZ	EXT MX/ INT MX	EXT MY/ INT MY	EXT MZ/ INT MZ

SUPPORT=1

FOR LOADING - 3

STAAD SPACE -- PAGE NO. 15

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 3
LOADTYPE WIND TITLE WLX

TOTAL APPLIED LOAD 3

***TOTAL APPLIED LOAD (KN METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = 0.0000000E+00
SUMMATION FORCE-Y = 0.0000000E+00
SUMMATION FORCE-Z = 0.0000000E+00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.0000000E+00 MY= 0.0000000E+00 MZ= 0.0000000E+00

TOTAL REACTION LOAD 3

***TOTAL REACTION LOAD(KN METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = 0.0000000E+00
SUMMATION FORCE-Y = 0.0000000E+00
SUMMATION FORCE-Z = 0.0000000E+00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.0000000E+00 MY= 0.0000000E+00 MZ= 0.0000000E+00

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 3)

	MAXIMUMS	AT NODE
X =	0.00000E+00	0
Y =	0.00000E+00	0
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	0.00000E+00	0

EXTERNAL AND INTERNAL JOINT LOAD SUMMARY (KN METE)-

JT EXT FX/ EXT FY/ EXT FZ/ EXT MX/ EXT MY/ EXT MZ/
INT FX INT FY INT FZ INT MX INT MY INT MZ

SUPPORT=1
FOR LOADING - 4
APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
1	0.00000E+00	0.00000E+00	-2.71800E+00	-5.43600E-01	0.00000E+00	0.00000E+00
2	0.00000E+00	0.00000E+00	-2.71800E+00	-5.43600E-01	0.00000E+00	0.00000E+00
3	0.00000E+00	0.00000E+00	-2.71800E+00	5.43600E-01	0.00000E+00	0.00000E+00
4	0.00000E+00	0.00000E+00	-2.71800E+00	5.43600E-01	0.00000E+00	0.00000E+00
5	0.00000E+00	0.00000E+00	-5.43000E+00	-1.08600E+00	0.00000E+00	0.00000E+00
6	0.00000E+00	0.00000E+00	-5.43000E+00	-1.08600E+00	0.00000E+00	0.00000E+00
7	0.00000E+00	0.00000E+00	-5.43000E+00	1.08600E+00	0.00000E+00	0.00000E+00
8	0.00000E+00	0.00000E+00	-5.43000E+00	1.08600E+00	0.00000E+00	0.00000E+00
9	0.00000E+00	0.00000E+00	-5.43600E+00	0.00000E+00	0.00000E+00	0.00000E+00
10	0.00000E+00	0.00000E+00	-5.43602E+00	-9.21269E-06	0.00000E+00	0.00000E+00
11	0.00000E+00	0.00000E+00	-5.43602E+00	9.21269E-06	0.00000E+00	0.00000E+00
12	0.00000E+00	0.00000E+00	-5.43600E+00	0.00000E+00	0.00000E+00	0.00000E+00
13	0.00000E+00	0.00000E+00	-5.43600E+00	0.00000E+00	0.00000E+00	0.00000E+00

STAAD SPACE -- PAGE NO. 16

APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
14	0.00000E+00	0.00000E+00	-5.43602E+00	-8.88944E-06	0.00000E+00	0.00000E+00
15	0.00000E+00	0.00000E+00	-5.43602E+00	8.51231E-06	0.00000E+00	0.00000E+00
16	0.00000E+00	0.00000E+00	-5.43595E+00	1.90180E-05	0.00000E+00	0.00000E+00
17	0.00000E+00	0.00000E+00	-5.43595E+00	-1.90180E-05	0.00000E+00	0.00000E+00
18	0.00000E+00	0.00000E+00	-5.43000E+00	-1.08600E+00	0.00000E+00	0.00000E+00
19	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
20	0.00000E+00	0.00000E+00	-1.08600E+01	-1.84254E-05	0.00000E+00	0.00000E+00
21	0.00000E+00	0.00000E+00	-1.08600E+01	1.84254E-05	0.00000E+00	0.00000E+00
22	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
23	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
24	0.00000E+00	0.00000E+00	-1.08600E+01	-1.77789E-05	0.00000E+00	0.00000E+00
25	0.00000E+00	0.00000E+00	-1.08600E+01	1.70246E-05	0.00000E+00	0.00000E+00
26	0.00000E+00	0.00000E+00	-1.08599E+01	3.79283E-05	0.00000E+00	0.00000E+00
27	0.00000E+00	0.00000E+00	-1.08599E+01	-3.79283E-05	0.00000E+00	0.00000E+00
28	0.00000E+00	0.00000E+00	-5.43000E+00	1.08600E+00	0.00000E+00	0.00000E+00
30	0.00000E+00	0.00000E+00	-5.43000E+00	-1.08600E+00	-9.11960E-05	0.00000E+00
41	0.00000E+00	0.00000E+00	-1.08600E+01	-3.82905E-09	9.11960E-05	0.00000E+00
42	0.00000E+00	0.00000E+00	-1.08600E+01	-1.84254E-05	0.00000E+00	0.00000E+00
43	0.00000E+00	0.00000E+00	-1.08600E+01	1.84254E-05	0.00000E+00	0.00000E+00
44	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
45	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
46	0.00000E+00	0.00000E+00	-1.08600E+01	-1.77789E-05	0.00000E+00	0.00000E+00
47	0.00000E+00	0.00000E+00	-1.08600E+01	1.70246E-05	0.00000E+00	0.00000E+00
48	0.00000E+00	0.00000E+00	-1.08599E+01	3.79283E-05	0.00000E+00	0.00000E+00
49	0.00000E+00	0.00000E+00	-1.08599E+01	-3.79283E-05	0.00000E+00	0.00000E+00
50	0.00000E+00	0.00000E+00	-5.43000E+00	1.08600E+00	0.00000E+00	0.00000E+00
51	0.00000E+00	0.00000E+00	-5.43000E+00	1.08600E+00	0.00000E+00	0.00000E+00
52	0.00000E+00	0.00000E+00	-5.43000E+00	-1.08600E+00	0.00000E+00	0.00000E+00
53	0.00000E+00	0.00000E+00	-5.43595E+00	-1.90180E-05	0.00000E+00	0.00000E+00
54	0.00000E+00	0.00000E+00	-1.08599E+01	-3.79283E-05	0.00000E+00	0.00000E+00
55	0.00000E+00	0.00000E+00	-1.08599E+01	-3.79283E-05	0.00000E+00	0.00000E+00
56	0.00000E+00	0.00000E+00	-1.08599E+01	-3.79283E-05	0.00000E+00	0.00000E+00
57	0.00000E+00	0.00000E+00	-5.43595E+00	1.90180E-05	0.00000E+00	0.00000E+00
58	0.00000E+00	0.00000E+00	-1.08599E+01	3.79283E-05	0.00000E+00	0.00000E+00
59	0.00000E+00	0.00000E+00	-1.08599E+01	3.79283E-05	0.00000E+00	0.00000E+00
60	0.00000E+00	0.00000E+00	-1.08599E+01	3.79283E-05	0.00000E+00	0.00000E+00
61	0.00000E+00	0.00000E+00	-5.43602E+00	8.51231E-06	0.00000E+00	0.00000E+00
62	0.00000E+00	0.00000E+00	-1.08600E+01	1.70246E-05	0.00000E+00	0.00000E+00
63	0.00000E+00	0.00000E+00	-1.08600E+01	1.70246E-05	0.00000E+00	0.00000E+00
64	0.00000E+00	0.00000E+00	-1.08600E+01	1.70246E-05	0.00000E+00	0.00000E+00
65	0.00000E+00	0.00000E+00	-5.43602E+00	-8.88944E-06	0.00000E+00	0.00000E+00
66	0.00000E+00	0.00000E+00	-1.08600E+01	-1.77789E-05	0.00000E+00	0.00000E+00
67	0.00000E+00	0.00000E+00	-1.08600E+01	-1.77789E-05	0.00000E+00	0.00000E+00
68	0.00000E+00	0.00000E+00	-1.08600E+01	-1.77789E-05	0.00000E+00	0.00000E+00
69	0.00000E+00	0.00000E+00	-5.43600E+00	0.00000E+00	0.00000E+00	0.00000E+00
70	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
71	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
72	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
73	0.00000E+00	0.00000E+00	-5.43600E+00	0.00000E+00	0.00000E+00	0.00000E+00
74	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
75	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
76	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
77	0.00000E+00	0.00000E+00	-5.43602E+00	9.21269E-06	0.00000E+00	0.00000E+00

STAAD SPACE -- PAGE NO. 17

APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
78	0.00000E+00	0.00000E+00	-1.08600E+01	1.84254E-05	0.00000E+00	0.00000E+00
79	0.00000E+00	0.00000E+00	-1.08600E+01	1.84254E-05	0.00000E+00	0.00000E+00
80	0.00000E+00	0.00000E+00	-1.08600E+01	1.84254E-05	0.00000E+00	0.00000E+00
81	0.00000E+00	0.00000E+00	-5.43602E+00	-9.21269E-06	0.00000E+00	0.00000E+00
82	0.00000E+00	0.00000E+00	-1.08600E+01	-1.84254E-05	0.00000E+00	0.00000E+00
83	0.00000E+00	0.00000E+00	-1.08600E+01	-1.84254E-05	0.00000E+00	0.00000E+00
84	0.00000E+00	0.00000E+00	-1.08600E+01	-1.84254E-05	0.00000E+00	0.00000E+00
85	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
86	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
87	0.00000E+00	0.00000E+00	-1.08600E+01	0.00000E+00	0.00000E+00	0.00000E+00
88	0.00000E+00	0.00000E+00	-5.43600E+00	0.00000E+00	0.00000E+00	0.00000E+00

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 4
LOADTYPE WIND TITLE WLZ

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.150000110E+02
Y = 0.599999996E+01
Z = -0.000000000E+00

TOTAL APPLIED LOAD 4

***TOTAL APPLIED LOAD (KN METE) SUMMARY (LOADING 4)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = -651.72

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -3910.32 MY= 9775.81 MZ= 0.00

TOTAL REACTION LOAD 4

***TOTAL REACTION LOAD(KN METE) SUMMARY (LOADING 4)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 651.72

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 3910.32 MY= -9775.81 MZ= 0.00

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 4)

	MAXIMUMS	AT NODE
X =	0.00000E+00	0
Y =	0.00000E+00	0
Z =	-5.03360E+00	45
RX=	-1.08157E-02	1
RY=	-3.32842E-03	4
RZ=	0.00000E+00	0

STAAD SPACE -- PAGE NO. 18

EXTERNAL AND INTERNAL JOINT LOAD SUMMARY (KN METE)-

JT	EXT FX/ INT FX	EXT FY/ INT FY	EXT FZ/ INT FZ	EXT MX/ INT MX	EXT MY/ INT MY	EXT MZ/ INT MZ	
							SUPPORT=1
1	0.00	0.00	-2.72	-0.54	0.00	0.00	
	-0.00	-0.00	-43.51	0.54	0.00	-0.00	111000
2	0.00	0.00	-2.72	-0.54	0.00	0.00	
	-0.00	-0.00	-43.51	0.54	-0.00	-0.00	111000
3	0.00	0.00	-2.72	0.54	0.00	0.00	
	-0.00	-0.00	-43.50	-0.54	0.00	-0.00	101000
4	0.00	0.00	-2.72	0.54	0.00	0.00	
	-0.00	-0.00	-43.50	-0.54	0.00	-0.00	101000
5	0.00	0.00	-5.43	-1.09	0.00	0.00	
	-0.00	-0.00	-111.27	1.09	-0.00	-0.00	111000
6	0.00	0.00	-5.43	-1.09	0.00	0.00	
	-0.00	-0.00	-111.27	1.09	-0.00	-0.00	111000
7	0.00	0.00	-5.43	1.09	0.00	0.00	
	-0.00	-0.00	-111.28	-1.09	0.00	-0.00	101000
8	0.00	0.00	-5.43	1.09	0.00	0.00	
	-0.00	-0.00	-111.28	-1.09	0.00	-0.00	101000

LOAD COMBINATION NO. 101
1.5(DL+LL)

LOADING- 1. 2.
FACTOR - 1.50 1.50

LOAD COMBINATION NO. 102
1.5(DL+WLX)

LOADING- 1. 3.
FACTOR - 1.50 1.50

LOAD COMBINATION NO. 103
1.5(DL+WLZ)

LOADING- 1. 4.
FACTOR - 1.50 1.50

LOAD COMBINATION NO. 201
DL + LL

LOADING- 1. 2.
FACTOR - 1.00 1.00

LOAD COMBINATION NO. 202
DL+WLX

LOADING- 1. 3.

STAAD SPACE -- PAGE NO. 19

```
 LOADING-     1.     4.
 FACTOR -   1.00   1.00

   LOAD COMBINATION NO.   206
   DL+0.8WLX

 LOADING-     1.     3.
 FACTOR -   1.00   0.80

   LOAD COMBINATION NO.   207
   DL+0.8WLZ

 LOADING-     1.     4.
 FACTOR -   1.00   0.80


   ************ END OF DATA FROM INTERNAL STORAGE ************


   151. DEFINE ENVELOPE
   152. 101 103 ENVELOPE 1 TYPE STRENGTH
   153. END DEFINE ENVELOPE
   154. PARAMETER 1
   155. CODE IS800 LSD
   156. FU 410000 ALL
   157. FYLD 250000 ALL
   158. STP 1 ALL
   159. CHECK CODE ALL
STEEL DESIGN

 |-------------------------------------------------------------------------------|
 |  Member Number:      1                                                        |
 |  Member Section:  FR   ISMC400              (INDIAN SECTIONS)                 |
 |  Status: PASS  Ratio:   0.516  Critical Load Case:   103  Location:       5.00   |
 |  Critical Condition: Sec. 9.3.1.3                                             |
 |-------------------------------------------------------------------------------|

 |-------------------------------------------------------------------------------|
 |  Member Number:      2                                                        |
 |  Member Section:  ST   ISMC400              (INDIAN SECTIONS)                 |
 |  Status: PASS  Ratio:   0.314  Critical Load Case:   103  Location:       1.20   |
 |  Critical Condition: Sec. 9.3.2.2                                             |
 |-------------------------------------------------------------------------------|
```

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number:	3				
Member Section:	ST ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.314	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.2.2					

Member Number:	4				
Member Section:	FR ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.505	Critical Load Case:	103	Location:	5.00
Critical Condition: Sec. 9.3.1.3					

Member Number:	5				
Member Section:	FR ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.452	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3					

Member Number:	6				
Member Section:	FR ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.496	Critical Load Case:	103	Location:	5.00
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number:	7					
Member Section:	FR ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.450	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

Member Number:	8					
Member Section:	FR ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.288	Critical Load Case:	103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3						

Member Number:	9					
Member Section:	FR ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.500	Critical Load Case:	103	Location:	5.00	
Critical Condition: Sec. 9.3.1.3						

Member Number:	10					
Member Section:	FR ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.288	Critical Load Case:	103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 11					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.497	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.2.2					

Member Number: 12					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.634	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.2.2					

Member Number: 13					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.718	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.2.2					

Member Number: 14					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.746	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.2.2					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 15					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.746	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

Member Number: 16					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.694	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

Member Number: 17					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.607	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

Member Number: 18					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.463	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 19					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.277	Critical Load Case: 103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3					

Member Number: 20					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.496	Critical Load Case: 103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3					

Member Number: 21					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.259	Critical Load Case: 103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3					

Member Number: 22					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.453	Critical Load Case: 103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 23					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.588	Critical Load Case: 103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3					

Member Number: 24					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.676	Critical Load Case: 103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3					

Member Number: 25					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.704	Critical Load Case: 103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3					

Member Number: 26					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.703	Critical Load Case: 103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 27						
Member Section: FR	ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.672	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

Member Number: 28						
Member Section: FR	ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.589	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

Member Number: 29						
Member Section: FR	ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.450	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

Member Number: 30						
Member Section: FR	ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.500	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 31					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.255	Critical Load Case: 103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3					

Member Number: 33					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.516	Critical Load Case: 103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3					

Member Number: 45					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.259	Critical Load Case: 103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3					

Member Number: 46					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.454	Critical Load Case: 103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 47					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.588	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3					

Member Number: 48					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.676	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3					

Member Number: 49					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.704	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3					

Member Number: 50					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.703	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number:	51					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.672	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3						

Member Number:	52					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.589	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3						

Member Number:	53					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.450	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3						

Member Number:	54					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.505	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number:	55					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.255	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3						

Member Number:	56					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.450	Critical Load Case:	103	Location:	5.00
Critical Condition: Sec. 9.3.1.3						

Member Number:	57					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.452	Critical Load Case:	103	Location:	5.00
Critical Condition: Sec. 9.3.1.3						

Member Number:	58					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.255	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number:	59					
Member Section:	ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.277	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

Member Number:	60					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.260	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

Member Number:	61					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.260	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

Member Number:	62					
Member Section:	FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.451	Critical Load Case:	103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 63					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.302	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 64					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.672	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 65					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.672	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 66					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.224	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 67					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.224	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 68					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.224	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 69					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.463	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

Member Number: 70					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.460	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 71					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.460	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3					

Member Number: 72					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.589	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3					

Member Number: 73					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.448	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 74					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.448	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number:	75					
Member Section:	LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.448	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)						

Member Number:	76					
Member Section:	LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.448	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)						

Member Number:	77					
Member Section:	LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.448	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)						

Member Number:	78					
Member Section:	LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio:	0.448	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 79					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.607	Critical Load Case: 103	Location:	0.00	
Critical Condition: Sec. 9.3.2.2					

Member Number: 80					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.604	Critical Load Case: 103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3					

Member Number: 81					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.604	Critical Load Case: 103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3					

Member Number: 82					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.675	Critical Load Case: 103	Location:	1.20	
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 83					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.101	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 84					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.101	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 85					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.101	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 86					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.672	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD SPACE -- PAGE NO. 38

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 87					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.672	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 88					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.672	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 89					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.694	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

Member Number: 90					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.693	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 91					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.693	Critical Load Case: 103	Location:	0.00		
Critical Condition: Sec. 9.3.1.3					

Member Number: 92					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.704	Critical Load Case: 103	Location:	1.20		
Critical Condition: Sec. 9.3.1.3					

Member Number: 93					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.896	Critical Load Case: 1	Location:	0.00		
Critical Condition: Slenderness (Compression)					

Member Number: 94					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.403	Critical Load Case: 1	Location:	0.00		
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 95					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.403	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 96					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.403	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 97					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.896	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 98					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.403	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 99						
Member Section: ST	ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.746	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.2.2						

Member Number: 100						
Member Section: FR	ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.739	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

Member Number: 101						
Member Section: FR	ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.739	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

Member Number: 102						
Member Section: FR	ISMC400	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.705	Critical Load Case:	103	Location:	0.00	
Critical Condition: Sec. 9.3.1.3						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 103					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 104					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 105					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 106					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 107					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 108					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 109					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.746	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.2.2					

Member Number: 110					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.739	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 111					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.739	Critical Load Case: 103	Location:	1.20		
Critical Condition: Sec. 9.3.1.3					

Member Number: 112					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.678	Critical Load Case: 103	Location:	0.00		
Critical Condition: Sec. 9.3.1.3					

Member Number: 113					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.269	Critical Load Case: 1	Location:	0.00		
Critical Condition: Slenderness (Tension)					

Member Number: 114					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.269	Critical Load Case: 1	Location:	0.00		
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 115					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 116					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.134	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 117					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.134	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 118					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.134	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 119					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.718	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.2.2					

Member Number: 120					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.713	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3					

Member Number: 121					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.713	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3					

Member Number: 122					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.594	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 123					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.896	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 124					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.403	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 125					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.403	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 126					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.403	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 127					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.896	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 128					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.403	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 129					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.634	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.2.2					

Member Number: 130					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.628	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 131					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.628	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3					

Member Number: 132					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.453	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3					

Member Number: 133					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 134					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 135					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 136					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 137					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 138					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 139					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 140					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.488	Critical Load Case:	103	Location:	1.20
Critical Condition: Sec. 9.3.1.3					

Member Number: 141					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.255	Critical Load Case:	103	Location:	0.00
Critical Condition: Sec. 9.3.1.3					

Member Number: 142					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.134	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 143					
Member Section: FR	ISMC400	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.488	Critical Load Case: 103	Location:	1.20		
Critical Condition: Sec. 9.3.1.3					

Member Number: 144					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.134	Critical Load Case: 1	Location:	0.00		
Critical Condition: Slenderness (Tension)					

Member Number: 145					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.597	Critical Load Case: 1	Location:	0.00		
Critical Condition: Slenderness (Compression)					

Member Number: 146					
Member Section: ST	ISMC400	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.497	Critical Load Case: 103	Location:	1.20		
Critical Condition: Sec. 9.3.2.2					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 147					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.597	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 148					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.597	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 149					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 150					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 151					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 152					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 153					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 154					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 155						
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)						

Member Number: 156						
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)						

Member Number: 157						
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)						

Member Number: 158						
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 159					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 160					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 161					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 162					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 163					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 164					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 165					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 166					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 167					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.224	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 168					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.224	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 169					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.224	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 170					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.672	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 171						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.302	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)						

Member Number: 172						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.672	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)						

Member Number: 173						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.448	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)						

Member Number: 174						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.448	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 175						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.448	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)						

Member Number: 176						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.448	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)						

Member Number: 177						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.448	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)						

Member Number: 178						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.448	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 179					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.672	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 180					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.672	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 181					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.672	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 182					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.101	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 183					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.101	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 184					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.101	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 185					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 186					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 187					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.269	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 188					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.299	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 189					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.299	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 190					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.299	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 191						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.134	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)						

Member Number: 192						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.134	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)						

Member Number: 193						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.134	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)						

Member Number: 194						
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)				
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)						

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 195					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 196					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 197					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 198					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 199					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 200					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 201					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 202					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.269	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 203					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.597	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 204					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.597	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 205					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.597	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 206					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.134	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 207					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.299	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 208					
Member Section: LD	ISA100X100X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.134	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 209					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 210					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 211					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 212					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.350	Critical Load Case:	103	Location:	2.05
Critical Condition: Sec. 9.3.1.3					

Member Number: 213					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 214					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 215					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 216					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 217					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 218					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 219					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.345	Critical Load Case:	103	Location:	2.05
Critical Condition: Sec. 9.3.1.3					

Member Number: 220					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 221					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 222					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 223					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 224					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 225					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 226					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 227					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 228					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 229					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 230					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 231					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 232					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 233					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 234					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 235					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 236					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 237					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 238					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 239					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 240					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.345	Critical Load Case:	103	Location:	2.05
Critical Condition: Sec. 9.3.1.3					

Member Number: 241					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.290	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 242					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 243					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.645	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 244					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 245					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 246					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS	Ratio: 0.544	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD SPACE -- PAGE NO. 78

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 247					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.350	Critical Load Case:	103	Location:	2.05	
Critical Condition: Sec. 9.3.1.3					

Member Number: 248					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.290	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 249					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.645	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 250					
Member Section: ST	ISA90X90X8	(INDIAN SECTIONS)			
Status: PASS Ratio: 0.645	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

160. STEEL TAKE OFF ALL

STAAD SPACE -- PAGE NO. 79

STEEL TAKE OFF

STEEL TAKE-OFF

	PROFILE	LENGTH(METE)	WEIGHT(KN)
FR	ISMC400	120.00	117.626
ST	ISMC400	24.00	11.763
LD	ISA100X100X8	270.00	63.883
ST	ISA90X90X8	115.52	12.246
	TOTAL =		205.518

********** END OF DATA FROM INTERNAL STORAGE **********

161. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= AUG 4,2026 TIME= 16:31:11 ****

```
     ************************************************************
     *   For technical assistance on STAAD.Pro, please visit    *
     *   http://www.bentley.com/en/support/                     *
     *                                                          *
     *   Details about additional assistance from               *
     *   Bentley and Partners can be found at program menu      *
     *   Help->Technical Support                                *
     *                                                          *
     *           Copyright (c) Bentley Systems, Inc.            *
     *                http://www.bentley.com                    *
     ************************************************************
```