



Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level



Elevation

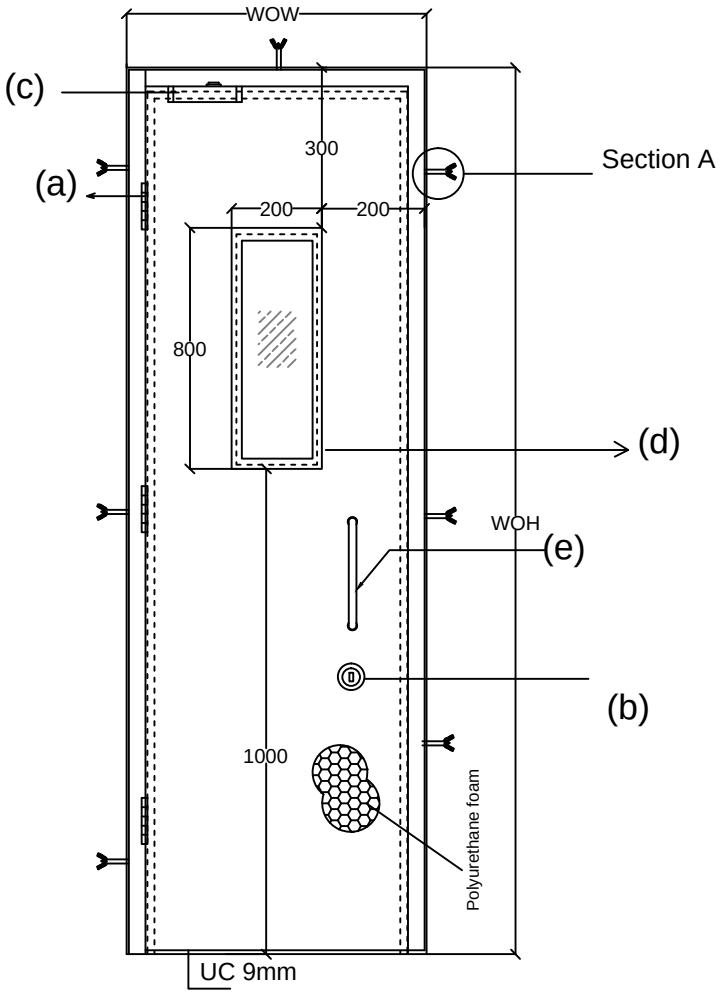

Top View

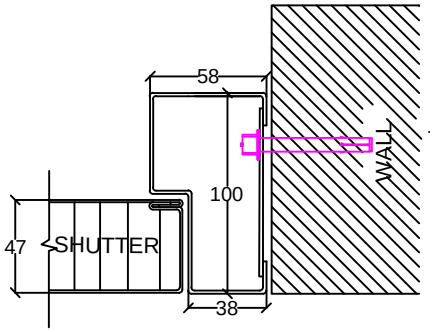

Detail view of Section A

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges 100x75x3mm.(iclean)

(b) LOCK: Mortise dead lock,Cylinder(Both side key) with Escutcheon (iclean)

(c) DOOR CLOSER (iclean)

(d) GLASS : Single glazed 5mm Thick Vision Glass of size 200x800mm

(e) HANDLE : D Handle(254mm) (iclean)

Shutter thickness : 47 mm
Frame Sheet thick : 1.2mm
Shutter sheet thick : 0.8mm
Fixing : On Solid Brick plastered wall with Anchors
Electrostatic powder coated

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

DOOR TYPE	NOMENCLATURE	WOW	WOH	LOCATION	RO=TYPE 3	RI=TYPE 1	LO=TYPE 4	LI=TYPE2	TOTAL
STEEL DOOR	6 SD	600	2100	GROUND FLOOR OFFICE & FACTORY	2	0	0	0	2
		600	2100	FIRST FLOOR OFFICE & FACTORY	0	1	0	0	1

COLOR - RAL 7035

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

SINGLE LEAF STEEL DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	18/03/16	
CHECK	ANIL	18/03/16	
REV.	00		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - TAIIN STEEL FAB & INFRA PVT.LTD.
PROJECT - HYOSUNG T&D
SITE -
DWG. NO. - NIHVA/15-16/211/3
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com