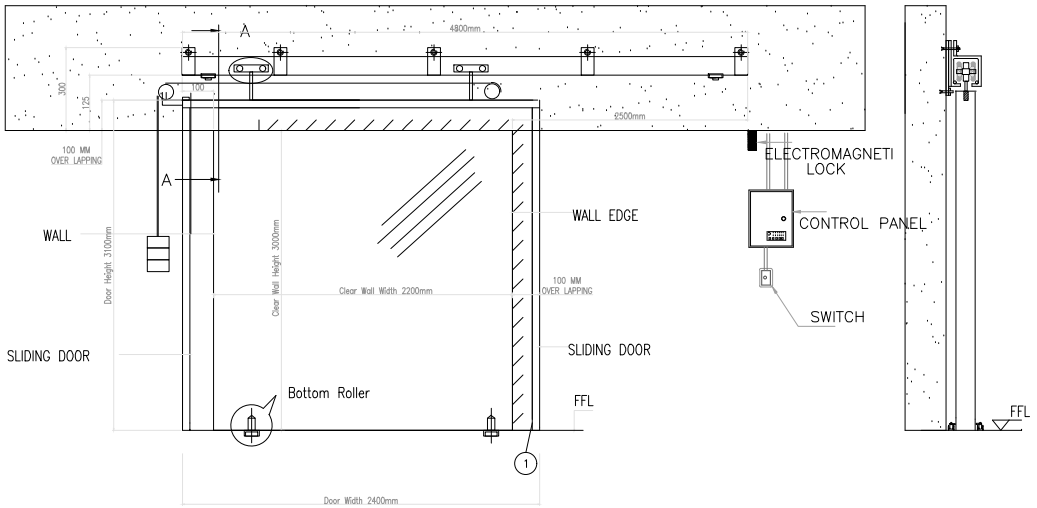

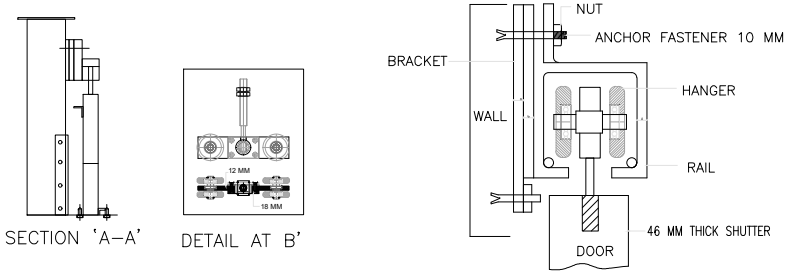



## TECHNICAL SPECIFICATION :

**2 Hr FIRE RATED SLIDING DOOR - AS PER BS STD. (INDIA)**

| SR. | SPECIFICATIONS | DETAILS |
|---|---|---|
| 1 | OPERATING MODE | MANUAL |
| 2 | CERTIFICATION TYPE | 2 HRS FIRE CERTIFICATE (INDIA) + MAGNETIC LATCH AS PER ZONE 1 |
| 3 | FIRE RATING HRS | 2 HOUR FIRE RATED RADIENT SLIDING DOOR |
| 4 | STANDARD AS PER | BS 476 PART-20 & 22 & IS: 3614 PART II |
| 5 | INCLUDED ACCESSORIES | FUSIBLE LINK, WIRE ROPE, GUIDE RAIL, COUNTER WEIGHT WITH COVER , PULLEYS, HANGER ASSEMBLY |
| 6 | ADDITIONAL ACCESSORIES ( AS PER ZONE 1) | 1)ELECTROMAGNETIC LOCK<br>2)CONTROL PANEL-1 NOS<br>3)PUSH TO EXIT SWITCH |
| 7 | RAL COLOUR | RAL 3020 |
| 8 | FIRE MODE CONTROL | A. BY EM<br>B. HEAT-ACTIVATED FUSIBLE WIRE MELTS, USING A COUNTERWEIGHT SYSTEM TO PULL THE DOOR SHUT |
| 9 | RECESSES HANDLE | BOTH SIDES OF THE DOORS |

2 Hr.FIRE RATED SLIDING DOOR WALL OPENING SIZES :-

| SR | WIDTH | HEIGHT | QTY |
|---|---|---|---|
| 1 | 2200 | 3000 | 12 |

2 Hr. FIRE RATED SLIDING DOOR SIZES :-

| SR | WIDTH | HEIGHT | QTY |
|---|---|---|---|
| 1 | 2400 | 3100 | 12 |

NOTE :-
1. All DIMENSIONS ARE IN MM.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

| | | | |
|---|---|---|---|
| TITLE: DOOR AUTOMATION | | | NIHVA TECHNOLOGY PVT. LTD. PUNE<br>Email:- Sales@nihva.com<br>Website:- www.nihva.com |
| | SIGN | DATE | |
| DRAWN | J.P | 13/02/26 | CLIENT - SIEGWERK INDIA PVT. LTD. |
| CHECK | B.S | 13/02/26 | PROJECT - 2 HRS. FIRE RATED SLIDING DOOR |
| APPROVAL | V.T | 13/02/26 | |
| REV | 00 | | SITE - BHIWADI |
| If any queries contact : Design@nihva.com | | | SCALE: - / WT: / SHEET: 01 OF 01 |
| ALL DIMENSION ARE IN mm | | | DWG. NO. : NIHVA/25-26/181 |