



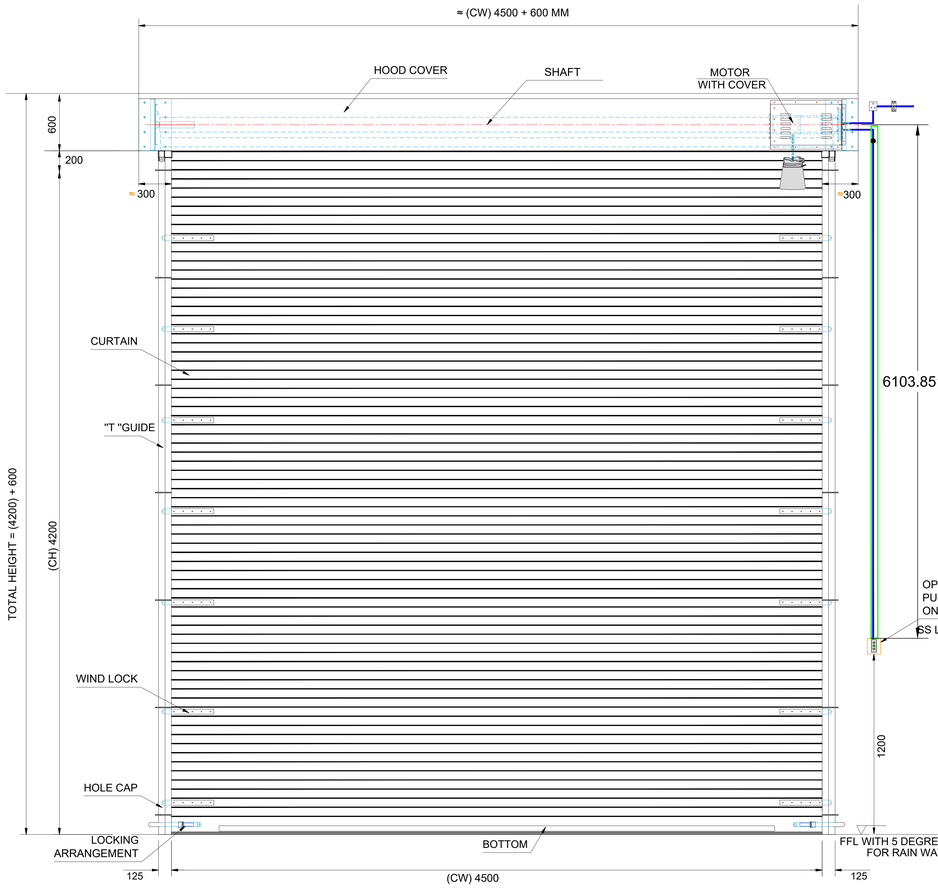

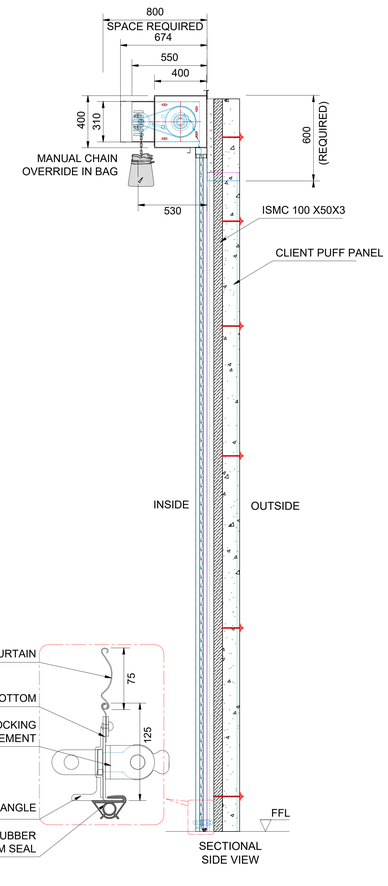

INSIDE ELEVATION

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorised Rolling Shutter (Indirect Drive) with Manual Chain Arrangment
2.	Location Area	Outside
3.	Mounting Surface	Side Brackets: Structure
4.	Slat	Curved 75 mm PPGI Sheet - 1.0 mm Thk. & Windlock Considered (No of Slats 65 Nos)
5.	Bottom Profile	MS Plate 125 x 2.5 mm thick with Angle Stiffner WITH RUBBER SEAL
6.	Guide Profile	M.S." T " Shape profile 125 x 3.15 mm Thk.
7.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
8.	Accessories	Push Button On Both Side

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	4500	4200	01

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :-
MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE
DRAWN	J.S.	19/01/2024
CHECK	A.K.	19/01/2024
APPROVAL	V.T.	19/01/2024

REV-01

SCALE: NTS | WT: | SHEET: 01 OF 01

ALL DIMENSION ARE IN mm

If any queries contact : design@nihva.com