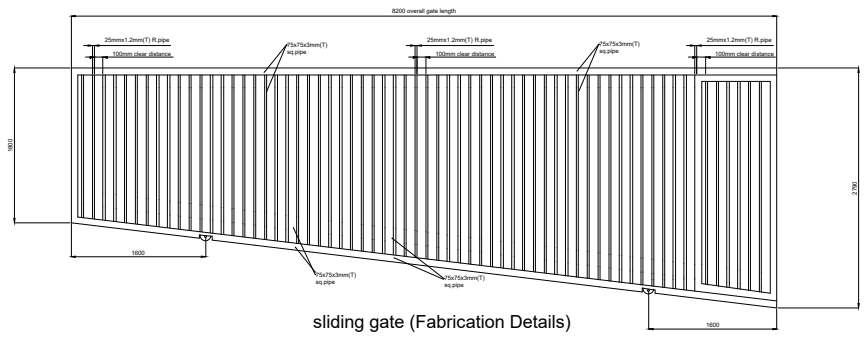
8200 overall gate length
25mmx1.2mm(T) R.pipe
100mm clear distance
75x75x3mm(T) sq.pipe
25mmx1.2mm(T) R.pipe
100mm clear distance
75x75x3mm(T) sq.pipe
25mmx1.2mm(T) R.pipe
100mm clear distance
1800
2700
1600
75x75x3mm(T) sq.pipe
75x75x3mm(T) sq.pipe
1600

sliding gate (Fabrication Details)

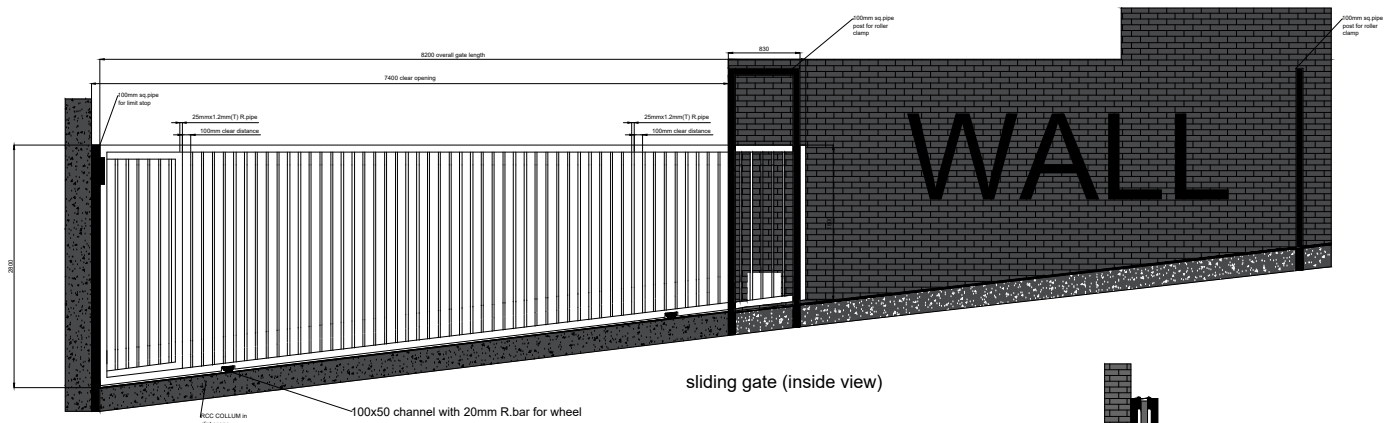
8200 overall gate length
7400 clear opening
830
100mm sq.pipe post for roller clamp
100mm sq.pipe post for roller clamp
100mm sq.pipe for limit stop
25mmx1.2mm(T) R.pipe
100mm clear distance
25mmx1.2mm(T) R.pipe
100mm clear distance
WALL
2800
RCC COLLUM in clint scope
100x50 channel with 20mm R.bar for wheel

sliding gate (inside view)

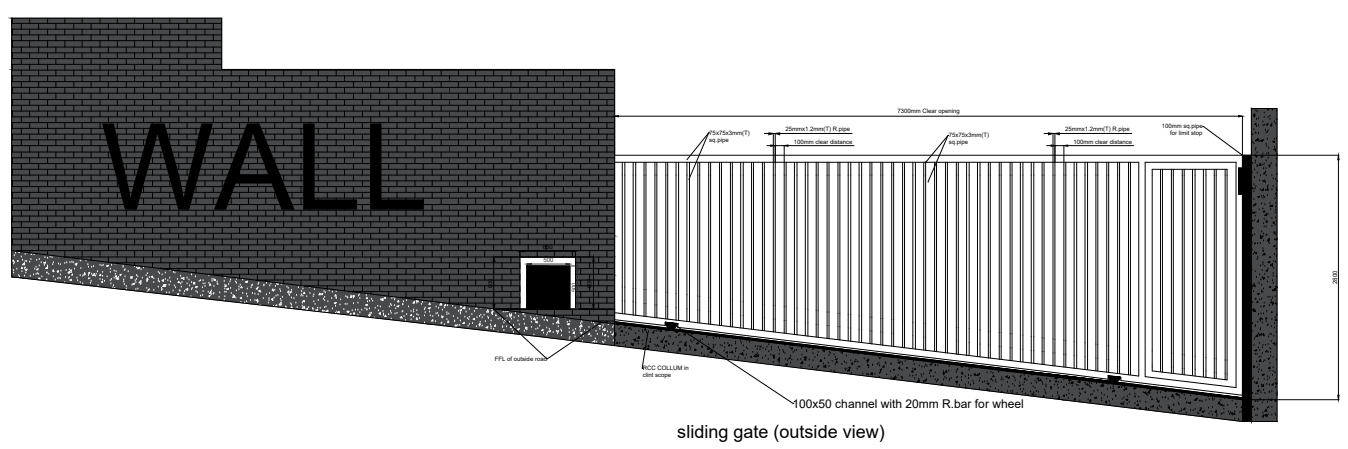
WALL
7300mm Clear opening
75x75x3mm(T) sq.pipe
25mmx1.2mm(T) R.pipe
100mm clear distance
75x75x3mm(T) sq.pipe
25mmx1.2mm(T) R.pipe
100mm clear distance
100mm sq.pipe for limit stop
500
2800
FFL of outside road
RCC COLLUM in clint scope
100x50 channel with 20mm R.bar for wheel

sliding gate (outside view)

NOTE:- SINGLE PHASE POWER SUPPLY TO CONNECT TO THE MOTOR
NOTE:- PUSH BUTTON CONNECTION IN SECURITY CABBIN


sliding gate (outside view)
FAAC
sliding gate (inside view)

sliding gate (Top view)


POST FOR CLAMP
GATE
FLL
300
400
RCC BEAM FOR TRACK

sliding gate (side view)

GATE 2