NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

NIHVA Make Hydraulic Scissor Lift





Sr. No	Description	Specifications
1	**Capacity**	6T point load and 15T UDL
2	**Platform size**	(W) 2000 mm X (L) 2500 mm
3	**Shut ht**	1000 mm
4	**Max ht**	2200 mm
5	**Lift ht**	1200 mm
6	**Power Pack Inside Pit with Buzzer**	NIHVA Make
7	**Safety Railing**	Safety railing M.S SECTION 900 mm ht all side on platform & fixed
8	**Manual Lip**	3 Piece (240 + 1500 + 240) - 1 Side Only
9	**Maintenance Stopper**	2 Nos
10	**Push Button Pendent**	Flexible pendent with 5 mtr Cable - 1 No
11	**Control Panel**	Outside pit - 1 No
12	**Safety Bellow**	All side
13	**Hydraulic Cylinder**	Two numbers with Bore 150 X stroke 500 mm - NIHVA Make
14	**Hot Dip Galvanized**	As per IS Std
15	**Hose**	Parker Make
16	**Cable**	Polycab cables
17	**Hydraulic Oil**	Grade 68 - 125 Ltr
18	**Surface preparation**	Hot dip galvanised (Original)
19	**Fabrication**	3500KG


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

NIHVA Make Hydraulic Dock Leveler

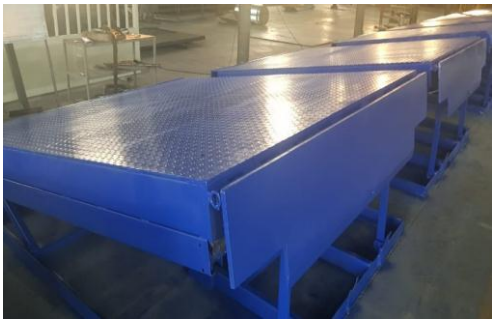



Sr .No.	Specification	Dock Leveller
1	**Capacity**	6 Ton
2	**Dock operation mode**	AC power pack hydraulically operated
3	**Lip operation mode**	Hydraulic
4	**Surface preparation**	Hot dip galvanised (Original)
5	**Operation control**	Through panel
6	**Power Pack**	NIHVA Make
7	**Loading platform height from road**	1200 mm
8	**Travel above & below dock level**	(+) 300 / (-) 250 mm
9	**Platform Size (W x L)**	2000 mm x 3000 mm
10	**Lip size (W x L)**	2000 x 400 mm
11	**Shut Height**	480 mm
12	**Maximum slope can be achieved**	0.1
13	**Clear Pit dimensions (W x L x D)**	(W) 2050 x (L) 3000 mm x (D)485 mm
14	**Hydraulic power pack**	Standard
15	**Driver type**	Direct by electric Motor
16	**Motor Ratings**	1 H.P
17	**Pump design flow**	1.5 LPM
18	**Pump pressure**	120 bar Operating 200 bar Max.
19	**Safety valve set pressure**	120 Kg/cm^2
20	**Pump Type**	Gear
21	**Volume of oil receiver**	5 Lit
22	**Hydraulic Cylinder**	NIHVA Make
23	**No Of Deck cylinder**	2 No
24	**Lip Cylinder**	1 No

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

Motorised Two Leaf Telescopic Sliding Gate



Sr .No.	Specification	Motorised Two Leaf Telescopic Sliding Gate
1	**Door type**	Motorised Two Leaf Telescopic Sliding Gate
2	**Clear Opening gate dimension**	(W) 6000 mm X (H) 1800 mm
3	**Opening Direction**	Horizontal - from left to right or reverse
4	**Mounting Location area**	Inside area
5	**Design Pattern**	Standard Tubular Design Pattern
6	**Outer Frame Tube Sizes**	80 x 80 x 3.2 mm MS SQ. TUBE
7	**Internal Vertical Tube Sizes**	40 x 40 x 2 mm MS SQ. TUBE
8	**Gap Between Tubes**	100 mm C/C
9	**Bottom Rail on ground**	dia 20 mm round bright bar with heavy duty support ISMB 100 X 50 Beams
10	**Bottom Rollers**	Heavy Duty Bottom Wheel With both side Bearings
11	**Guide Rollers supporter during Gate movement**	Nylon Rollers with Bearings both side mounted on column for support smooth movement of gate
12	**Painting**	Two Coats of Primer and Two Coats of Synthetic Enamel Paint
13	**Control Panel**	2 Nos Operating Station.(Motor Panel and Security Room)
14	**Operation**	By Telescopic Mechanism
15	**Accessories**	1. Limit Switch for Cut out when Gate is fully Closed
		2. Flashing Light & 3. Photocell

Wicket Gate

Sr .No.	Specification	Telescopic Sliding Gate
1	**Door type**	Manual Single Leaf Wicket Gate
2	**Size considered**	Clear opening - (W)1500 mm x (H)1800 mm
3	**Mounting Location area**	Inside area
4	**Design Pattern**	Standard Tubular Design Pattern
5	**Outer Frame Tube Sizes**	80 x 80 x 3.2 mm
6	**Internal Vertical Tube Sizes**	40 x 40 x 2 mm
7	**Gap Between Tubes**	100 mm C/C
8	**Painting**	2 Coats of EPOXY polyamide based enamel finish of approved Colour
9	**Operation**	Manually Opening