


DRAWING

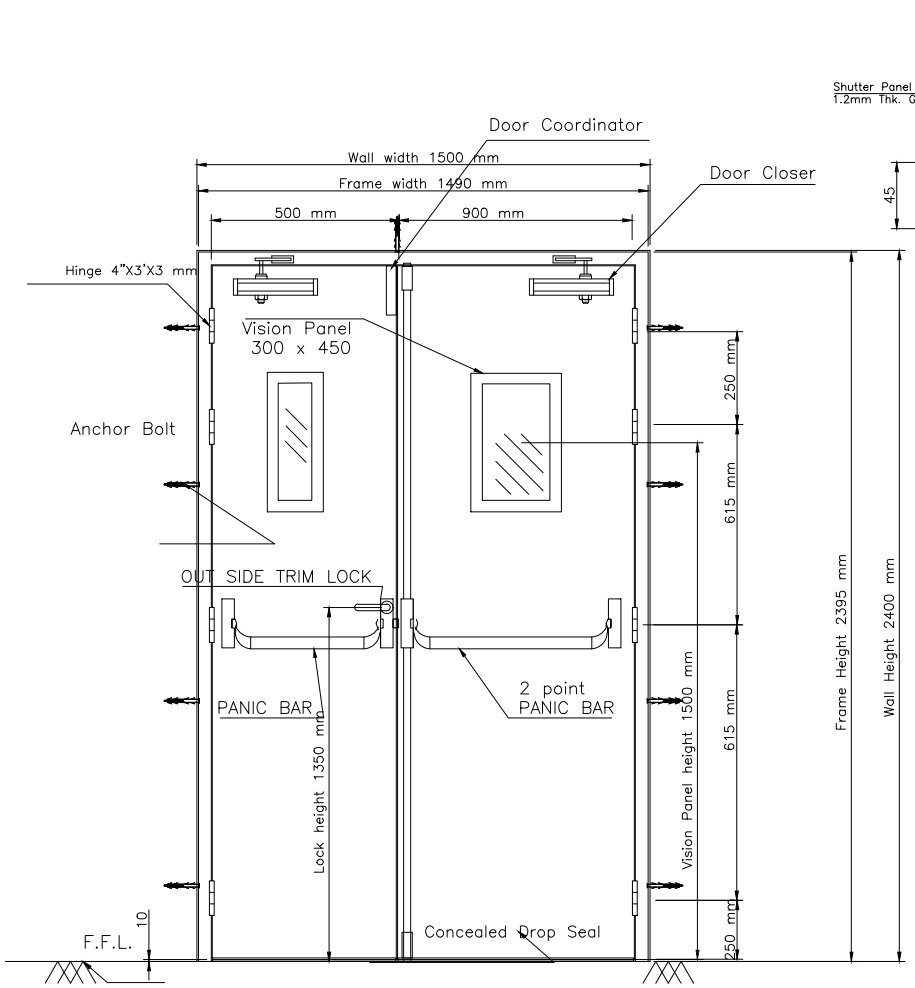

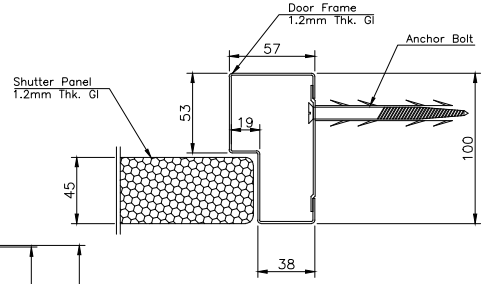

Section S1–S1
Frame Details



HANDING DETAILS

1 LHR	Inside / Outside key	LEFT HAND REVERSE
2 RHR	Inside / Outside key	RIGHT HAND REVERSE

NOTES :-

Frame Joint Type :- Bolted joint

Frame Profile(DxH):- 100 x 57mm.

RAL Shade Code :- RAL

Infill :- Honey Comb

Type :- 2Hr un-insulated door as per IS 3614-2021

Hardware/Accessories Description

1. SS BB Hinges "4x3x3"-Geze
2. Door Closer Std Arm - Geze TS 1000
3. One & Two Point Panic Bar with vertical rod- Geze
4. External trim with half EPC - Geze
5. 2 Hr.Fire Rated Vision Glass 300 x 450mm
6. Concealed Drop Seal
7. Door Stopper

NOTE :

DOUBLE EQUAL LEAF DOOR

LOCATION :

WH01A	WH01B	WH02	WH03	WH04
1 NOS	1 NOS	0 NOS	0 NOS	0 NOS

TITLE - DOOR AUTOMATION

DWG NO - NTPL-308-PM-02

	NAME	SIGNATURE	DATE
DRAWN	J.P.		20-11-2025
CHK'D	B.S.		20-11-2025
APPV'D	V.T.		20-11-2025

IF ANY QUERIES CONTACT - Design@nihva.com

ALL DIMENSIONS ARE IN 'MM' A2

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

PRODUCT - FIRE RATED DOOR

PROJECT NO - NTPL- 308 REVISION - 00

SITE LOCATION - CHENNAI

MATERIAL - QTY - 2

PROJECTION METHOD SCALE :

SHEET 1 OF 1