


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

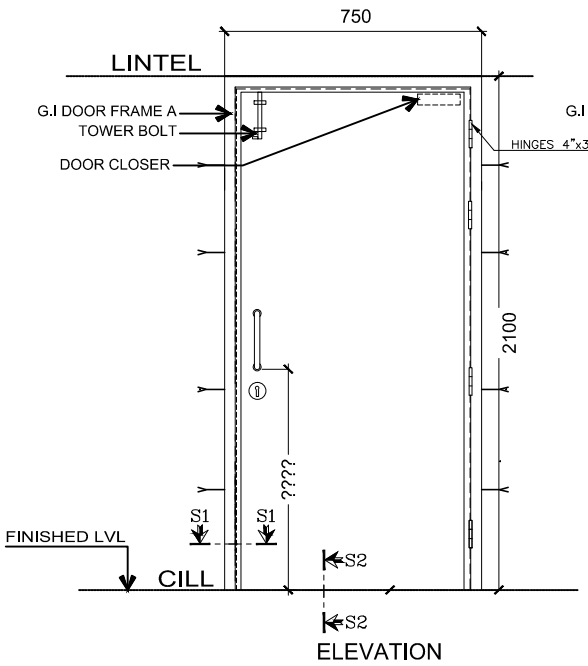


ELEVATION

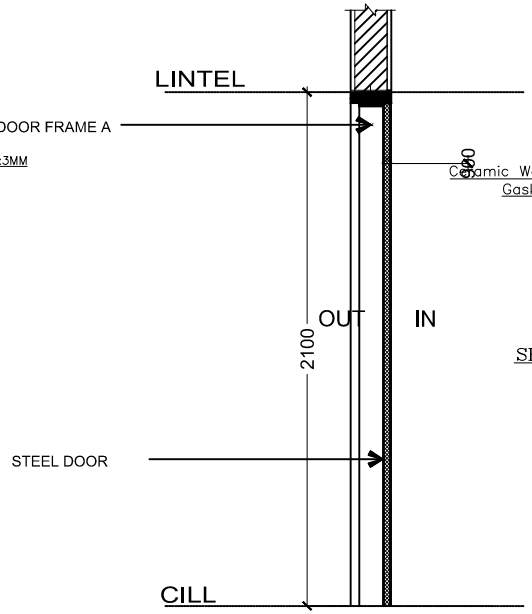


SECTION




SECTION 'S3-S3'

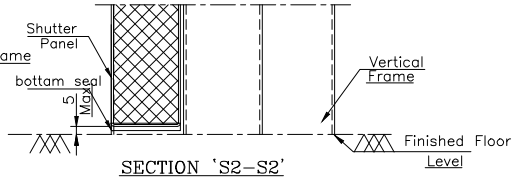

SECTION 'S2-S2'

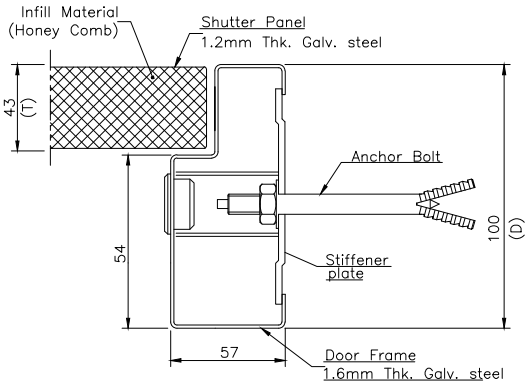

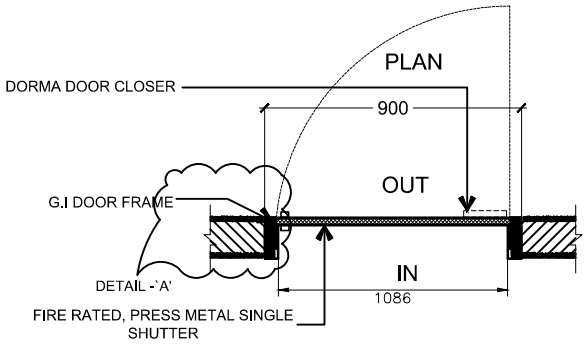

NOTES :-

1) Door Frame shall be fabricated from 1.2mmThk. Glav. steel sheets to form a double rebate profile & fixed to wall with Anchor bolts.
2) Shutter Panels shall be fabricated from 0.8mmThk. Galv.steel having Tray & Cover Construction to provide a nominal thickness of 43mm. Shutter flatness may vary till 5mm.& shutters shall have infill material with reinforcements at top, bottom edges & for hardware fitments.
3) 4nos. of SS Ball Bearing Butt Hinges shall be provided on each Shutter Size 4"x3"X3mm--
4) Dorma PHCR 1000 Panic bar with Outsie trim
5) Dorma Door Closer

Size 1000X2100
STEEL DOOR

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT