NIHVA Overhead sectional door



Vertical head lift

NIHVA Vertical Head Lift Door:

- Suited for spaces with ample vertical headroom, enabling the door to lift directly upwards without necessitating additional clearance.
- Particularly beneficial for settings prioritizing maximum vertical space utilization, such as warehouses and industrial facilities.

NIHVA High Head Lift Door:

- Offers heightened clearance compared to standarc head lift doors, making it ideal for environments with elevated ceiling heights.
- Provides increased flexibility in accommodating larger vehicles or equipment, catering to diverse industrial and commercial needs.



High head lift



Standard head lift

NIHVA Standard Head Lift Door:

- A versatile option suitable for various settings, striking a balance between headroom requirements and door height.
- Commonly deployed in both residential and commercial applications, where moderate headroom is available.

NIHVA Lower Head Lift Door:

- Tailored for spaces with restricted headroom, providing a solution for environments where ceiling clearance is limited.
- Facilitates the installation of sectional doors in areas with lower ceilings, optimizing spatial utilization without compromising functionality.




Lower head lift

A Technologies

+91 2066 3040 33
+91 85 51091 333
sales@nihva.com
www.nihva.com
www.shivaah.com

NIHVA Overhead sectional door

General Drawing

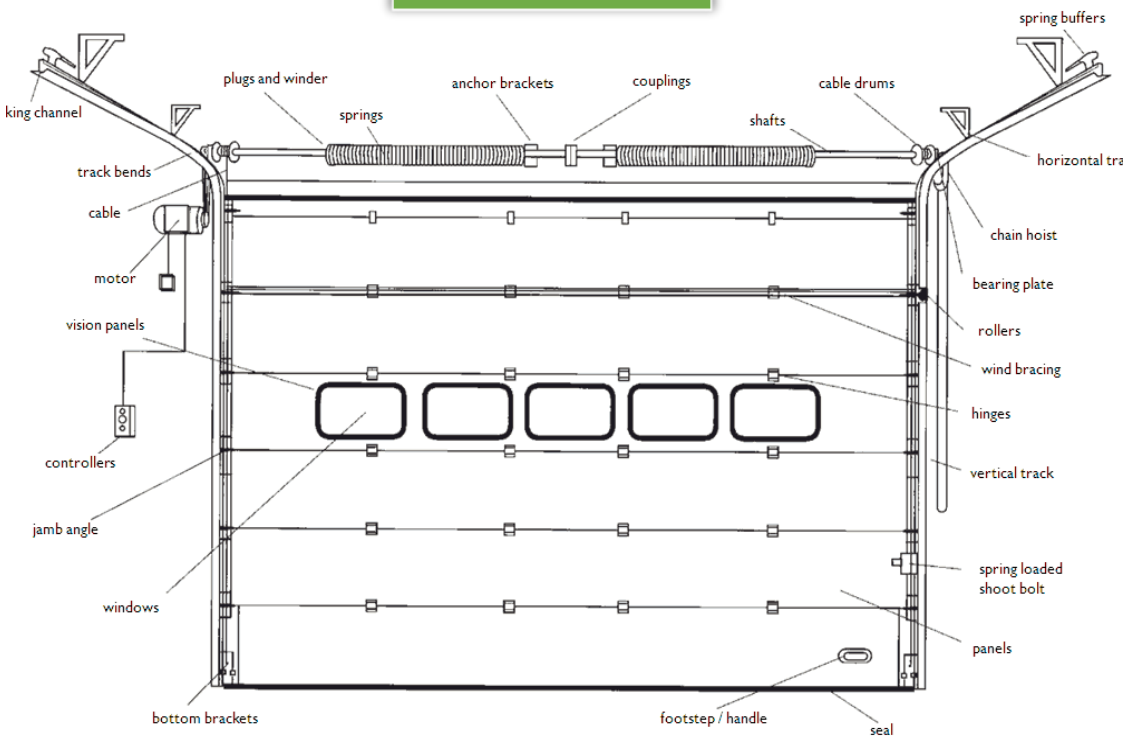

Motor Specification

Input Voltage	AC220V	AC220V	AC380V	AC380V
Rated Power	300W	500W	300W	450W
Start-up Torque	35N.m	60 N.m	60 N.m	100 N.m
No-load running time	15min	15 min	25 min	25 min
Max Door Weight	15m²	25 m²	25 m²	35 m²
Thermal Protective	120˚c	120˚c	120˚c	120˚c
Mode of supportive	Split	Split	Split	Split







+91 2066 3040 33
+91 85 51091 333
sales@nihva.com
www.nihva.com
www.shivaah.com