MANTION
WWW.MANTION.COM

Systems and Motorisation for Gates

MADE IN FRANCE since 1920

Cantilever | Bottom Sliding | Swinging 411A



Copyright ® MANTION

We offer you the widest range of fittings for sliding doors



***MANTION** HAS AN INTERNATIONAL REPUTATION BASED ON:*

Innovation and a permanent adaptation of its range of products to its customers' needs.
A quality product, which meets the requirements of the strictest standards.

*THE **MANTION** KNOW-HOW MEANS BEFORE ALL:*


Its team: people with experience and great skills who do their best to keep bringing you the best service.
Its permanent investment policy combined to the newest technologies.

*WITH **MANTION**, YOU BENEFIT FROM A TOP QUALITY SERVICE:*

Salesmen who listen to your needs and advise you.
A strong technical support: an engineering department and technical advisers at your disposal.
The study and the development of special products upon request.
Very short delivery time.
Very high quality products.

***MANTION**, IT IS ALSO A COMPLETE RANGE OF:*


Fittings for sliding and folding doors.
Fittings for sectional and lateral displacement doors.
Fittings for glass doors.
Fittings in stainless steel quality A2 and A4.

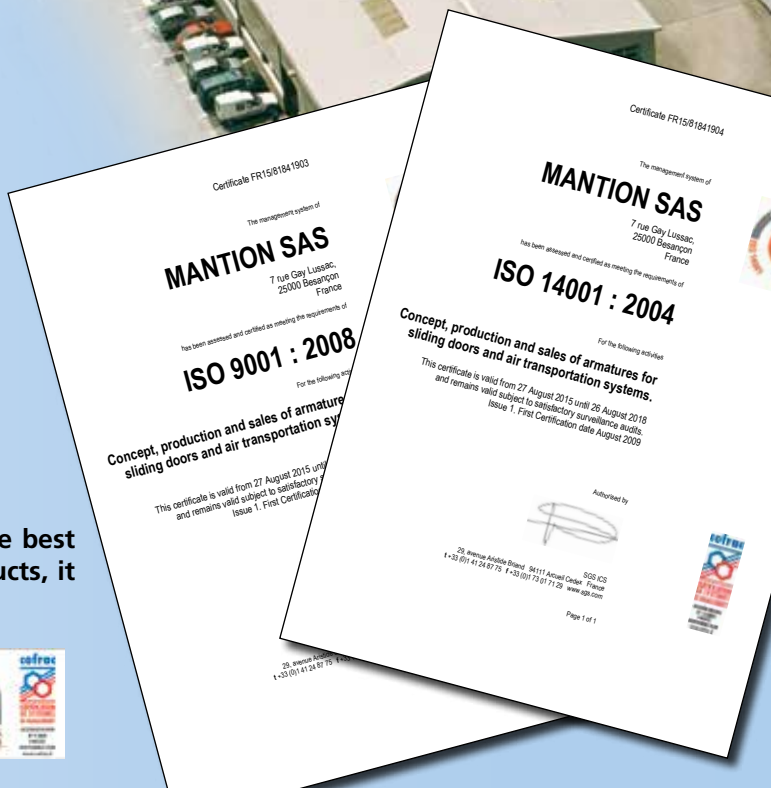

Since *MANTION* has always cared about bringing you the best services within its organization and quality for its products, it is now up to standard:

EN ISO 9001: 2008
EN ISO 14001: 2004



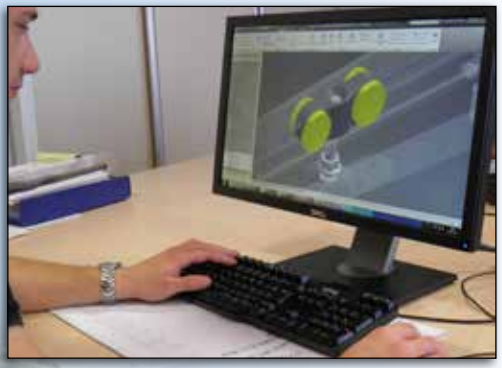





QUALITY TRACKS

MANTION manufactures its tracks at its factory in Besançon according to its own production process. This ensures a long durability and an optimal reliability of its hardware products.

MANTION
WWW.MANTION.COM

7, rue Gay Lussac - ZI de Trépillot - F-25000 BESANÇON - Phone.: +33 3 81 85 38 73/74 - Fax: +33 3 81 53 29 76
Web: http://www.mantion.com - Email: export@mantion.com

CANTILEVER GATES



BOTTOM SLIDING GATES



GATES MOUNTED ON PIVOTS



CANTILEVER GATES 6

Cantilever gates on aluminium track 7

Steel cantilever gates, proposed structures 8

Tracks and wheels for steel cantilever gates 14

Motorization for cantilever gates 16

Gear for steel cantilever gates 18

BOTTOM SLIDING GATES 19

Cast iron wheels 19

Tracks and steel wheels 20

Wheels with internal & external support bracket 21

Kits for bottom sliding gates 22

Stainless steel range, tracks and wheels 23

Locks and handles 24

Motorization for bottom sliding gates 25

Guides, square steel pillars covers and stoppers 26

GATES MOUNTED ON PIVOTS 27

Gates mounted on pivots and hinges 27

Pivots with ball bearing 29

Motorization for swinging gates 30


Invisible door closer 32

Accessories 34

THE MANTION RANGES 35

Disclaimer: Images of products showcased in the catalogues are for representation purpose. The design and specifications are subject to change without any disturbance to the final application. The company reserves full right to discontinue the sales of the products or solutions mentioned in the catalogue and the company is not responsible for any damage or liability occurring owing to this.

CANTILEVER GATES

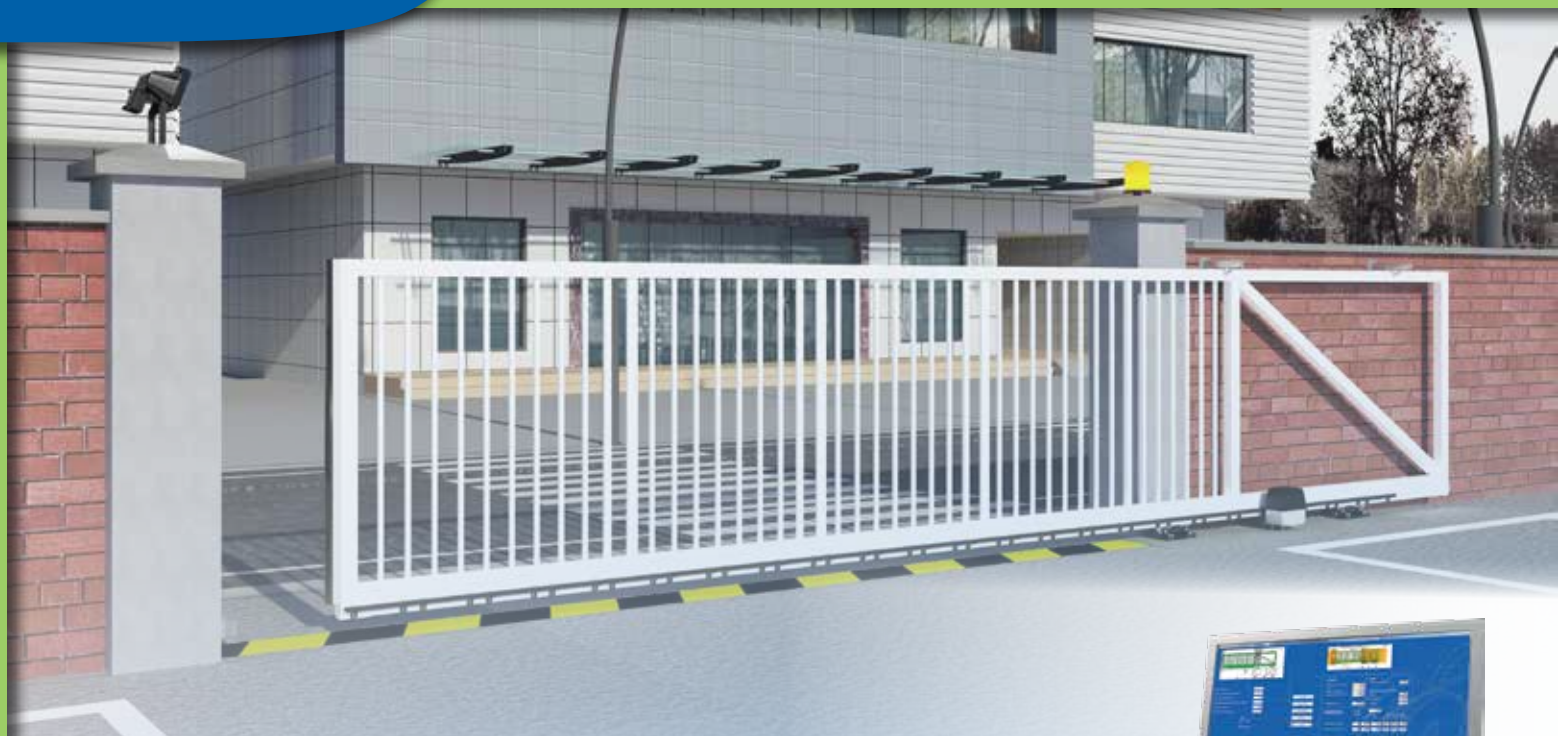



DESCRIPTION:

There is no track on the ground.
The tubular track is either welded or screwed to the gate.
The gate slides on two carriages, which are fixed on a concrete block located on the push back side.
According to the opening position of the gate, the carriages are in contact with either the upper or the lower part of the track to ensure a perfect balance.
The wheels are in constant contact with the top and the bottom of the track limiting the clearance to a minimum (PAF series).
PAF series carriages are strongly recommanded for motorized gates.

AVANTAGES:

- No track on the ground.
- No concrete tie-beam is required to install or support the track.
- The only construction work consists in the concrete block.
- No risk of wear or deformation of the track due to the passage of lorries.
- No risk of ground deformation due to the weather changes.
- No obstruction of the track trough dust, gravel, stone chips ...
- The gate can be installed on a non-stabilized ground (grass, gravel, mould...).
- The ground need not be perfectly horizontal (in the opening).


SAVE TIME !!!

SIZE YOUR GATE TO SUITE YOUR SETUP WITH OUR SLIDESOFT® CALCULATION SOFTWARE ON:

www.mantion.com



technical video

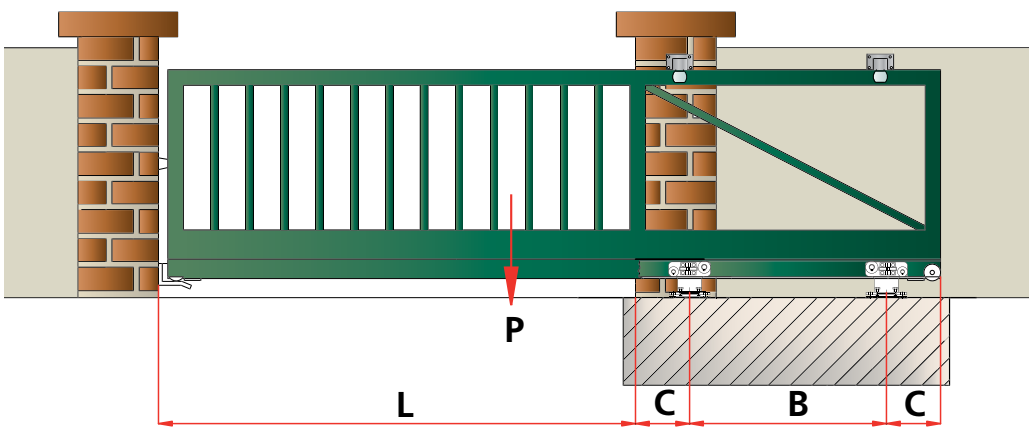

DIMENSIONS OF THE CONCRETE BLOCK:

Length = shaft center distance B + 1 m
(50 cm on each side)

Width = 50 cm

Depth = 80 cm

CARRIAGE SELECTION BASED ON THE TOTAL GATE WEIGHT AND THE OPENING WIDTH


Total weight of the gate	Opening width L						
	3 m	3,50 m	4 m	4,50 m	5 m	5,50 m	6 m
80 kg	9952N	9952N	9952N	9962N	9962N		
130 kg	9962N	9962N	9962N	9962N	9962N	9968N	9968N
160 kg	9958N	9958N	9958N	9958N	9968N	9968N	9968N
250 kg	9968N	9968N	9968N	9968N	9968N	9968N	9968N


POSITIONS OF THE CARRIAGES

Item Nr.	Opening width	Dimension C	Item Nr.	Opening width	Dimension C
9952 N	4 m	0,190 m	9958 N	4,5 m	0,280 m
9962 N	5 m	0,205 m	9968 N	6 m	0,295 m

ALUMINIUM TRACKS

Item Nr.	Material	Length	Weight	L	H	O
10500 PAF6	Aluminium	6 m	29 Kg	65	150	17
10600 PAF6	Aluminium	6 m	39 Kg	80	200	21
10600 PAF9	Aluminium	9 m	58 Kg			



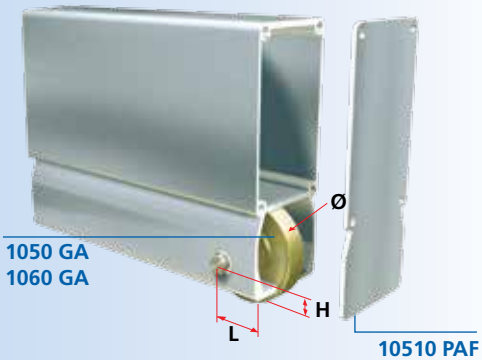


1050 GA
1060 GA

10510 PAF
10610 PAF

ACCESSORIES FOR ALUMINIUM TRACKS

10510 PAF	Aluminium ornemental cap for track 10500 PAF Screwing type.
10610 PAF	Aluminium ornemental cap for track 10600 PAF Screwing type.
1050 GA	End wheel for track 10500 PAF composed of 1 shaft, 2 spacers, 2 circlips and 1 steel wheel.
1060 GA	End wheel for track 10600 PAF composed of 1 shaft, 2 spacers, 2 circlips and 1 steel wheel.
1060 E	Bottom end guide for track 9060 and 10500 PAF.
1070 E	Bottom end guide for track 9070 and 10600 PAF.



1060 E/1070 E

Ø14,5 mm HOLES POSITION FOR ITEMS 1050 GA AND 1060 GA


Item Nr.	L	H	Ø
10500 PAF	33	17	60
10600 PAF	40	20	74

SINGLE CARRIAGE FOR ALUMINIUM TRACKS

9952 N	Carriage with polyamide wheels mounted on high- precision ball bearings. For track: 10500 PAF.
9962 N	Carriage with polyamide wheels mounted on high- precision ball bearings. For track: 10600 PAF.

DOUBLE CARRIAGES FOR ALUMINIUM TRACKS

9958 N	Carriage with polyamide wheels mounted on high- precision ball bearings. For track: 10500 PAF.
9968 N	Carriage with polyamide wheels mounted on high- precision ball bearings. For track: 10600 PAF.



9958 N/9968 N





9952 N/9962 N


DIMENSIONAL CHARASTERISTICS

SINGLE CARRIAGES FOR ALUMINIUM TRACKS

Item Nr.	L	H	l	R	A	B	C
9952 N	120	120	125	74	125	50	89
9962 N	145	140	150	81	150	60	110









DOUBLE CARRIAGES FOR ALUMINIUM TRACKS

Item Nr.	L	H	l	R	A	B	C	D
9958 N	300	140	150	83	150	150	110	60
9968 N	325	145	150	83	150	150	110	60

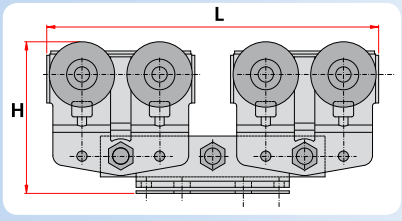






PROPOSED STRUCTURES FOR GATES FROM 3 TO 5.50 M OPENING WIDTH

see carriages dimensions on pages 14 and 15

Opening width L	Total height HT	Gate height H	Total length LT	shaft center distance B	C	Part Nr. Carriage	Weight without track	Lower beam T1	Vertical frame T2	Higher beam T3	Bars T5	Qty	Internal support T4	Qty	Total Weight included track
3	**1,00**	0,9	4.37	0.9	240	**9952PAF**	90	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	116
	1,10	1	4.37	0.9	240	**9952PAF**	95	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	121
	1,20	1,1	4.37	0.9	240	**9952PAF**	99	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	125
	1,30	1,2	4.37	0.9	240	**9952PAF**	104	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	130
	1,40	1,3	4.37	0.9	240	**9952PAF**	109	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	135
	1,50	1,4	4.37	0.9	240	**9952PAF**	113	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	139
3,5	**1,00**	0,9	5.02	1.05	240	**9952PAF**	103	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	133
	1,10	1	5.02	1.05	240	**9952PAF**	108	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	138
	1,20	1,1	5.02	1.05	240	**9952PAF**	113	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	143
	1,30	1,2	5.02	1.05	240	**9952PAF**	119	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	149
	1,40	1,3	5.02	1.05	240	**9952PAF**	124	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	154
	1,50	1,4	5.04	1.07	240	**9952PAF**	129	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	159
4	**1,00**	0,9	5.67	1.20	240	**9952PAF**	116	60x60x3	60x60x3	60x60x3	20x20x2	43	x	x	150
	1,10	1	5.67	1.20	240	**9952PAF**	122	60x60x3	60x60x3	60x60x3	20x20x2	43	x	x	156
	1,20	1,1	5.70	1.23	240	**9952PAF**	128	60x60x3	60x60x3	60x60x3	20x20x2	43	x	x	162
	1,30	1,2	5.78	1.31	240	**9952PAF**	134	60x60x3	60x60x3	60x60x3	20x20x2	44	x	x	168
	1,40	1,3	5.86	1.39	240	**9952PAF**	140	60x60x3	60x60x3	60x60x3	20x20x2	44	x	x	175
	1,50	1,4	5.95	1.48	240	**9952PAF**	146	60x60x3	60x60x3	60x60x3	20x20x2	45	x	x	181
4,5	**1,00**	0,9	6.62	1.65	240	**9952PAF**	144	60x60x3	60x60x3	60x60x3	25x25x2	48	x	x	183
	1,00	0,9	6.47	1.35	310	**9958PAF**	144	60x60x3	60x60x3	60x60x3	25x25x2	48	x	x	182
	1,20	1,08	6.47	1.35	310	**9958PAF**	160	60x60x3	60x60x3	60x60x3	25x25x2	48	x	x	199
	1,40	1,28	6.47	1.35	310	**9958PAF**	172	60x60x3	60x60x3	60x60x3	25x25x2	48	x	x	210
	1,60	1,48	6.52	1.40	310	**9958PAF**	192	60x60x3	60x60x3	60x60x3	25x25x2	48	x	x	226
5	**1,00**	0,88	7.16	1.54	310	**9958PAF**	189	80x80x3	80x80x3	80x80x3	25x25x2	51	40x40x2	4	227
	1,20	1,08	7.40	1.78	310	**9958PAF**	209	80x80x3	80x80x3	80x80x3	25x25x2	54	40x40x2	4	249
	1,40	1,28	7.67	2.05	310	**9958PAF**	229	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	271
	1,40	1,24	7.02	1.50	260	**9962PAF**	205	80x80x3	80x80x3	80x80x3	25x25x2	50	40x40x2	4	271
	1,60	1,48	7.02	2.35	260	**9962PAF**	231	80x80x3	80x80x3	80x80x3	25x25x2	50	40x40x2	4	291
	1,80	1,64	7.02	1.50	260	**9962PAF**	247	80x80x3	80x80x3	80x80x3	25x25x2	50	40x40x2	4	307
	2,00	1,84	7.06	1.55	260	**9962PAF**	271	80x80x3	80x80x3	80x80x3	25x25x2	50	40X40X2	4	331
5,5	**1,20**	1,04	7.67	1.65	260	**9962PAF**	207	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	273
	1,40	1,24	7.67	1.65	260	**9962PAF**	229	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	295
	1,60	1,44	7.67	1.65	260	**9962PAF**	250	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	316
	1,80	1,64	7.73	1.71	260	**9962PAF**	269	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	334
	2,00	1,84	7.96	1.94	260	**9962PAF**	294	80x80x3	80x80x3	80x80x3	25x25x2	56	40x40x2	4	362

Recommendations are for information only for a frequency of 20 cycles per day with this dimensions B. For frequency over 20 cycles contact us.

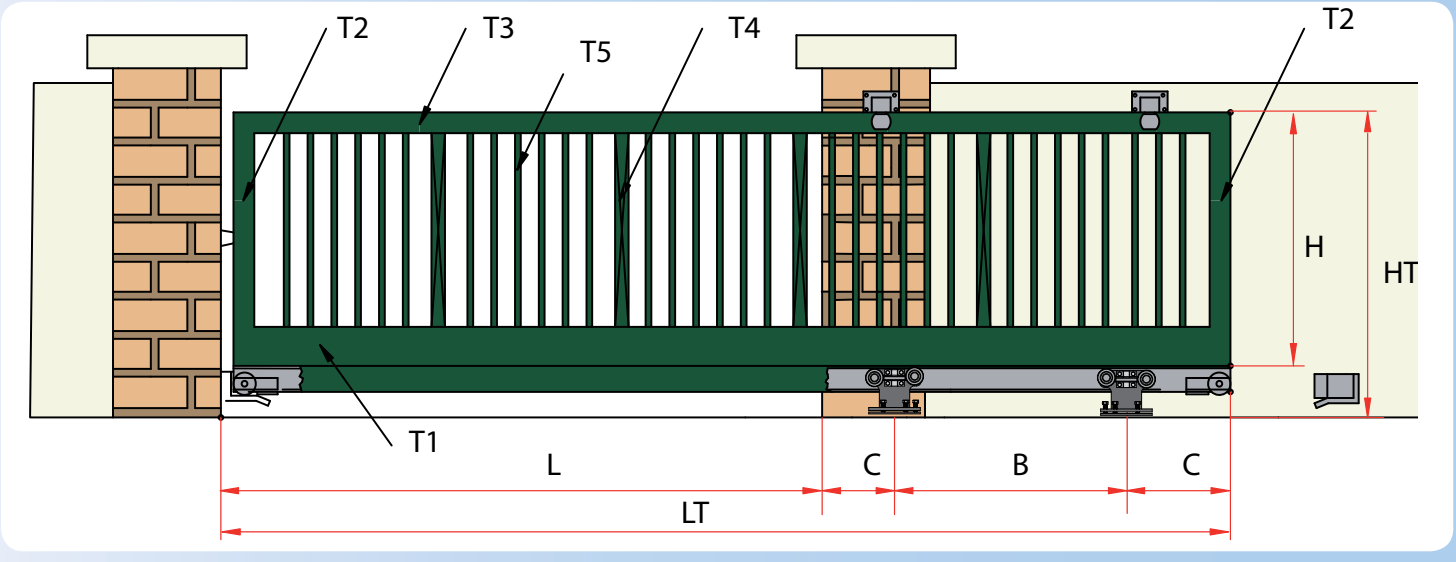




PROPOSED STRUCTURES FOR GATES FROM 6 TO 8.50 M OPENING WIDTH

see carriages dimensions on pages 14 and 15

Opening width L	Total height HT	Gate height H	Total length LT	shaft center distance B	C	Part Nr. Carriage	Weight without track	Lower beam T1	Vertical frame T2	Renfort digital T2	Higher beam T3	Bar T5	Qty	Internal support T4	Qty	Total Weight included track
6	**1,20**	1,04	8.32	1.80	260	9962PAF	227	80x80x3	80x80x3	80x80x3	80x80x3	25x25x2	43	40x40x2	4	298
	1,40	1,24	8.32	1.80	260	9962PAF	250	80x80x3	80x80x3	80x80x3	80x80x3	25x25x2	43	40x40x2	4	321
	1,60	1,44	8.47	1.96	260	9962PAF	274	80x80x3	80x80x3	80x80x3	80x80x3	25x25x2	43	40x40x2	4	346
	1,80	1,64	8.96	2.45	260	9962PAF	319	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	41	40x40x2	4	396
	2,00	1,84	8.50	1.80	350	9968PAF	360	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	41	40x40x2	4	433
6,5	**1,20**	1,04	8.97	1.95	260	9962PAF	243	80x80x3	80x80x3	80x80x3	80x80x3	25x25x2	46	40x40x2	4	320
	1,40	1,24	9.13	2.11	260	9962PAF	269	80x80x3	80x80x3	80x80x3	80x80x3	25x25x2	46	40x40x2	4	347
	1,60	1,44	9.15	1.95	350	9968PAF	320	120x80x3	80x80x3	80x80x3	80x80x3	25x25x2	46	40x40x2	4	399
	1,80	1,64	9.15	1.95	350	9968PAF	348	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	45	40x40x2	4	427
	2,00	1,84	9.15	1.95	350	9968PAF	375	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	45	40x40x2	4	454
7	**1,20**	1,04	10.03	2.51	260	9962PAF	284	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	48	40x40x2	4	370
	1,20	1,04	9.80	2.10	350	9968PAF	274	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	48	40x40x2	4	358
	1,40	1,24	9.80	2.10	350	9968PAF	303	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	48	40x40x2	4	387
	1,60	1,44	9.80	2.10	350	9968PAF	332	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	48	40x40x2	4	416
	1,80	1,64	9.80	2.10	350	9968PAF	372	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	48	40x40x2	4	456
	2,00	1,84	9.80	2.10	350	9968PAF	401	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	48	40x40x2	4	485
7,5	**1,20**	1,04	10.45	2.25	350	9968PAF	294	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	52	40x40x2	5	384
	1,40	1,24	10.45	2.25	350	9968PAF	325	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	52	40x40x2	5	415
	1,60	1,44	10.45	2.25	350	9968PAF	356	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	52	40x40x2	5	446
	1,80	1,64	10.45	2.25	350	9968PAF	399	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	52	40x40x2	5	489
	2,00	1,84	10.45	2.25	350	9968PAF	430	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	52	40x40x2	5	520
8	**1,20**	1,04	11.10	2.40	350	9968PAF	319	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	55	40x40x2	5	414
	1,40	1,24	11.10	2.40	350	9968PAF	351	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	55	40x40x2	5	446
	1,60	1,44	11.10	2.40	350	9968PAF	384	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	55	40x40x2	5	479
	1,80	1,64	11.10	2.40	350	9968PAF	430	140x80x3	80x80x3	80x80x3	120x80x3	30x30x2	55	40x40x2	5	525
	2,00	1,84	11.10	2.40	350	9968PAF	462	140x80x3	80x80x3	80x80x3	120x80x3	30x30x2	55	40x40x2	5	557
8,5	**1,20**	1,04	11.75	2.55	350	9968PAF	339	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	58	40x40x2	6	440
	1,40	1,24	11.75	2.55	350	9968PAF	373	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	58	40x40x2	6	474
	1,60	1,44	11.75	2.55	350	9968PAF	408	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	58	40x40x2	6	509
	1,80	1,64	11.75	2.55	350	9968PAF	457	140x80x3	80x80x3	80x80x3	120x80x3	30x30x2	58	40x40x2	6	558
	2,00	1,84	11.75	2.55	350	9968PAF	492	140x80x3	80x80x3	80x80x3	120x80x3	30x30x2	58	40x40x2	6	593

Recommendations are for information only for a frequency of 20 cycles per day with this dimensions B. For frequency over 20 cycles contact us.

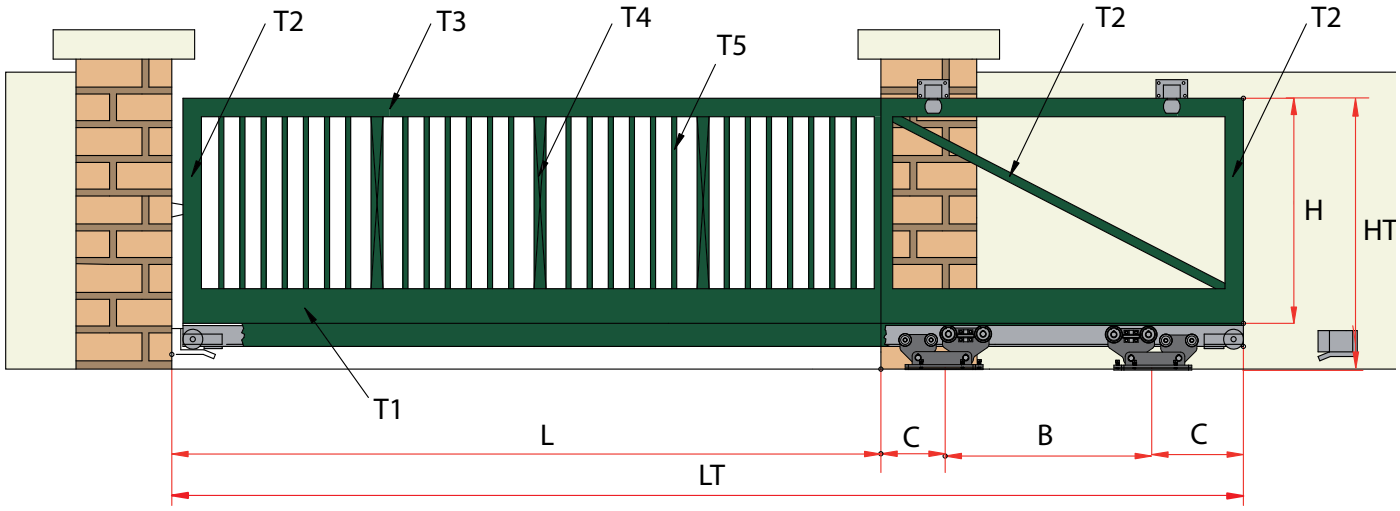




PROPOSED STRUCTURES FOR GATES FROM 9 TO 10.50 M OPENING WIDTH

see carriages dimensions on pages 14 and 15

Opening width L	Total height HT	Gate height H	Total length LT	shaft center distance B	C	Part Nr. Carriage	Weight without track	Lower beam T1	Vertical frame T2	Diagonal support T2	Higher beam T3	Bars T5	Qty	Internal support T4	Qty	Total Weight included track
9	**1,30**	1,14	12.40	2.70	350	9968PAF	492	160x80x4	80x80x3	80x80x3	120x80x3	40x40x2	57	60x60x3	6	598
	1,40	1,24	12.51	2.80	350	9968PAF	618	160x80x4	80x80x3	80x80x3	120x80x3	40x40x2	57	60x60x3	6	623
	1,60	1,44	12.89	3.19	350	9968PAF	585	160x80x4	80x80x3	80x80x3	120x80x3	40x40x2	57	60x60x3	6	686
	1,60	1,39	12.45	2.70	380	9978PAF	561	160x80x4	80x80x3	80x80x3	120x80x3	40x40x2	57	60x60x3	6	748
	1,80	1,59	12.45	2.70	380	9978PAF	616	160x80x4	80x80x3	80x80x3	140x80x3	40x40x2	57	60x60x3	6	803
	2,00	1,79	12.45	2.70	380	9978PAF	664	160x80x4	80x80x3	80x80x3	140x80x3	40x40x2	57	60x60x3	6	851
9,5	**1,30**	1,09	13.10	2.85	380	9978PAF	524	160x80x4	80x80x3	80x80x3	140x80x3	40x40x2	60	60x60x3	7	721
	1,40	1,19	13.10	2.85	380	9978PAF	550	160x80x4	80x80x3	80x80x3	140x80x3	40x40x2	60	60x60x3	7	747
	1,60	1,39	13.10	2.85	380	9978PAF	602	160x80x4	80x80x3	80x80x3	140x80x3	40x40x2	60	60x60x3	7	799
	1,80	1,59	13.10	2.85	380	9978PAF	664	180x80x4	80x80x3	80x80x3	140x80x3	40x40x2	60	60x60x3	7	861
	2,00	1,79	13.10	2.85	380	9978PAF	766	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	60	60x60x3	7	963
10	**1,40**	1,19	13.75	3	380	9978PAF	654	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	62	80x80x3	7	860
	1,50	1,29	13.75	3	380	9978PAF	682	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	62	80x80x3	7	888
	1,60	1,39	13.75	3	380	9978PAF	711	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	62	80x80x3	7	917
	1,80	1,59	13.75	3	380	9978PAF	778	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	62	80x80x3	7	984
	2,00	1,79	13.75	3	380	9978PAF	835	180x80x4	80x80x3	80x80x3	180x80x4	40x40x2	62	80x80x3	7	1041
10,5	**1,4**	1,19	14.40	3.15	380	9978PAF	683	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	66	80x80x3	7	899
	1,5	1,29	14.40	3.15	380	9978PAF	713	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	66	80x80x3	7	929
	1,6	1,39	14.40	3.15	380	9978PAF	742	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	66	80x80x3	7	958
	1,8	1,59	14.40	3.15	380	9978PAF	813	180x80x4	80x80x3	80x80x3	180x80x4	40x40x2	66	80x80x3	7	1029
	2	1,79	14.58	3.33	380	9978PAF	871	180x80x4	80x80x3	80x80x3	180x80x4	40x40x2	66	80x80x3	7	1090

Recommendations are for information only for a frequency of 20 cycles per day with this dimensions B. For frequency over 20 cycles contact us.

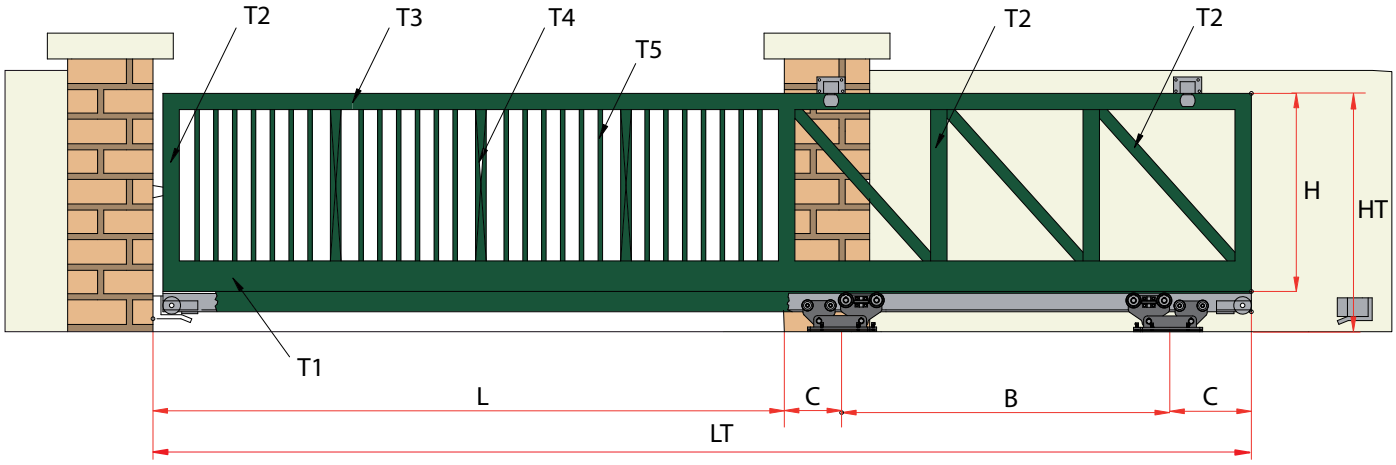

The tables are extracted from our calculation software.
You can access it:

On the Internet:
visit our website on ***www.mantion.com*** to download our software ***"SLIDSOFT®"*** or to simply enter your technicals datas online.

If you do not have internet access:
please contact us to receive our CD version of the calculation software ***"SLIDSOFT®".***

www.mantion.com






PROPOSED STRUCTURES FOR GATES FROM 3 TO 5.50 M OPENING WIDTH

see carriages dimensions on pages 14 and 15

Opening width L	Total height HT	Gate height H	Total length LT	shaft center distance B	C	Part Nr. Carriage	Weight without track	Lower beam T1	Vertical frame T2	Higher beam T3	Bars T5	Qty	Internal support T4	Qty	Total Weight included track
3	**1,00**	0,9	4.46	0.9	280	9952S	77	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	103
	1,10	1	4.46	0.9	280	9952S	81	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	107
	1,20	1,1	4.46	0.9	280	9952S	86	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	112
	1,30	1,2	4.46	0.9	280	9952S	91	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	117
	1,40	1,3	4.46	0.9	280	9952S	95	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	121
	1,50	1,4	4.46	0.9	280	9952S	100	60x60x3	60x60x3	60x60x3	20x20x2	33	x	x	126
3,5	**1,00**	0,9	5.11	1.05	280	9952S	88	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	118
	1,10	1	5.11	1.05	280	9952S	93	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	123
	1,20	1,1	5.11	1.05	280	9952S	98	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	128
	1,30	1,2	5.11	1.05	280	9952S	103	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	133
	1,40	1,3	5.11	1.05	280	9952S	109	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	139
	1,50	1,4	5.11	1.05	280	9952S	114	60x60x3	60x60x3	60x60x3	20x20x2	38	x	x	144
4	**1,00**	0,9	5.76	1.20	280	9952S	99	60x60x3	60x60x3	60x60x3	20x20x2	43	x	x	133
	1,10	1	5.76	1.20	280	9952S	104	60x60x3	60x60x3	60x60x3	20x20x2	43	x	x	138
	1,20	1,1	5.76	1.20	280	9952S	110	60x60x3	60x60x3	60x60x3	20x20x2	43	x	x	144
	1,30	1,2	5.76	1.20	280	9952S	116	60x60x3	60x60x3	60x60x3	20x20x2	43	x	x	150
	1,40	1,3	5.79	1.23	280	9952S	122	60x60x3	60x60x3	60x60x3	20x20x2	43	x	x	156
	1,50	1,4	5.87	1.31	280	9952S	127	60x60x3	60x60x3	60x60x3	20x20x2	44	x	x	162
4,5	**1,00**	0,9	6.48	1.42	280	9952S	122	60x60x3	60x60x3	60x60x3	25x25x2	47	x	x	160
	1,20	1,1	6.73	1.67	280	9952S	137	60x60x3	60x60x3	60x60x3	25x25x2	49	x	x	177
	1,20	1,06	6.47	1.35	310	9958S	141	60x60x3	60x60x3	60x60x3	25x25x2	49	x	x	179
	1,40	1,29	7.02	1.96	280	9952S	156	60x60x3	60x60x3	60x60x3	25x25x2	49	x	x	198
	1,40	1,26	6.47	1.35	310	9958S	150	60x60x3	60x60x3	60x60x3	25x25x2	47	x	x	188
	1,60	1,46	6.47	1.35	310	9958S	166	60x60x3	60x60x3	60x60x3	25x25x2	47	x	x	204
5	**1,00**	0,86	7.12	1.50	310	9958S	162	80x80x3	80x80x3	80x80x3	25x25x2	50	40x40x2	4	204
	1,20	1,06	7.12	1.50	310	9958S	181	80x80x3	80x80x3	80x80x3	25x25x2	50	40x40x2	4	223
	1,40	1,26	7.12	1.50	310	9958S	201	80x80x3	80x80x3	80x80x3	25x25x2	50	40x40x2	4	243
	1,60	1,46	7.12	1.50	310	9958S	221	80x80x3	80x80x3	80x80x3	25x25x2	50	40x40x2	4	263
	1,80	1,66	7.12	1.50	310	9958S	237	80x80x3	80x80x3	80x80x3	25x25x2	50	40x40x2	4	279
	2,00	1,86	7.12	1.50	310	9958S	260	80x80x3	80x80x3	80x80x3	25x25x2	50	40X40X2	4	302
5,5	**1,00**	0.86	7.77	1.65	310	9958S	177	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	222
	1,20	1,06	7.77	1.65	310	9958S	198	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	243
	1,40	1,26	7.77	1.65	310	9958S	219	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	264
	1,60	1,46	7.77	1.65	310	9958S	240	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	285
	1,80	1,66	7.77	1.65	310	9958S	258	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	303
	2,00	1,86	7.92	1.80	310	9958S	282	80x80x3	80x80x3	80x80x3	25x25x2	55	40x40x2	4	329

Recommendations are for information only for a frequency of 20 cycles per day with this dimensions B. For frequency over 20 cycles contact us.

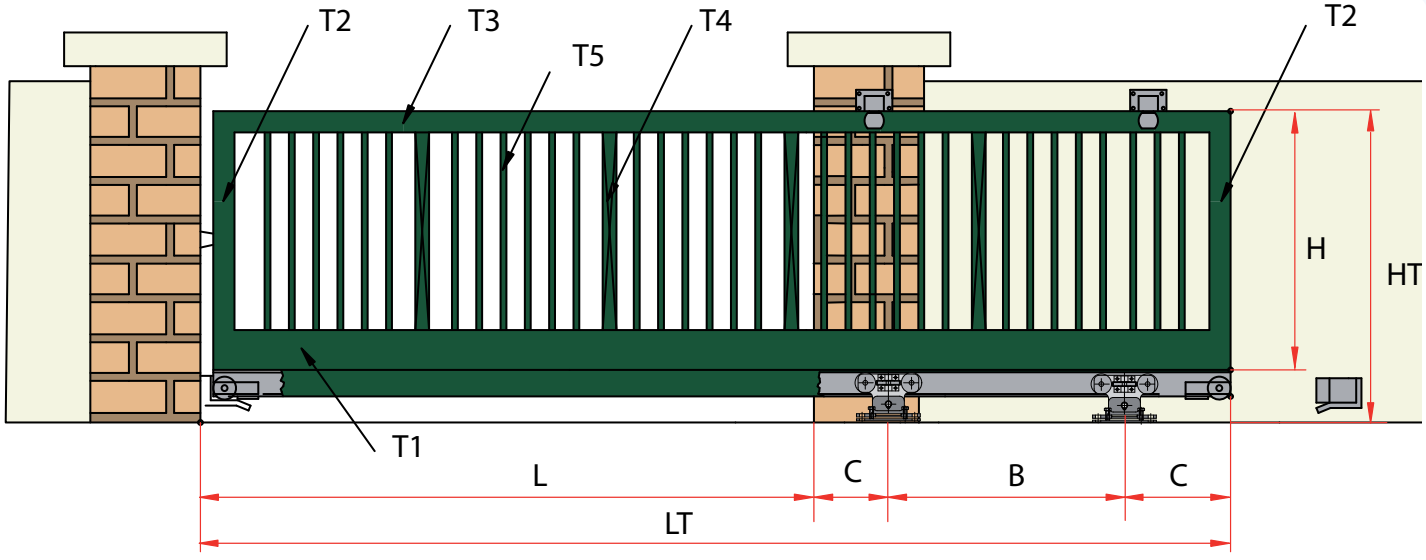


PROPOSED STRUCTURES FOR GATES FROM 6 TO 8.50 M OPENING WIDTH



see carriages dimensions on pages 14 and 15

Opening width L	Total height HT	Gate height H	Total length LT	center distance of shaft B	C	Part Nr. Carriage	Weight without track	Lower beam T1	Vertical frame T2	Renfort digital T2	Higher beam T3	Bar T5	Qty	Internal support T4	Qty	Total Weight included track
6	**1,20**	1,06	8.42	1.80	310	9958S	215	80x80x3	80x80x3	80x80x3	80x80x3	25x25x2	43	40x40x2	4	265
	1,40	1,26	8.42	1.80	310	9958S	238	80x80x3	80x80x3	80x80x3	80x80x3	25x25x2	43	40x40x2	4	288
	1,60	1,46	8.42	1.80	310	9958S	262	80x80x3	80x80x3	80x80x3	80x80x3	25x25x2	43	40x40x2	4	312
	1,80	1,66	8.86	2.24	310	9958S	305	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	41	40x40x2	4	358
	1,80	1,65	8.55	1.80	380	9968S	340	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	41	40x40x2	4	390
6,5	**1,20**	1,06	9.07	1.95	310	9958S	231	80x80x3	80x80x3	80x80x3	80x80x3	25x25x2	46	40x40x2	4	285
	1,40	1,26	9.07	1.95	310	9958S	256	80x80x3	80x80x3	80x80x3	80x80x3	25x25x2	46	40x40x2	4	310
	1,60	1,46	9.58	2.47	310	9958S	306	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	45	40x40x2	4	363
	1,60	1,45	9.20	1.95	380	9968S	318	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	45	40x40x2	4	397
	1,80	1,65	9.20	1.95	380	9968S	348	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	45	40x40x2	4	427
	2,00	1,85	9.20	1.95	380	9968S	375	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	45	40x40x2	4	454
7	**1,20**	1,06	9.86	2.24	310	9958S	276	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	48	40x40x2	4	334
	1,40	1,25	9.85	2.10	380	9968S	302	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	48	40x40x2	4	387
	1,60	1,45	9.85	2.10	380	9968S	331	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	48	40x40x2	4	416
	1,80	1,65	9.85	2.10	380	9968S	372	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	48	40x40x2	4	457
	2,00	1,85	9.85	2.10	380	9968S	400	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	48	40x40x2	4	485
7,5	**1,20**	1,06	10.79	2.67	310	9958S	295	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	52	40x40x2	5	359
	1,20	1,05	10.50	2.25	380	9968S	294	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	52	40x40x2	5	384
	1,40	1,25	10.50	2.25	380	9968S	325	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	52	40x40x2	5	415
	1,60	1,45	10.50	2.25	380	9968S	356	120x80x3	80x80x3	80x80x3	80x80x3	30x30x2	52	40x40x2	5	446
	1,80	1,65	10.50	2.25	380	9968S	400	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	52	40x40x2	5	490
	2,00	1,85	10.66	2.40	380	9968S	430	120x80x3	80x80x3	80x80x3	120x80x3	30x30x2	52	40x40x2	5	522
8	**1,20**	1,05	11.15	2.40	380	9968S	318	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	55	40x40x2	5	414
	1,40	1,25	11.15	2.40	380	9968S	351	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	55	40x40x2	5	447
	1,60	1,45	11.15	2.40	380	9968S	383	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	55	40x40x2	5	479
	1,80	1,65	11.34	2.59	380	9968S	430	140x80x3	80x80x3	80x80x3	120x80x3	30x30x2	55	40x40x2	5	527
	2,00	1,85	11.63	2.87	380	9968S	462	140x80x3	80x80x3	80x80x3	120x80x3	30x30x2	55	40x40x2	5	562
8,5	**1,20**	1,05	11.80	2.55	380	9968S	339	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	58	40x40x2	6	440
	1,40	1,25	11.80	2.55	380	9968S	374	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	58	40x40x2	6	475
	1,60	1,45	11.85	2.60	380	9968S	408	140x80x3	80x80x3	80x80x3	80x80x3	30x30x2	58	40x40x2	6	510
	1,80	1,65	12.30	3.05	380	9968S	451	140x80x3	80x80x3	80x80x3	120x80x3	30x30x2	58	40x40x2	6	563
	2,00	1,85	12.65	3.40	380	9968S	492	140x80x3	80x80x3	80x80x3	120x80x3	30x30x2	58	40x40x2	6	601
	2,00	1,79	11.93	2.55	440	9978S	514	140x80x3	80x80x3	80x80x3	120x80x3	30x30x2	58	40x40x2	6	693

Recommendations are for information only for a frequency of 20 cycles per day with this dimensions B. For frequency over 20 cycles contact us.

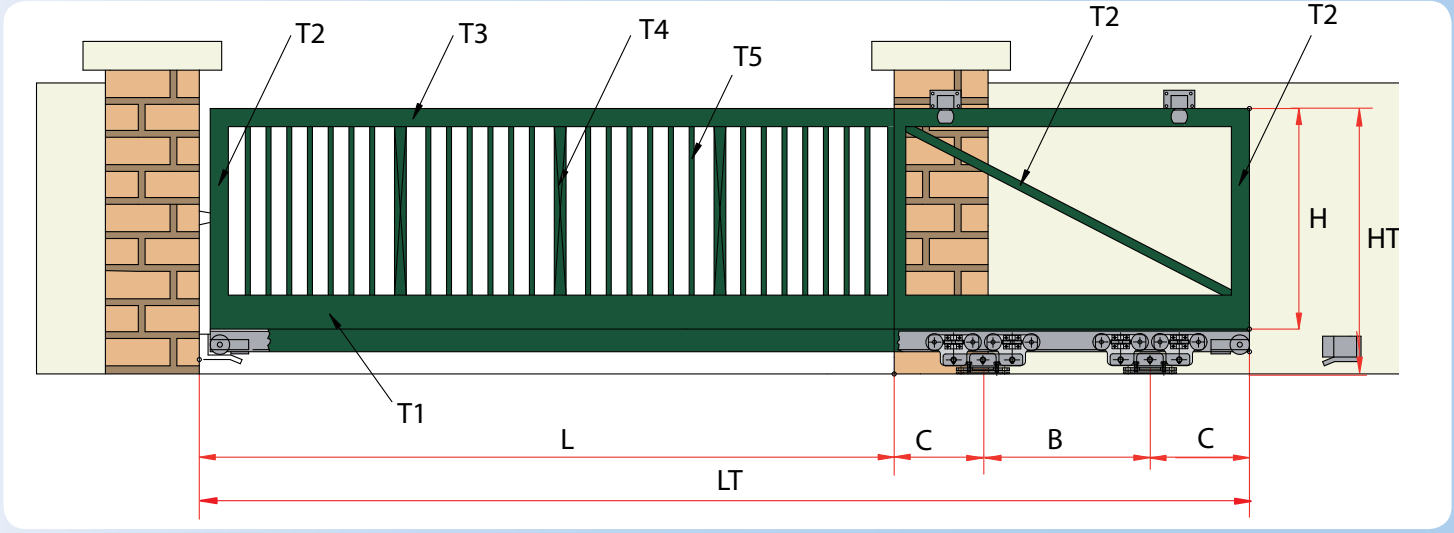




PROPOSED STRUCTURES FOR GATES FROM 9 TO 10.50 M OPENING WIDTH

see carriages dimensions on pages 14 and 15

Opening width L	Total height HT	Gate height H	Total length LT	center distance of shaft B	C	Part Nr. Carriage	Weight	Lower beam T1	Vertical frame T2	Diagonal support T2	Higher beam T3	Bars T5	Qty	Internal support T4	Qty	Total Weight included track
9	**1,30**	1,15	13,40	3,63	380	9968S	498	160x80x4	80x80x3	80x80x3	120x80x3	40x40x2	57	60x60x3	6	610
	1,30	1,35	12,58	2,70	440	9978S	479	160x80x4	80x80x3	80x80x3	120x80x3	40x40x2	57	60x60x3	6	705
	1,40	1,25	12,58	2,70	440	9978S	504	160x80x4	80x80x3	80x80x3	120x80x3	40x40x2	57	60x60x3	6	730
	1,60	1,39	12,58	2,70	440	9978S	549	160x80x4	80x80x3	80x80x3	120x80x3	40x40x2	57	60x60x3	6	750
	1,80	1,59	12,58	2,70	440	9978S	604	160x80x4	80x80x3	80x80x3	140x80x3	40x40x2	57	60x60x3	6	805
	2,00	1,79	12,58	2,70	440	9978S	654	160x80x4	80x80x3	80x80x3	140x80x3	40x40x2	57	60x60x3	6	855
9,5	**1,30**	1,09	13,23	2,85	440	9978S	519	160x80x4	80x80x3	80x80x3	140x80x3	40x40x2	60	60x60x3	7	723
	1,40	1,19	13,23	2,85	440	9978S	539	160x80x4	80x80x3	80x80x3	140x80x3	40x40x2	60	60x60x3	7	749
	1,60	1,39	13,23	2,85	440	9978S	589	160x80x4	80x80x3	80x80x3	140x80x3	40x40x2	60	60x60x3	7	801
	1,80	1,59	13,23	2,85	440	9978S	654	180x80x4	80x80x3	80x80x3	140x80x3	40x40x2	60	60x60x3	7	863
	2,00	1,79	13,23	2,85	440	9978S	754	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	60	60x60x3	7	965
10	**1,40**	1,19	13,88	3,00	440	9978S	643	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	62	80x80x3	7	862
	1,50	1,29	13,88	3,00	440	9978S	668	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	62	80x80x3	7	890
	1,60	1,39	13,88	3,00	440	9978S	698	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	62	80x80x3	7	919
	1,80	1,59	13,88	3,00	440	9978S	768	180x80x4	80x80x3	80x80x3	180x80x4	40x40x2	62	80x80x3	7	986
	2,00	1,79	14,06	3,18	440	9978S	828	180x80x4	80x80x3	80x80x3	180x80x4	40x40x2	62	80x80x3	7	1046
10,5	**1,40**	1,19	14,53	3,15	440	9978S	668	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	66	80x80x3	7	901
	1,50	1,29	14,53	3,15	440	9978S	698	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	66	80x80x3	7	931
	1,60	1,39	14,53	3,15	440	9978S	728	180x80x4	80x80x3	80x80x3	160x80x4	40x40x2	66	80x80x3	7	960
	1,80	1,59	14,53	3,25	440	9978S	818	180x80x4	80x80x3	80x80x3	180x80x4	40x40x2	66	80x80x3	7	1032
	2,00	1,79	14,96	3,5	440	9978S	863	180x80x4	80x80x3	80x80x3	180x80x4	40x40x2	66	80x80x3	7	1097

Recommendations are for information only for a frequency of 20 cycles per day with this dimensions B. For frequency over 20 cycles contact us.

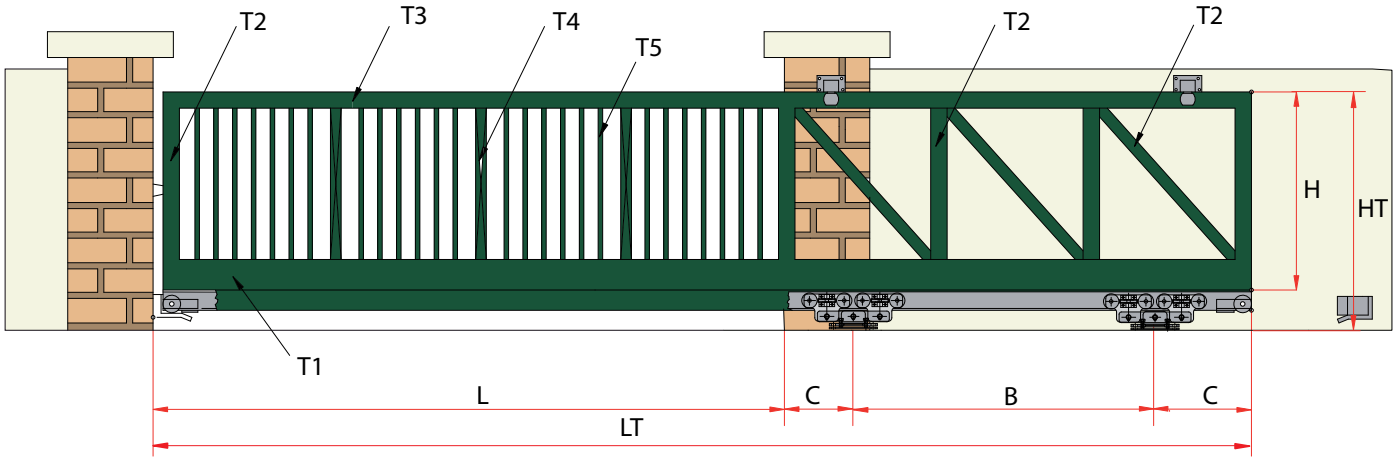

The tables are extracted from our calculation software.
You can access it:

On the Internet:
visit our website on ***www.mantion.com*** to download our software ***"SLIDSOFT®"*** or to simply enter your technicals datas online.

If you do not have internet access:
please contact us to receive our CD version of the calculation software ***"SLIDSOFT®".***


www.mantion.com



STEEL TRACK



HEL STEEL TRACKS (HIGH ELASTIC LIMIT)							
Item Nr.	Material	Length	Weight	L	H	O	e
9050/600*	Galvanized steel**	6 m	35,5 Kg	65	60	18	3,5
9050N/600*	Plain Steel						
9060/600*	Galvanized steel**	6 m	51,5 Kg	80	75	22	4,5
9060N/600*	Plain Steel						
9060/900*	Galvanized steel**	9 m	77 Kg				
9060N/900*	Plain Steel						
9070/600*	Galvanized steel**	6 m	90 Kg	90	110	25	6
9070N/600*	Plain Steel						
9070/900*	Galvanized steel**	9 m	135 Kg				
9070N/900*	Plain Steel						



* *Special lengths upon requests.*
** *Our tracks uses the ZMg200 corrosion protection process.*


ALL CARRIAGES ARE EQUIPPED WITH WATERPROOF BEARINGS

PAF series Carriages

HIGH PERFORMANCE SINGLE CARRIAGE	
9952 PAF	Carriage equipped with reinforced ball bearings. For track: 9050.
9962 PAF	Carriage equipped with reinforced ball bearings. For track: 9060.
9972 PAF	Carriage equipped with reinforced ball bearings. For track: 9070.

HIGH PERFORMANCE DOUBLE CARRIAGE	
9958 PAF	Carriage equipped with reinforced ball bearings. For track: 9050.
9968 PAF	Carriage equipped with reinforced ball bearings. For track: 9060.
9978 PAF	Carriage equipped with reinforced ball bearings. For track: 9070.





9952 PAF / 9962 PAF
9972 PAF





9958 PAF / 9968 PAF
9978 PAF


DIMENSIONAL CHARACTERISTICS


HIGH PERFORMANCE SINGLE CARRIAGE								
Item Nr.	L	H	I	R	A	B	C	D
9952 PAF	151	98	100	42	100	135	60	92
9962 PAF	191	153	130	81	130	185	90	135
9972 PAF	230	205	170	99	170	230	130	170

HIGH PERFORMANCE DOUBLE CARRIAGE								
Item Nr.	L	H	I	R	A	B	C	D
9958 PAF	297	117	130	61	130	235	90	100
9968 PAF	379	153	150	81	150	310	110	165
9978 PAF	429	206	200	99	200	360	160	260






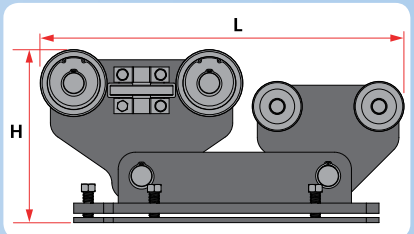




S series CARRIAGES

SINGLE CARRIAGES WITH CENTRAL WHEEL OF ALIGNEMENT	
9952 S	Carriage with steel wheels mounted on high-precision ball bearings. For track: 9050.
9962 S	Carriage with steel wheels mounted on high-precision ball bearings. For track: 9060.
9972 S	Carriage with steel wheels mounted on high-precision ball bearings. For track: 9070.




9962 S
9972 S



9952 S

DOUBLE CARRIAGES WITH CENTRAL WHEEL OF ALIGNEMENT	
9958 S	Carriage with steel wheels mounted on high-precision ball bearings. For track: 9050.
9968 S	Carriage with steel wheels mounted on high-precision ball bearings. For track: 9060.
9978 S	Carriage with steel wheels mounted on high-precision ball bearings. For track: 9070.



9958 S





9968 S
9978 S


DIMENSIONAL CHARACTERISTICS


SINGLE CARRIAGES WITH CENTRAL WHEEL OF ALIGNEMENT								
Item Nr.	L	H	I	R	A	B	C	D
9952 S	241	90	106	45	106	50	70	-
9962 S	209	141	130	83	130	170	90	135
9972 S	275	196	170	103	170	210	130	170


DOUBLE CARRIAGES WITH CENTRAL WHEEL OF ALIGNEMENT								
Item Nr.	L	H	I	R	A	B	C	D
9958 S	300	140	150	83	150	150	110	60
9968 S	430	145	150	83	150	200	110	165
9978 S	560	196	200	103	200	300	160	260










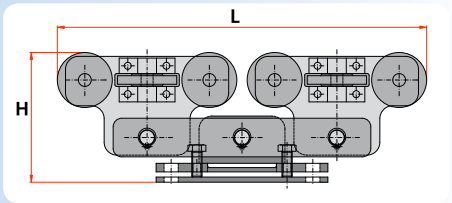


ACCESSORIES

Item Nr.	Designation
1050 E	Bottom end guide for track 9050 - L = 120 mm.
1060 E	Bottom end guide for track 9060 - L = 120 mm.
1070 E	Bottom end guide for track 9070 - L = 120 mm.
1051 G	End wheel for track 9050 - L = 149 mm.
1061 G	End wheel for track 9060 - L = 151.5 mm.
1071 G	End wheel for track 9070 - L = 150.5 mm.



1051 G/1061 G/1071 G



1050 E /1060 E/1070 E

ideal for residential environments (moderate usage)

24V MOTORIZATION KIT FOR SLIDING GATE (with receiver + 1 four-channel remote control + orange light)	
Item Nr.	**Designation**
C0003350	**C300** motor, maximum force 650 N for sliding gates weighing up to **300 kg** and 6 m wide. (without rack)
C0003360	**C500** motor, maximum force 1000 N for sliding gates weighing up to **500 kg** and 8 m wide. (without rack)
C0003370	**C800** motor, maximum force 1200 N for sliding gates weighing up to **800 kg** and 10 m wide. (without rack)
C0003380	M4K nylon rack with steel core. Length = 1 m.

C300 - C500 - C800





orange light



remote control

The C Line is characterized by its compact and robust box comprising a galvanized aluminium block and a plastic cover. Its reliable electronics guarantees you completely safe operation.
The **C300**, **C500** and **C800** PLCs are **EN 13241-1**-certified without the use of feeler strips.
Optimal levels of safety thanks to obstacle detection.

ideal for professional environments (intensive usage)

230 V MOTORIZATION KIT FOR SLIDING GATE (with receiver + 1 four-channel remote control + orange light)	
Item Nr.	**Designation**
C0003400	**CX1000** motor, maximum force 1000 N for sliding gates weighing up to **1000 kg** (without rack).
C0003410	**CX1500** motor, maximum force 1500 N for sliding gates weighing up to **1500 kg** (without rack).
C0003420	**CX2000** motor, maximum force 2000 N for sliding gates weighing up to **2000 kg** (without rack).
2222 CR	Rack for motorized gates Length = 1 m. Module 4 - 22mm x 22mm in galvanized steel.

SAFETY EDGE	
C0003850	8.2KOhm Safety edge. L = 1500 mm.
C0003860	8.2KOhm Safety edge. L = 2000 mm
C0003890	DUS1 Radio transmitter, 868 MHz, for 1 safety edge.
C0003900	DUS2 Radio transmitter, 868 MHz, for 2 safety edges.
C0003920	Safety edge cutting kit.

400 V MOTORIZATION KIT FOR SLIDING GATE (with receiver + 1 four-channel remote control + orange light)	
Item Nr.	**Designation**
C0003450	**CX2000/400 V** SET motor, maximum force 2000 N, for sliding gates weighing up to **2000 kg** (without rack).
C0003455	Rack for motorized gates. Length = 2 m. Module 6 - in galvanized steel.

ACCESSORIES CONTROL	
Item Nr.	**Designation**
C0003700	BHS110 1-channel remote control.
C0003710	BHS130 3-channel remote control.
C0003720	BHS140 4-channel remote control.
C0003750	BHS221 Blue car2 remote control, 2-channel.
C0003760	EWLS AP4 photoelectric cell.

RACK and PINS	
C0003380	M4K nylon rack with steel core. Length = 1 m.
2222 CR	Rack for motorized gates. Length = 1 m. Module 4 - 22mm x 22 mm in galvanized steel.
3012 CR	Rack for motorized gates. Length = 1 m. Module 4 - Drilled for a M8 screw - 30 mm x 12 mm in black vernish steel. 3 pins/rack.
1708 PL	Pins in galvanized steel for rack fixing. Screw M8. Height = 27 mm.
1708 PLC	Pins in galvanized steel for rack fixing. Screw M8. Height = 16 mm.

C300 - C500 - C800

orange light

remote control

CX1000 - CX1500
CX2000 - CX2000/400V





orange light



remote control

Soft starting and stopping (Soft-Start / Soft-Stop).



C0003890



C0003900



C0003710



C0003700




C0003850



C0003720



C0003750

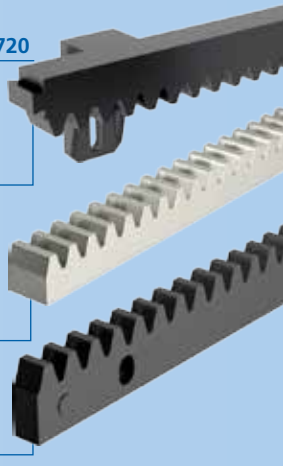

C0003380

2222 CR

3012 CR



C0003760



1708 PL
1708 PLC


C Line features:

- Compact, robust and carefully designed box.
- Controlled by microprocessor. Self-programming of obstacle detection and limit stop positions.
- Connection available for control accessories (push-button, fingerprint scanner, door code, etc.).
- Partial opening function.
- Protection connections available (feeler strips, photoelectric cells and emergency stop sensors).
- Optional relay for connecting a warning light.
- Force limiter in both directions.
- LED status indicator (on or error).
- Obstacle detection in both directions: the motor stops if it meets any resistance and frees the obstacle immediately.
- Radio system on frequency 868 MHz.
- Automatic closing function (this requires photoelectric cells to be installed).
- Maintenance-free motorization.
- Adjustable height for easy mounting.
- Built-in manual emergency release.

C Line 24V

Operator type	C300	C500	C800
Maximum gate weight	300 kg	500 kg	800 kg
Maximum gate length	6 m	8 m	10 m
Maximum gate area	9 m²	12 m²	15m²
Maximum tractive force	650 N	1000 N	1200 N
Maximum travel speed	160 mm / Sec	160 mm / Sec	160 mm / Sec
Power supply	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Motor voltage	24 VDC	24 VDC	24 VDC
Temperature range	-20... +60 C°	-20... +60 C°	-20... +60 C°


C300 - C500 - C800

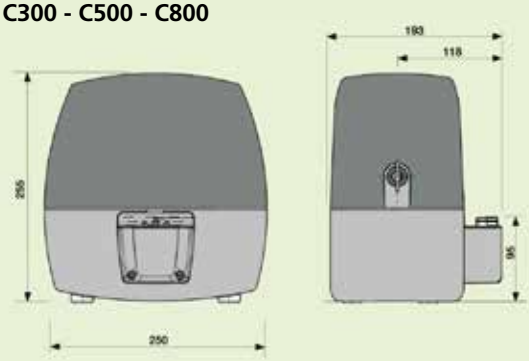

C Line 230V

Operator type	CX1000	CX1500	CX2000
Maximum gate weight	1000 kg	1500 kg	2000 kg
Max. operating intensity	40 %	40 %	40 %
Maximum rotation torque	40 Nm	50 Nm	55 Nm
Travel speed	10,5 m / Min	10,5 m / Min	10,5 m / Min
Overload protection	Thermal sensor	Thermal sensor	Thermal sensor
Motor power rating	300 W	420 W	480 W
Power supply	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz

CX1000 - CX1500 - CX2000 - CX2000/400V

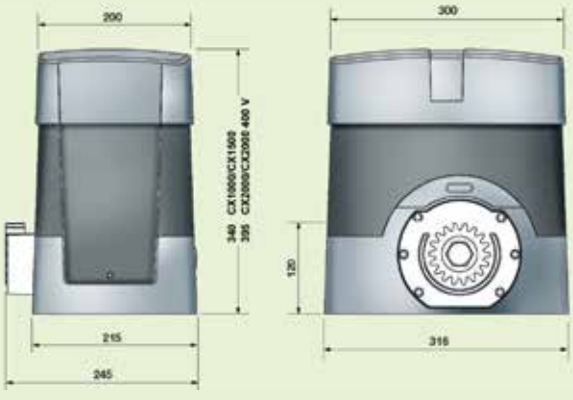

C Line 400V

Operator type	CX2000/400 V
Maximum gate weight	2000 kg
Maximum operating intensity	60 %
Maximum rotation torque	60 Nm
Travel speed	10,5 m / Min
Overload protection	Thermal sensor
Motor power rating	600 W
Power supply	400 V / 50 Hz


SPECIAL GEAR FOR STEEL CANTILEVER GATE UP TO: 4 M WIDTH AND 200 KG.

GEAR	
9050 GPAF	Gear including: - 2 carriages 9952 PAF - 2 end wheels 1051 G - 2 bottom end guides 1050 E - 2 upper guides 1062

TRACK	
9050/600	Galvanized steel for carriages 9952 PAF. Length = 6 m.
9050N/600	Plain steel for carriages 9952 PAF. Length = 6 m.





Steel cantilever gate structure:

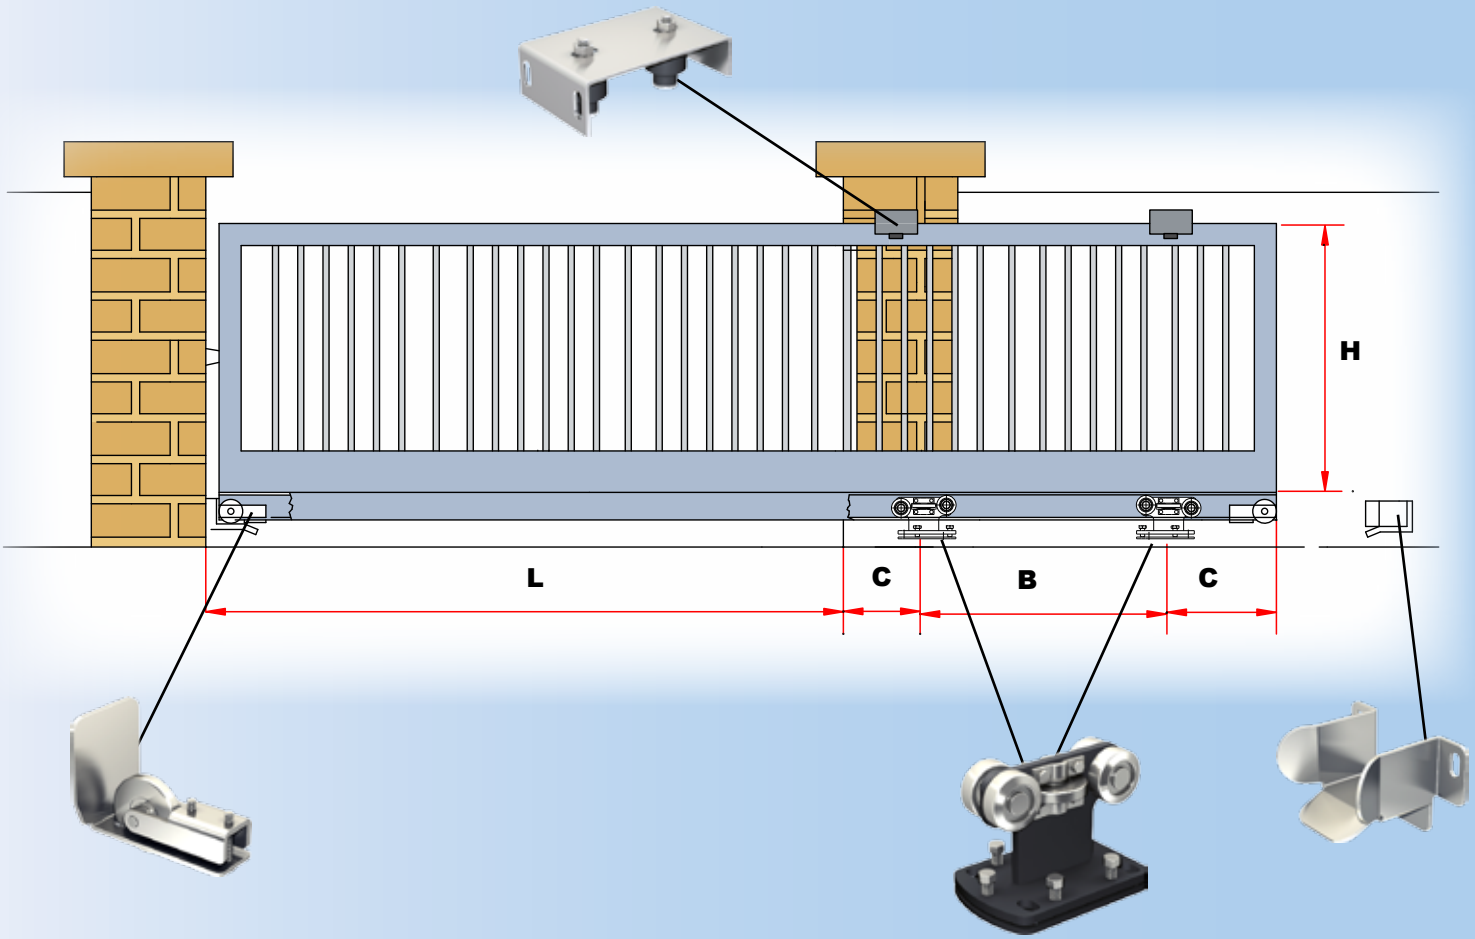




CAST IRON WHEELS for round or square tracks

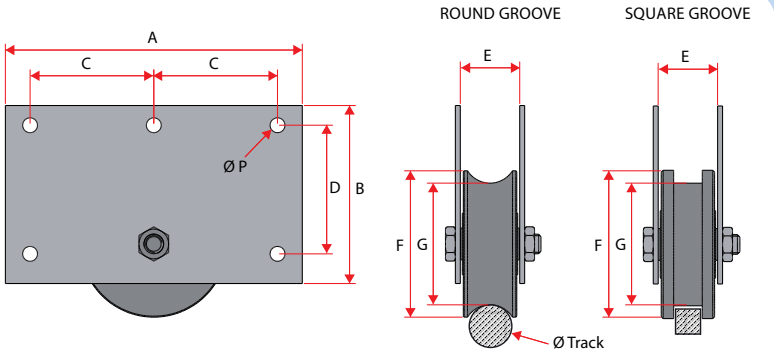

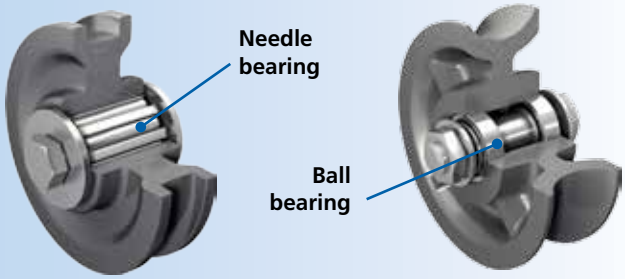


CAST IRON WHEELS with ROUND GROOVE WHEEL							
Item Nr.	Capacity /wheel	Needle bearing	Ball bearing	F	G	Ø track	Ø screw
1008 GR	150 Kg	✓		102	83	20	M 12x60
1009 GR	250 Kg		✓	150	123	30	M 20x100
1010 GR	500 Kg		✓	180	152	35	M 20x100



Round groove wheel

CAST IRON WHEELS with SQUARE GROOVE WHEEL							
Item Nr.	Capacity /wheel	Needle bearing	Ball bearing	F	G	□	Ø screw
1008 GC	150 Kg	✓		102	86	14x14	M 12x60
1009 GC	250 Kg		✓	150	124	25x25	M 20x100
1010 GC	500 Kg		✓	180	154	30x30	M 20x100



Square groove wheel

ROUND GROOVE WHEEL (galvanised steel side plates and cast iron rollers)								
Item Nr.	Equipped with the wheel	Capacity /wheel	A	B	C	D	E	Ø P
980 GR	1008 GR	150 Kg	220	140	90	95	43	11
990 GR	1009 GR	250 Kg	300	180	125	130	60	15
1000 GR	1010 GR	500 Kg	300	180	125	130	71	15


SQUARE GROOVE WHEEL (galvanised steel side plates and cast iron rollers)								
Item Nr.	Equipped with the wheel	Capacity /wheel	A	B	C	D	E	Ø P
980 GC	1008 GC	150 Kg	220	140	90	95	43	11
990 GC	1009 GC	250 Kg	300	180	125	130	60	15
1000 GC	1010 GC	500 Kg	300	180	125	130	71	15



Wheel

FOR EFFORTLESS FRICTION WE





SCREWING TYPE TRACKS FOR ROUND GROOVE WHEEL - Galvanized steel - Length 3 m	
20012 RV/3	D = 12 / d = 8 / e = 2 / H = 10 / P = 6,5 / L = 60
20015 RV/3*	D = 15 / d = 11,5 / e = 1,8 / H = 14 / P = 6,5 / L = 56
20016 RV/3	D = 15,5 / d = 10,5 / e = 2,5 / H = 16 / P = 6,5 / L = 60
20020 RV/3	D = 19 / d = 12 / e = 3,5 / H = 15 / P = 8,5 / L = 80
20021 RV/3	D = 19 / d = 13 / e = 3 / H = 16 / P = 6,5 / L = 60

* *maximum gate weight = 400 Kg*




JOINTING BRACKET	
20015 M	for profile 20015 RV/3
20016 M	for profile 20016 RV/3 and 20020 RV/3
20020 M	for profile 20021 RV/3

ALL OUR WHEELS

STEEL WHEELS

Round groove wheels	"V" shape groove wheels	Capacity /wheel**	Capacity /bearing	Ø D	A	B	C	Screw dimension
-	20061 V10	100 Kg	315 Kg	60	10	14	19	M 10x45
20061 R12	20061 V12	100 Kg	315 Kg	60	12	16	19	M 10x45
20061 R16	-	100 Kg	315 Kg	60	16	20	32	M 10x60
20081 R12	20081 V12	200 Kg	455 Kg	80	12	16	32	M 14x70
20081 R16	-	200 Kg	455 Kg	80	16	20	32	M 14x70
20081 R21	20081 V20	200 Kg	455 Kg	80	21	25	32	M 14x70
20091 R12	20091 V12	200 Kg	455 Kg	90	12	16	32	M 14x70
20091 R16	-	200 Kg	455 Kg	90	16	20	32	M 14x70
20101 R12	20101 V12	200 Kg	455 Kg	100	12	16	32	M 14x70
20101 R16	-	200 Kg	455 Kg	100	16	20	32	M 14x70
20101 R21	20101 V20	200 Kg	455 Kg	100	21	25	32	M 14x70
20100 R21*	20100 V20*	400 Kg	670 Kg	100	21	25	32	M 14x70
20121 R16	-	225 Kg	455 Kg	120	16	20	32	M 14x70
20121 R21	20121 V20	225 Kg	455 Kg	120	21	25	32	M 14x70
20120 R21*	20120 V20*	500 Kg	670 Kg	120	21	25	32	M 14x70
20141 R16	-	250 Kg	455 Kg	140	16	20	32	M 14x70
20141 R21	20141 V20	250 Kg	455 Kg	140	21	25	32	M 14x70
20140 R21*	20140 V20*	550 Kg	670 Kg	140	21	25	32	M 14x70
20161 R16	-	300 Kg	455 Kg	160	16	20	32	M 14x70
20161 R21	20161 V20	300 Kg	455 Kg	160	21	25	32	M 14x70
20160 R21*	20160 V20*	700 Kg	880 Kg	160	21	25	32	M 16x70
20200 R21*	20200 V20*	750 Kg	880 Kg	200	21	25	32	M 16x70



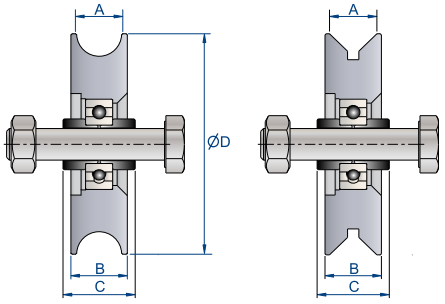


* *Reinforced bearing*


** *The weight of the gate determines the choice of roller.*




STEEL WHEELS - WELDING TYPE


Round groove wheels	Capacity /wheel**	Capacity /bearing	Ø D	L	A	B	C	D	E	F
23081R16	200 Kg	455 Kg	80	80	16	20	34,5	60	18	44,5
23081R21	200 Kg	455 Kg	80	80	21	25	34,5	60	18	44,5
23101R16	200 Kg	455 Kg	100	100	16	20	34,5	76	22	44,5
23101R20	200 Kg	455 Kg	100	100	20	25	34,5	76	22	44,5
23100R20*	400 Kg	670 Kg	100	100	20	25	36,5	76	22	46,5
23121R20	225 Kg	455 Kg	120	120	20	25	34,5	96	22	44,5
23120R20*	500 Kg	670 Kg	120	120	20	25	36,5	96	22	46,5






RECOMMENDED TO USE OUR TRACKS





SCREWING TYPE TRACK FOR TRIANGULAR GROOVE WHEEL Galvanized steel - Length 3 m	
20021 VV/3	H = 17 / P = 6,5 / L = 65 / e = 3






SEALING TYPE TRACK FOR ROUND GROOVE WHEEL Galvanized steel - Length 3 m	
20021 RS/3	D = 19 / e = 3 / H = 60

ARE WHITE ZINC PLATED




* *Reinforced bearing*

** *The weight of the gate determines the choice of roller.*

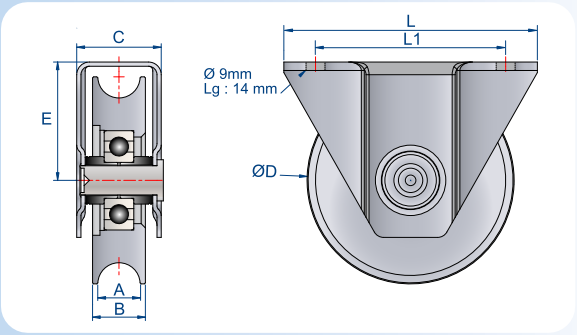


WHEELS WITH STEEL EXTERNAL PLATE										
Round groove wheels	"V" shape groove wheels	Capacity / wheel**	Capacity /bearing	Ø D	L	L1	A	B	C	E
21081 R16	-	200 Kg	455 Kg	80	120	90	16	20	40	46
21081 R21	21081 V20	200 Kg	455 Kg	80	120	90	21	25	40	46
21101 R16	-	200 Kg	315 Kg	100	120	90	16	20	40	56
21101 R21	21101 V20	200 Kg	455 Kg	100	120	90	21	25	40	46
21100 R21*	21100 V20*	400 Kg	670 Kg	100	120	90	21	25	40	56



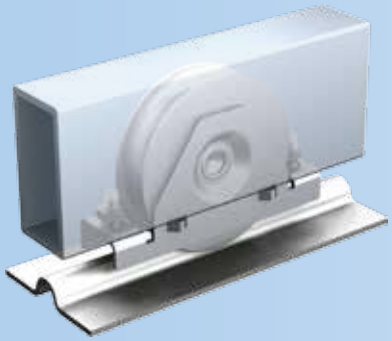

EASY and QUICK mounting, minimal space between the gate and the ground, welding or screwing type.


to be fitted in a 40 mm section tube

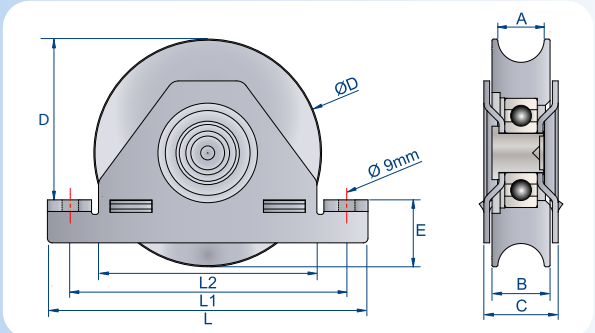

WHEELS WITH STEEL INTERNAL PLATE												
Round groove wheels	"V" shape groove wheels	Capacity /wheel**	Capacity /bearing	Ø D	L	L1	L2	A	B	C	D	E
22081 R16	-	200 Kg	455 Kg	80	138	119	98	16	20	32	52.5	25.5
22081 R21	22081 V20	200 Kg	455 Kg	80	138	119	98	21	25	32	52.5	25.5
22101 R16	-	200 Kg	455 Kg	100	138	119	98	16	20	32	69	35.5
22101 R21	22101 V20	200 Kg	455 Kg	100	138	119	98	21	25	32	69	35.5
22100 R21*	22100 V20*	400 Kg	670 Kg	100	138	119	98	21	25	32	69	35.5
22121 R16	-	225 Kg	455 Kg	120	186	162	138	16	20	32	73.5	45.5
22121 R21	22121 V20	225 Kg	455 Kg	120	186	162	138	21	25	32	73.5	45.5
22120 R21*	22120 V20*	500 Kg	670 Kg	120	186	162	138	21	25	32	79.5	45.5
22141 R16	-	250 Kg	455 Kg	140	186	162	138	16	20	32	89.5	48.5
22141 R21	22141 V20	250 Kg	455 Kg	140	186	162	138	21	25	32	89.5	48.5
22140 R21*	22140 V20*	550 Kg	670 Kg	140	186	162	138	21	25	32	89.5	48.5


GEAR FOR SLIDING GATES WITH BALL BEARING WHEELS: 400 AND 800 KG400 ET 800 KG

GEAR for 400 KG manual gate	
20016 RG	Gear including: - 2 steel wheels with internal plate 22081R16 - 2 jointing brackets for profile 20016M - 2 upper-guides 1062 - 1 stopper screwing type 2099 V - 1 lock 957 (Ø 7) - 1 double handle 1295/60 (Ø 7)

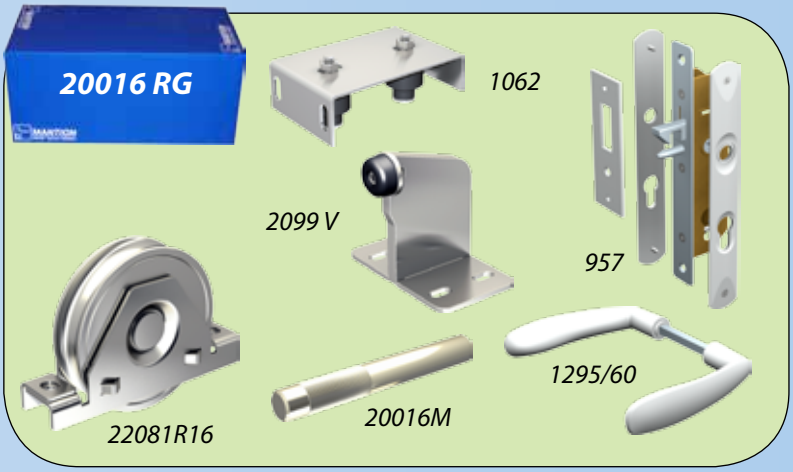

GEAR for 400 Kg motorized* gate	
20116 RG	Gear including: - 2 steel wheels with internal plate 22081R16 - 2 jointing brackets for profile 20016M - 2 upper-guides 1062 - 1 stopper screwing type 2099 V

motorisation is not included

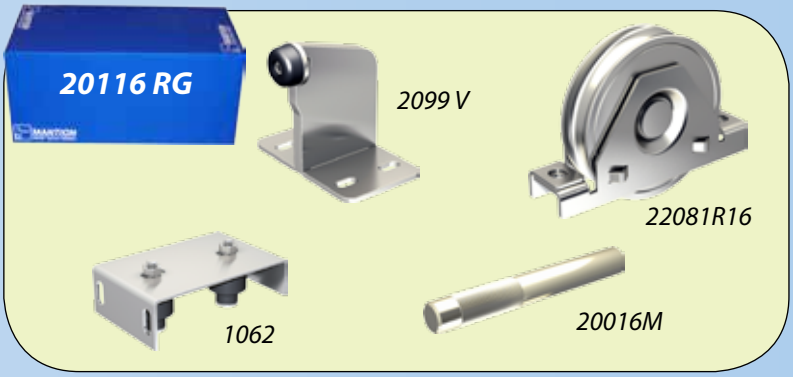

16 mm Ø track for gates up to 400 Kg	
20016 RV/3	Galvanised steel track - Screwing type Length = 3 m - Width = 60 mm - Thickness = 2.5 mm
20 mm Ø track for gates up to 800 Kg	
20021 RV/3	Galvanised steel track - Screwing type Length = 3 m - Width = 60 mm - Thickness = 3 mm
20021 RS/3	Galvanised steel track - Sealing type Length = 3 m - Width = 60 mm - Thickness = 3 mm




20016 RV/3 / 20021 RV/3




20021 RS/3

GEAR for 800 KG manual gate	
20021 RG	Gear including: - 2 steel wheels with internal plate 22100R21 - 2 jointing brackets for profile 20020M - 1 upper-guide 1065 - 1 stopper screwing type 2099 V - 1 lock 957 (Ø 7) - 1 double handle 1295/60 (Ø 7)

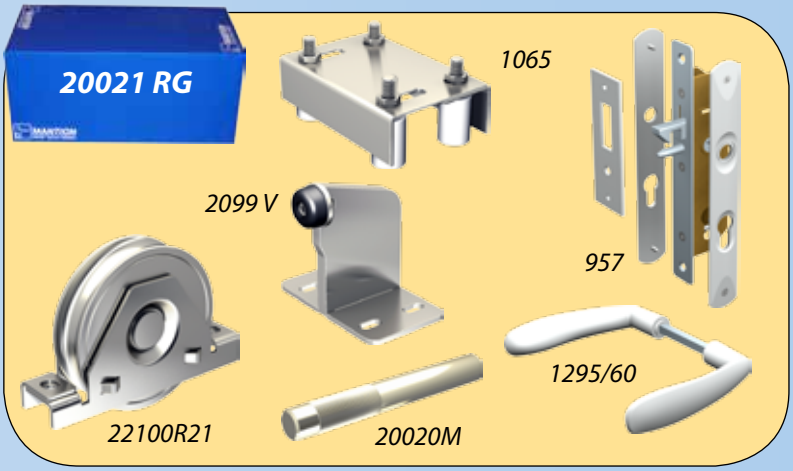

GEAR for 800 Kg motorized* gate	
20121 RG	Gear including: - 2 steel wheels with internal plate - 2 jointing brackets for profile 20020M - 1 upper-guide 1065 - 1 stopper screwing type 2099 V


motorisation is not included

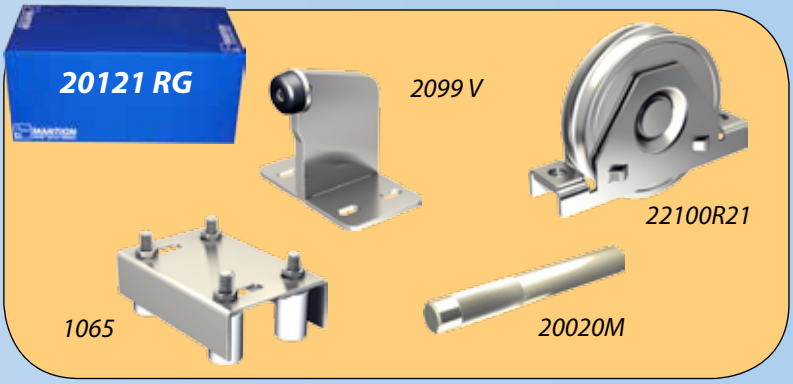


STAINLESS STEEL TRACKS - Screwing and sealing type


SCREWING TYPE TRACKS FOR ROUND GROOVE WHEEL	
20020 RVX/3	STAINLESS STEEL track Ø 19 - Length = 3 m.
20020 M	Jointing bracket.


SEALING TYPE TRACKS FOR ROUND GROOVE WHEEL	
20021 RSX/3	STAINLESS STEEL track Ø 19 - Length = 3 m.




Jointing bracket for screwing type track (round groove wheel)











STAINLESS STEEL WHEELS on round tracks



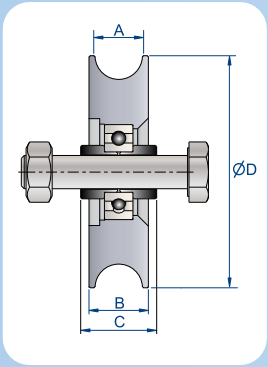



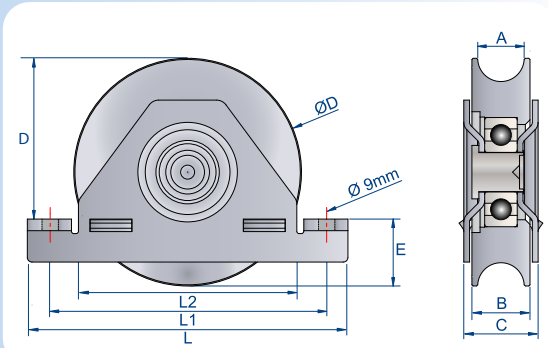

STAINLESS STEEL WHEELS							
Round groove wheels	Capacity /wheel**	Capacity /bearing	Ø D	A	B	C	Screw dimension
20100 R21 X	400 kg	670 kg	100	21	25	32	M 14x70
20120 R21 X	500 kg	670 kg	120	21	25	32	M 14x70

WHEELS WITH STAINLESS STEEL INTERNAL PLATES											
Round groove wheels	Capacity /wheel**	Capacity /bearing	Ø D	L	L1	L2	A	B	C	D	E
22100 R21 X	400 kg	670 kg	100	138	119	98	21	25	32	69	35.5
22120 R21 X	500 kg	670 kg	120	186	162	138	21	25	32	79.5	38.5

** *The weight of the gate determines the choice of roller.*

STAINLESS STEEL ACCESSORIES



lock ***954 X***
see detail on page 24



lock ***1290 X***
see detail on page 24




guide ***23040 X***
see detail on page 26

HOOK LOCKS

HOOK LOCKS with 8 mm square	
Item Nr.	**Designation**
954	Hook lock in galvanised steel. Supplied with European Cylinder and 3 keys. A = 96 ; B = 60 ; C = 174
954 X	Hook lock in stainless steel. Supplied with European Cylinder and 3 keys. A = 96 ; B = 60 ; C = 174
955	Monoblock lock, in galvanised steel. Supplied with a strike without cylinder. A = 96 ; B = 60 ; C = 174
954 C40	Box for lock 954 and 955. For a ⍁ 40 mm tube. A = 65 ; B = 20 ; C = 40
954 C50	Box for lock 954 and 955. For a ⍁ 50 mm tube. A = 65 ; B = 10 ; C = 50




954
955

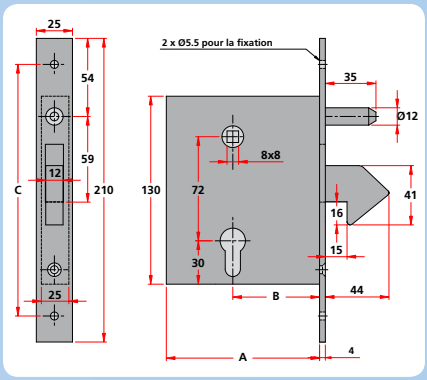





954 C

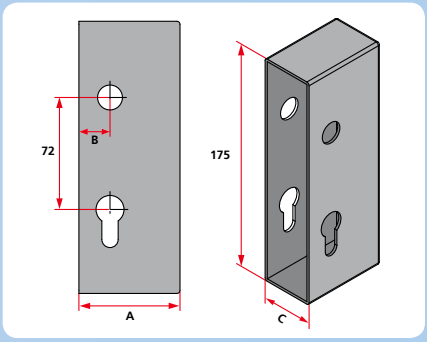

HOOK LOCKS with 7 mm square	
Item Nr.	**Designation**
957	Frame and mechanism in stainless steel, sliding bolt and end section in STAINLESS STEEL. Handle plates white prepainted aluminium. Keeper of lock in white prepainted brass. For European profile cylinder of 54 mm.

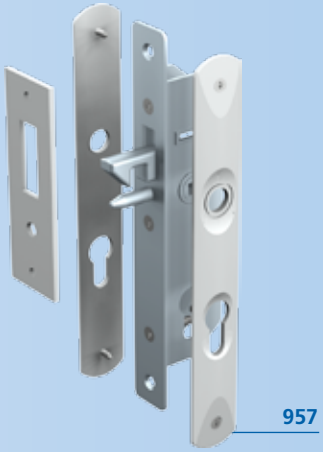

957

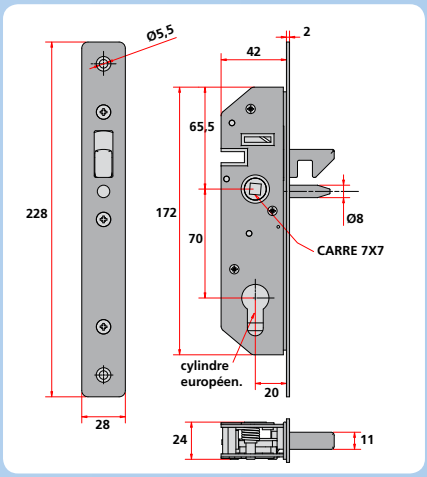


LEVER HANDLES and PULLS

LEVER HANDLES FOR LOCKS with 8 mm square	
Item Nr.	**Designation**
1295/50	Double handle in Zamak. For 25 to 40 mm tubes. Cone-point set screw - 8 mm square.
1295/70	Double handle in Zamak. For 30 to 70 mm tubes. Cone-point set screw - 8 mm square.
LEVER HANDLES FOR LOCKS with 7 mm square	
1295/60	Handle in white painted aluminium. For 30 to 70 mm tubes. 7 mm square (For locks Nr 957).
Screwing type HANDLES	
1290	Dished flush pull in galvanized steel handle. Height = 200 mm - width = 90 mm.
1290 X	Dished flush pull in stainless steel handle. Height = 200 mm - width = 90 mm.
1297	Handle on a 265 mm plate in galvanized steel.
1298	Pressed handle with fastening hooks in galvanized steel. Length = 245 mm.



1295

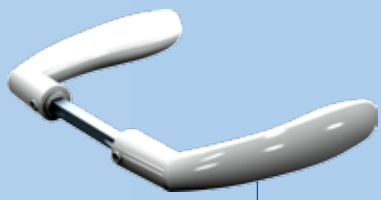

1295/60



1290



1297



1298

ideal for residential environments (moderate usage)

24V MOTORIZATION KIT FOR SLIDING GATE (with receiver + 1 four-channel remote control + orange light)	
Item Nr.	**Designation**
C0003350	**C300** motor, maximum force 650 N for sliding gates weighing up to **300 kg** and 6 m wide. (without rack)
C0003360	**C500** motor, maximum force 1000 N for sliding gates weighing up to **500 kg** and 8 m wide. (without rack)
C0003370	**C800** motor, maximum force 1200 N for sliding gates weighing up to **800 kg** and 10 m wide. (without rack)
C0003380	M4K nylon rack with steel core. Length = 1 m.

C300 - C500 - C800





orange light



remote control

The C Line is characterized by its compact and robust box comprising a galvanized aluminium block and a plastic cover. Its reliable electronics guarantees you completely safe operation.
The **C300**, **C500** and **C800** PLCs are **EN 13241-1**-certified without the use of feeler strips.
Optimal levels of safety thanks to obstacle detection.

ideal for professional environments (intensive usage)

230 V MOTORIZATION KIT FOR SLIDING GATE (with receiver + 1 four-channel remote control + orange light)	
Item Nr.	**Designation**
C0003400	**CX1000** motor, maximum force 1000 N for sliding gates weighing up to **1000 kg** (without rack).
C0003410	**CX1500** motor, maximum force 1500 N for sliding gates weighing up to **1500 kg** (without rack).
C0003420	**CX2000** motor, maximum force 2000 N for sliding gates weighing up to **2000 kg** (without rack).
2222 CR	Rack for motorized gates Length = 1 m. Module 4 - 22mm x 22mm in galvanized steel.

SAFETY EDGE	
C0003850	8.2KOhm Safety edge. L = 1500 mm.
C0003860	8.2KOhm Safety edge. L = 2000 mm
C0003890	DUS1 Radio transmitter, 868 MHz, for 1 safety edge.
C0003900	DUS2 Radio transmitter, 868 MHz, for 2 safety edges.
C0003920	Safety edge cutting kit.

400 V MOTORIZATION KIT FOR SLIDING GATE (with receiver + 1 four-channel remote control + orange light)	
Item Nr.	**Designation**
C0003450	**CX2000/400 V** SET motor, maximum force 2000 N, for sliding gates weighing up to **2000 kg** (without rack).
C0003455	Rack for motorized gates. Length = 2 m. Module 6 - in galvanized steel.

ACCESSORIES CONTROL	
Item Nr.	**Designation**
C0003700	BHS110 1-channel remote control.
C0003710	BHS130 3-channel remote control.
C0003720	BHS140 4-channel remote control.
C0003750	BHS221 Blue car2 remote control, 2-channel.
C0003760	EWLS AP4 photoelectric cell.

RACK and PINS	
C0003380	M4K nylon rack with steel core. Length = 1 m.
2222 CR	Rack for motorized gates. Length = 1 m. Module 4 - 22mm x 22 mm in galvanized steel.
3012 CR	Rack for motorized gates. Length = 1 m. Module 4 - Drilled for a M8 screw - 30 mm x 12 mm in black vernish steel. 3 pins/rack.
1708 PL	Pins in galvanized steel for rack fixing. Screw M8. Height = 27 mm.
1708 PLC	Pins in galvanized steel for rack fixing. Screw M8. Height = 16 mm.

CX1000 - CX1500
CX2000 - CX2000/400V





orange light



remote control

Soft starting and stopping (Soft-Start / Soft-Stop).



C0003890



C0003900



C0003700



C0003720




C0003850




C0003750



C0003380




C0003760



2222 CR




1708 PL
1708 PLC





3012 CR


GUIDES - SQUARE STEEL PILLARS COVERS AND STOPPERS

GUIDES	
Item Nr.	**Designation**
1052	Adjustable upper guide, sealing type. For bottom sliding gate. Equipped with guide 1050.
1052 L	Ditto equipped with the guide 23040 L.
1053	Adjustable upper guide, screwing type. For bottom sliding gate. Equipped with the guide 1050.
1053 L	Ditto equipped with the guide 23040 L.
1050	Guide without plate mounted on needle bearing with a nylon olive. Installed on the guides 1052 and 1053. Ø 50 - Height = 25 mm
1059	Lower guide mounted on needle bearing with a nylon olive and fixed on a screwing plate. For U 50 x 60. Ø 50 - Height = 25 mm.
1115/600	U-profile 50 x 60 in galvanized steel. Length = 6 meters.
23025	Guide with a nylon olive. A = 65 - B = 25 - C = 35 - D = 14
23030	Guide with a nylon olive. A = 80 - B = 30 - C = 40 - D = 14
23040 B	Guide with a convex nylon olive. A = 84 - B = 40 - C = 40 - D = 14
23040	Guide with a nylon olive. A = 84 - B = 40 - C = 40 - D = 14
23040 L	Long guide with a nylon olive. A = 102 - B = 40 - C = 60 - D = 16
23040 X	Guide with a stainless steel shaft and a nylon olive. A = 84 - B = 40 - C = 40 - D = 14
1062	Upper guide with two adjustable nylon olives, Ø 40 for 40 to 70 mm tube. Length = 105 mm.
1064	Upper guide with four adjustable nylon olives, Ø 40 for 40 to 70 mm tube. Length = 245 mm.
1065	Adjustable upper guide with four adjustable nylon olives, Ø 40 for 40 to 60 mm tube. Length = 220 mm.
0CP20	Square steel pillar cover to be welded, 20 x 20 mm.
0CP30	Ditto 30 x 30 mm.
0CP40	Ditto 40 x 40 mm.
0CP50	Ditto 50 x 50 mm.
0CP60	Ditto 60 x 60 mm.
0CP80	Ditto 80 x 80 mm.
0CP100	Ditto 100 x 100 mm.
0CP120	Ditto 120 x 120 mm.
0CP150	Ditto 150 x 150 mm.
2099	Galvanized stopper, welding type. For bottom sliding gates.
2099 V	Ditto screwing type.

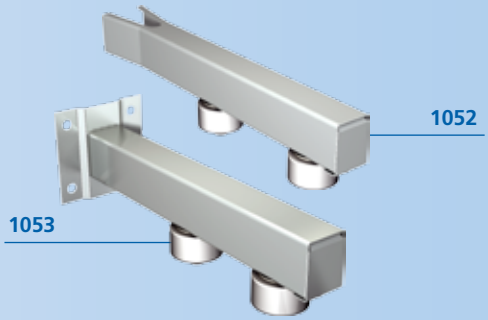

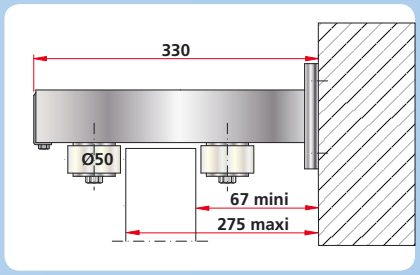


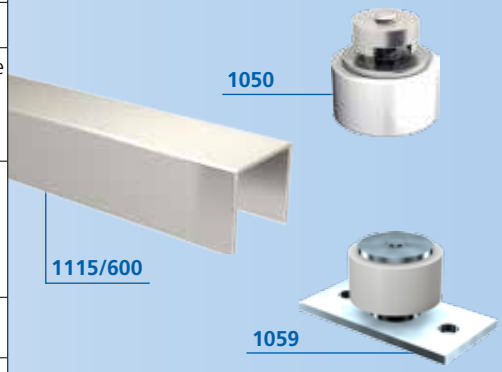


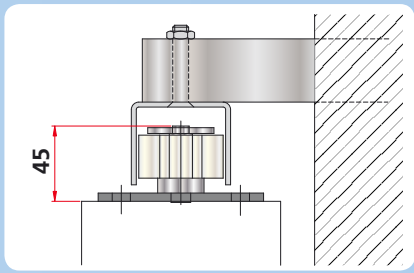










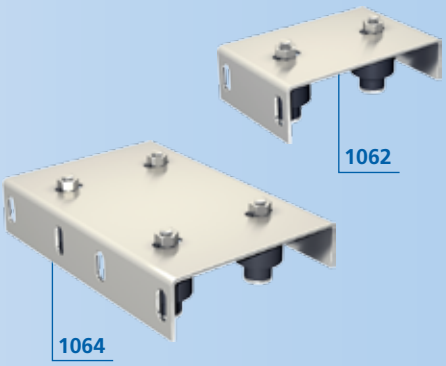

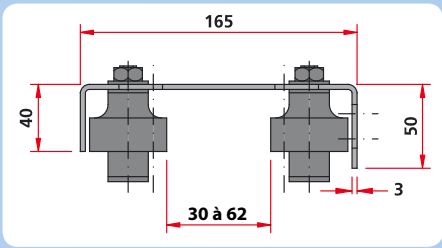















CAST IRON PIVOTS for panels up to 80 KG		
25040 BS	Cast iron pivot, welding type, including (for panels up to 200 Kg): - 1 upper part - 1 lower part (on ball), for tubular profile of Ø 40	Pivot Ø 35 mm
25050 BS	Cast iron pivot, welding type, including (for panels up to 250 Kg): - 1 upper part - 1 lower part (on ball), for tubular profile of Ø 50	Pivot Ø 45 mm




PIVOTS WITH BRACKETS for panels up to 80 KG		
25040 S	Pivot for panel in Ø 40 tube, sealing type.	Pivot Ø 35 mm
25040 V	Pivot for panel in Ø 40 tube, screwing type.	
25050 S	Pivot for panel in Ø 50 tube, sealing type.	Pivot Ø 45 mm
25050 V	Pivot for panel in Ø 50 tube, screwing type.	

ALL PIVOTS ARE EQUIPPED WITH A GREASER

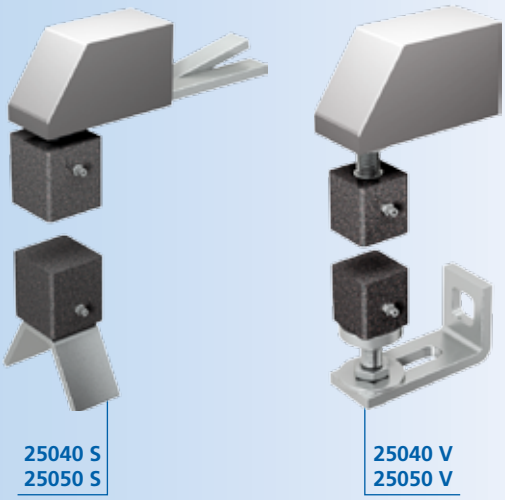


EXTENSIBLE HINGE - WELDING TYPE	
25060 SO	Hinge, welding type - +/- 5 mm extensible. This hinge allows a setting of 10 mm. Just loosen the bottom nut and tighten once the required position is obtained.







HINGES - WELDING TYPE opening 180°										
Item Nr.	A	B	R	C	D	E	F	G	H	Panel weight
25164 SO	50	100	65 to 83	42	M16	40	42	22	8	80 kg
25184 SO	50	100	60 to 80	42	M18	40	42	22	8	100 kg
25204 SO	50	100	60 to 80	42	M20	40	42	22	8	100 kg
25224 SO	60	120	75 to 95	35	M22	70	42	22	10	150 kg
25244 SO	60	120	75 to 95	35	M24	70	42	22	10	150 kg

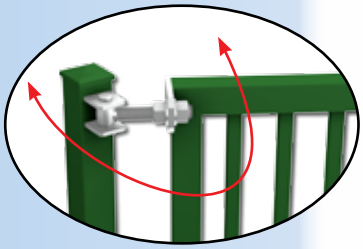

opening 180° !






HINGES ON PLATE - SCREWING TYPE

Item Nr.	A	B	R	C	D	E	F	Panel weight
25165	80	76	25 to 34	25	M16	42	35	100 kg
25185	100	80	25 to 38	25	M18	42	35	150 kg
25205	100	84	25 to 42	25	M20	42	35	150 kg
25225	120	88	29 to 45	29	M22	42	35	200 kg
25245	120	92	29 to 50	29	M24	42	35	200 kg




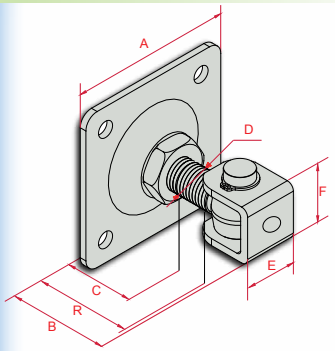


ADJUSTABLE HINGES FOR PANELS UP TO 300 KG

HINGES - SEALING TYPE with screwing type cap

Item Nr.	A	R	C	D	E	Panel weight
25162	60	42 to 60	25	M16	38	80 kg
25182	64	42 to 62	25	M18	38	100 kg
25202	75	40 to 62	25	M20	38	100 kg
25222	80	43 to 66	25	M22	38	150 kg
25242	80	43 to 69	25	M24	38	150 kg






HINGES - SEALING TYPE with welding type cap

25162 SO	60	42 to 60	25	M16	38	80 kg
25182 SO	64	42 to 62	25	M18	38	100 kg
25202 SO	75	40 to 62	25	M20	38	100 kg
25222 SO	80	43 to 66	25	M22	38	150 kg
25242 SO	80	43 to 69	25	M24	38	150 kg






HINGES - WELDING TYPE with screwing type cap


Item Nr.	A	R	C	D	E	Panel weight
25163	76	10 to 30	25	M16	34	100 kg
25183	80	12 to 34	25	M18	34	150 kg
25203	84	14 to 38	25	M20	34	150 kg
25223	88	14 to 41	25	M22	34	200 kg
25243	92	17 to 46	25	M24	34	200 kg






HINGES - WELDING TYPE with welding type cap


25163 SO	74	10 to 30	25	M16	34	100 kg
25183 SO	78	12 to 34	25	M18	34	150 kg
25203 SO	82	14 to 38	25	M20	34	150 kg
25223 SO	86	14 to 41	25	M22	34	200 kg
25243 SO	90	17 to 46	25	M24	34	200 kg






HINGES - SCREWING TYPE with screwing type cap


Item Nr.	A	B	C	D	E	Panel weight
25163 L	172	125	25	M16	38	100 kg
25183 L	182	135	25	M18	38	150 kg
25203 L	192	143	25	M20	38	200 kg
25223 L	202	152	25	M22	38	200 kg
25243 L	212	160	25	M24	38	300 kg




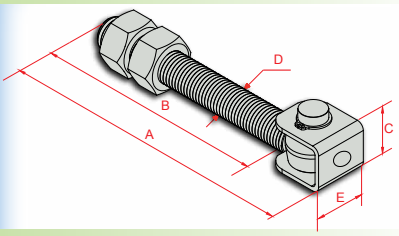

HINGES - SCREWING TYPE with welding type cap


25163 SOL	170	125	25	M16	38	100 kg
25183 SOL	180	135	25	M18	38	150 kg
25203 SOL	190	143	25	M20	38	200 kg
25223 SOL	200	152	25	M22	38	200 kg
25243 SOL	210	160	25	M24	38	300 kg




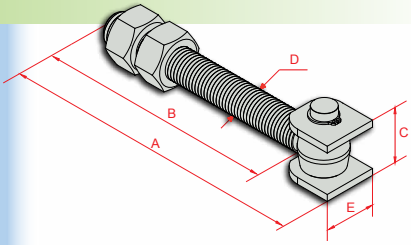

PIVOT WITH BALL BEARING FOR PANELS WEIGHING UP TO 750 KG

ADJUSTABLE PIVOTS - WELDING TYPE	
Item Nr.	**Designation**
25051 X	Stainless steel pivot Ø 50, with welding fastener for heavy manual or motorized panels. Adjustable on the upper part. Including: - upper part - lower part
25051	Galvanized steel pivot Ø 50, with welding fastener for heavy manual or motorized panels. Adjustable on the upper part. Including: - upper part - lower part
25051 B	Lower part of pivot 25051.
25051 H	Partie haute du pivot 25051.
25071	Galvanized steel pivot Ø 70, with welding fastener for heavy manual or motorized panels. Including: - upper part - lower part
25071 B	Lower part of pivot 25071.
25071 H	Upper part of pivot 25071.






Item Nr.	A	B	ØD	ØE	F
25051 X	100	50	50	25	77±7
25051	100	50	50	25	77±7
25071	120	60	70	30	97±7

ADJUSTABLE PIVOTS - SCREWING TYPE	
25052	Galvanized adjustable steel pivot Ø 50 with "L" screwing fastener, for heavy manual or motorized panels. Including: - upper part - lower part The screws enable an adjustment on both upper and lower part.
25052 B	Lower part of pivot 25052.
25052 H	Upper part of pivot 25052.
25072	Galvanized steel pivot Ø 70 with "L" fastener, for heavy manual or motorized panels. Including: - upper part - lower part The screws enable an adjustment on both upper and lower parts.
25072 B	Lower part of pivot 25072.
25072 H	Upper part of pivot 25072.





Item Nr.	A	B	C	ØD	ØE	F
25052	110	50	60	50	25	85±7
25072	130	60	60	70	30	108±7

PIVOTS 25051 and 25052								
Max. panel weight (Kg) according to width "L" and height "H"								
H \ L	1.5 m	2 m	2.5 m	3 m	3.5 m	4 m	4.5 m	5 m
1 m	350	350	300	250	214	187	166	150
1.5 m	350	350	350	350	320	280	250	225
2 m	350	350	350	350	350	350	333	300
2.5 m	350	350	350	350	350	350	350	350
3 m and +	350	350	350	350	350	350	350	350

PIVOTS 25071 and 25072										
Max. panel weight (Kg) according to width "L" and height "H"										
H \ L	1.5 m	2 m	2.5 m	3 m	3.5 m	4 m	4.5 m	5 m	5.5 m	6 m
1 m	750	750	600	500	428	375	333	300	272	250
1.5 m	750	750	750	750	643	562	500	450	409	375
2 m	750	750	750	750	750	750	666	600	545	500
2.5 m	750	750	750	750	750	750	750	750	681	625
3 m et +	750	750	750	750	750	750	750	750	750	750

ideal for residential environments (moderate usage)

24 V SWINGING GATES MOTOR (cylinder) (with receiver + 1 four-channel remote control + orange light)	
Item Nr.	**Designation**
C0003500	**DA20** motor (single gate), maximum force 2000 N for swinging gates weighing up to **220 kg** and **2.5 m** wide (per leaf).
C0003510	**DA20** motor (double gate), maximum force 2000 N for swinging gates weighing up to **220 kg** and **2.5 m** wide (per leaf).
C0003520	**DA40** motor (single gate), maximum force 2500 N for swinging gates weighing up to **400 kg** and **2.5 m** wide (per leaf).
C0003530	**DA40** motor (double gate), maximum force 2500 N for swinging gates weighing up to **400 kg** and **2.5 m** wide (per leaf).
C0003540	**DA40-L** motor (single gate), maximum force 2500 N for swinging gates weighing up to **400 kg** and **4 m** wide (per leaf).
C0003550	**DA40-L** motor (double gate), maximum force 2500 N for swinging gates weighing up to **400 kg** and **4 m** wide (per leaf).

DA20



DA40



ideal for professional environments (intensive usage)

SWINGING GATES MOTOR (articulated arm) (with receiver + 1 four-channel remote control + orange light)	
C0003460	**DX250SA-1** motor (single gate), maximum force 1500 N for swinging gates weighing up to **300 kg** and **2.5 m** wide (per leaf).
C0003470	**DX250SA-2** motor (double gate), maximum force 1500 N for swinging gates weighing up to **300 kg** and **2.5 m** wide (per leaf).
C0003480	**DX424SA** motor (single gate), maximum force 2000 N for swinging gates weighing up to **400 kg** and **4 m** wide (per leaf).
C0003490	**DX424SA** motor (double gate), maximum force 2000 N for swinging gates weighing up to **400 kg** and **4 m** wide (per leaf).

DX250SA



SWINGING GATES MOTOR (cylinder) (with receiver + 1 four-channel remote control + orange light)	
C0003635	**DX524-1** motor (single gate), maximum force 2000 N for swinging gates weighing up to **400 kg** and **5 m** wide (per leaf).
C0003645	**DX524-2** motor (double gate), maximum force 2000 N for swinging gates weighing up to **400 kg** and **5 m** wide (per leaf).

DX424SA



DX524





orange light



remote control

ACCESSORIES CONTROL - 868 MHz	
Item Nr.	**Designation**
C0003700	BHS110 1-channel remote control.
C0003710	BHS130 3-channel remote control.
C0003720	BHS140 4-channel remote control.
C0003750	BHS221 Blue car2 remote control , 2-channel.
C0003760	EWLS AP4 photoelectric cell.
C0003770	Electric lock ES FA 24V provides the gate with extra protection. The gate cannot suddenly open. The lock ensures that gates are electronically locked. In this way, they can be held fast at the gatepost. 24 V power supply.
C0003740	The LED SLK-L warning light flashes when the gate opens and closes guaranteeing even more safety. Supply voltage: 24 V.



C0003700




C0003710



C0003720



C0003750




C0003770



C0003760

Operator type	DA20	DA40	DA40-L
Maximum panel weight	220 kg	400 kg	400 kg
Maximum width of panel	2.5 m	2.5 m	4 m
Maximum height of panel	2 m	2 m	2 m
Maximum tractive force	2000 N	2500 N	2500 N
Opening time	16 - 32 Sec.	16 - 32 Sec.	16 - 32 Sec.
Power supply	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Motor voltage	24 VDC	24 VDC	24 VDC
Temperature range	-20... +60 C°	-20... +60 C°	-20... +60 C°

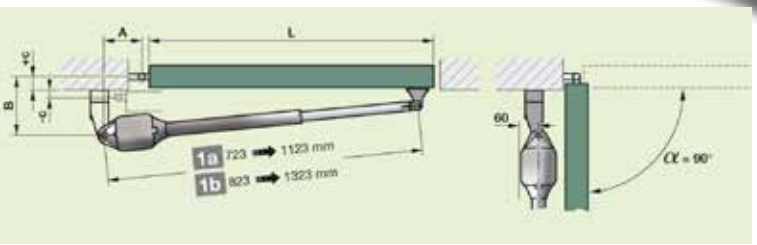

DA20 - DA40 1000 mm ≤ L ≤ 2500 mm - -30 mm ≤ c ≤ 150 mm


		A								
B(mm)	c(mm)	100	110	120	130	140	150	160	170	180
100	-30	95°	100°	105°	110°	115°	118°	120°	122°	125°
120	-10	95°	100°	105°	108°	112°	115°	117°	120°	122°
140	10	95°	100°	103°	105°	108°	112°	115°	118°	120°
160	30	95°	98°	100°	102°	105°	108°	112°	115°	110°
180	50	93°	96°	98°	100°	103°	105°	108°	103°	98°
200	70	93°	96°	98°	100°	103°	105°	100°	95°	92°
220	90	93°	95°	97°	99°	102°	97°	93°	90°	-
240	110	93°	95°	97°	99°	101°	90°	-	-	-
260	130	92°	94°	90°	-	-	-	-	-	-
280	150	90°	-	-	-	-	-	-	-	-

DA40-L 1500 mm ≤ L ≤ 4000 mm - -30 mm ≤ c ≤ 210 mm

		A								
B(mm)	c(mm)	100	110	120	130	140	150	160	170	180
100	-30	95°	100°	105°	110°	115°	118°	120°	122°	125°
120	-10	95°	100°	105°	108°	112°	115°	117°	120°	122°
140	10	95°	100°	103°	105°	108°	112°	115°	118°	120°
160	30	95°	98°	100°	102°	105°	108°	112°	115°	117°
180	50	93°	96°	98°	100°	103°	105°	108°	112°	114°
200	70	93°	96°	98°	100°	103°	105°	107°	110°	112°
220	90	93°	95°	97°	99°	102°	104°	107°	108°	110°
240	110	93°	95°	97°	99°	101°	103°	106°	106°	108°
260	130	92°	94°	97°	99°	100°	102°	105°	105°	105°
280	150	90°	94°	95°	98°	100°	102°	103°	96°	94°
300	170	90°	94°	95°	97°	99°	97°	93°	90°	
320	190	90°	93°	95°	93°	92°	-	-	-	
340	210	90°	93°	90°	-	-	-	-	-	


Operator type	DX250SA	DX424SA	DX524
Maximum panel weight	300 kg	400 kg	400 kg
Maximum width of panel	2.5 m	4 m	5 m
Maximum tractive force	-	-	2000 N
Opening time	16 Sec.	17 - 24 Sec.	20 - 40 Sec.
Power supply	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Motor voltage	24 VDC	24 VDC	24 VDC
Temperature range	-20... +60 C°	-20... +60 C°	-20... +60 C°

DX250SA

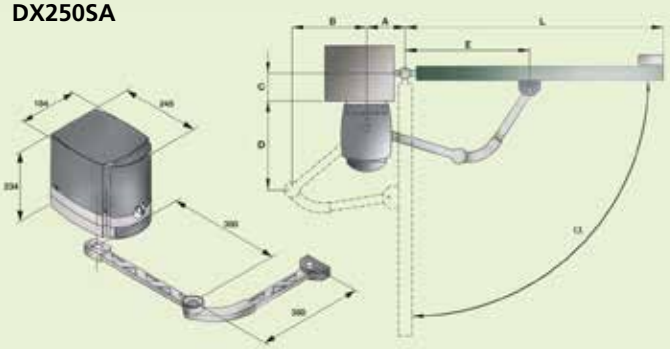

L(mm)	1000	1500	2000	2500				
Kg max	300	250	215	200				
A(mm)	140	140	140	140	160	200	200	200
B(mm)	253	261	264	260	220	147	327	309
C(mm)	0	50	100	150	185	200	0	100
D(mm)	382	373	370	375	412	417	266	305
E(mm)	470	470	470	470	470	440	420	420
α max	90°	90°	90°	90°	90°	90°	110°	105°


DX424SA

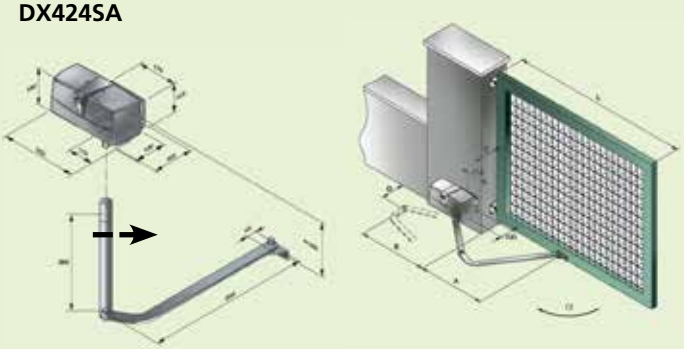

L(mm)	2000	2500	3000	3500	4000
Kg max	600	500	400	350	300
A(mm)	883	851	828	800	846
B(mm)	429	466	475	469	468
C(mm)	50	150	200	250	300
D(mm)	277	181	117	32	28
α max	90°	90°	90°	90°	90°

α max	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	t/90°	L(m)	Kg max
100°	150	150	90	82	845	25s	2 2,5 3 3.5	450 400 350 300
110°	175	175	110	97.5	855	30s	2,5 3 3,5 4	400 350 350 300
100°	200	200	130	118.5	850	34s	2,5 3 3,5 4 4,5 5	500 450 400 400 350 350
90°	225	225	150	139	852	38s	2,5 3 3,5 4 4,5 5	500 450 450 400 400 400

DX524

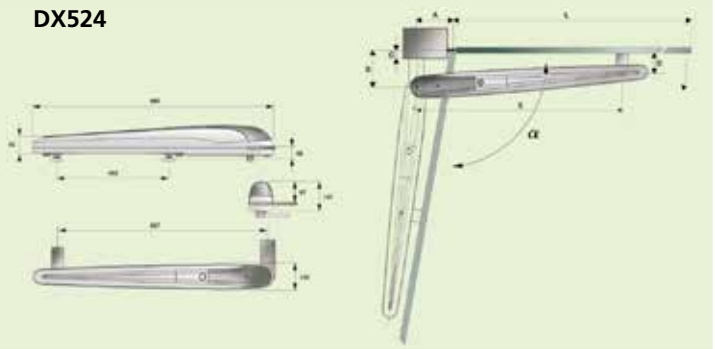

THERMOCONSTANT line

next generation system: no more inter-seasonal adjustments
very low variation in closing times because of changes in temperature

INVISIBLE DOOR-CLOSER

Capacity per door


CLOSING PIVOT KITS FOR DOORS		
Item Nr.	**Designation**	
25312 DT **25312 GT**	**85 kg**	Single action 180° pivot, integrable into tubular section from **40 mm**, for doors up to **1000 x 2000 max**. delivered with a top pivot (special for door). **16 N/m** closing strength. 25312 DT: right opening 25312 GT: left opening
25314 DT **25314 GT**	**130 kg**	Single action 180° pivot, integrable into tubular section from **40 mm**, for doors up to **1400 x 2100 max**. delivered with a top pivot (special for door). **20 N/m** closing strength. 25314 DT: right opening 25314 GT: left opening
25322 DT **25322 GT**	**200 kg**	Single action 180° pivot, integrable into tubular section from **50 mm**, for doors up to **1800 x 2400 max**. delivered with a top pivot (special for door). **49 N/m** closing strength. 25322 DT: right opening 25322 GT: left opening

DOOR CLOSING PIVOT KITS for doors



Top pivot, special for door

Bottom door closer




CLOSING PIVOT KITS FOR GATES		
25312 DT52 **25312 GT52**	**85 kg**	Set including: **25312 DT** invisible door closer reference and top pivot, **screwing type**. Integrable into tubular section from **40 mm**, for doors up to **1000 x 2000 max.** 25312 DT52: right opening 25312 GT52: left opening
25312 DT51 **25312 GT51**	**85 kg**	Set including: 25312 DT invisible door closer reference and top pivot, **welding type**. Integrable into tubular section from **40 mm**, for doors up to **1000 x 2000 max.** 25312 DT51: right opening 25312 GT51: left opening
25314 DT52 **25314 GT52**	**130 kg**	Set including: 25314 DT invisible door closer reference and top pivot, **screwing type**. Integrable into tubular section from **40 mm**, for doors up to **1400 x 2100 max.** 25314 DT52: right opening 25314 GT52: left opening
25314 DT51 **25314 GT51**	**130 kg**	Set including: 25314 DT invisible door closer reference and top pivot, **welding type**. Integrable into tubular section from **40 mm**, for doors up to **1400 x 2100 max.** 25314 DT51: right opening 25314 GT51: left opening

DOOR CLOSING PIVOT KITS for gates


Bottom door closer





Top pivot, screwing type


ou



Top pivot, welding type



© Normaclo gate

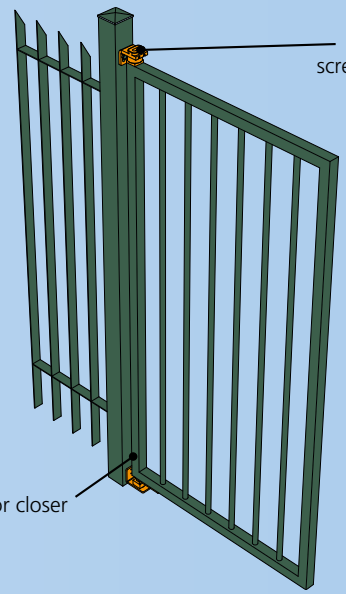

VARIATION IN CLOSING TIMES BETWEEN -10°C AND 35°C

25312 DT - 25312 GT : 14 sec. *(77 sec. for classic version)*
25314 DT - 25314 GT : 16 sec. *(116 sec. for classic version)*
25322 DT - 25322 GT : 28 sec. *(232 sec. for classic version)*

Item Nr.		Color	Dimensions of the door			Gate weight	Closing strength	Maximum opening angle
			Width	Height	Thickness			
25312 DT	Right opening	Khaki	1000 mm (Max)	2000 mm (Max)	40 mm (Min)	85 Kg (Max)	16 Nm	180° single action
25312 GT	Left opening	Grey						
25314 DT	Right opening	Khaki	1400 mm (Max)	2100 mm (Max)	40 mm (Min)	130 Kg (Max)	20 Nm	180° single action
25314 GT	Left opening	Grey						
25322 DT	Right opening	Khaki	1800 mm (Max)	2400 mm (Max)	50 mm (Min)	200 Kg (Max)	49 Nm	180° single action
25322 GT	Left opening	Grey						

KITS AVAILABLE FOR USE WITH DOORS OR GATES (SCREW- OR WELD-TYPE)

DOORS KITS:

25312 DT / 25312 GT : 85 Kg max.
25314 DT / 25314 GT : 130 Kg max.
25322 DT / 25322 GT : 200 Kg max.

door-only upper pivot delivered with the kit



KITS FOR GATES: screwing type:

25312 DT52 / 25312 GT52 : 85 Kg max.
25314 DT52 / 25314 GT52 : 130 Kg max.

gate-only screw-type upper pivot delivered with the kit




KITS FOR GATES: welding type:

25312 DT51 / 25312 GT51 : 85 Kg max.
25314 DT51 / 25314 GT51 : 130 Kg max.

gate-only weld-type upper pivot delivered with the kit



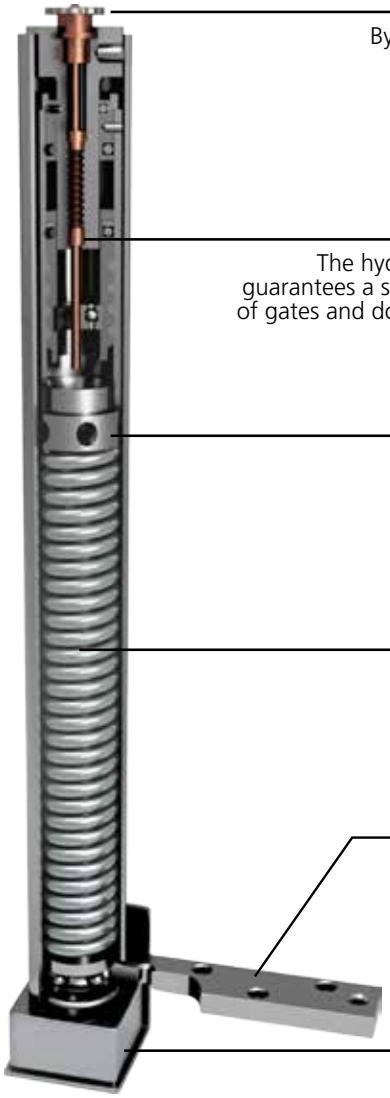

EASY SPEED ADJUSMENT

By moving the adjusting wheel in both direction.
High precision and large range of adjustment.

SMOOTH CLOSING

The hydraulic mechanism of this door closer guarantees a silent and smooth closing for all kinds of gates and doors and a durability of over 500 000 opening/closing cycles.

ADJUSTABLE CLOSING STRENGHT

Through adjustment of the spring.

HIGH-CLOSING STRENGHT

Door or gate closure is ensured by a special high-performance spring

EASY MOUNTING


The small sized fixing plate enables the utilization of this pivot for all types of doors and gates.


SLIDING SEAT


Facilitates this installation on site.


ACCESSORIES


Item Nr.	Designation
1297	Handle on a 265 mm plate in galvanized steel.
1298	Pressed handle with fastening hooks in galvanized steel. Length = 245 mm.
1314	Reinforced cane bolt. Screwing type. Length = 300 mm - Ø 14 mm.
1314 E	Reinforced narrow cane bolt 23 mm. Screwing type. Removable pin (2 positions). Length = 300 mm - Ø 14 mm.
1314 EF	Mounting kit for narrow reinforced cane bolt 23 mm (1314E and 1316E). Comprising 2 screw TF M8x30 and 2 inserts.
1314 SO	Cane bolt to weld, welding type. Length = 300 mm - Ø 14 mm.
1316	Reinforced cane bolt, screwing type. Height = 500 mm - Ø 16 mm.
1316 E	Reinforced narrow cane bolt 23 mm. Screwing type. Removable pin (2 positions). Length = 500 mm - Ø 16 mm.
1316 SO	Cane bolt to weld, welding type. Length = 500 mm - Ø 16 mm.
1316 B	Barrel bolt with cast iron chassis and steel cane and steel keeper. Weight = 660 gr. - Ø 16 mm.
1314 GP	Keeper of bolt for 1314 and 1314 SO.
1316 GP	Keeper of bolt for 1316 and 1316 SO.
1314 GE	Keeper of bolt for 1314 and 1314 SO. Inlet type.
1316 GE	Keeper of bolt for 1316 et 1316 SO. Inlet type.
1303 S	Adjustable swing gate stop with cataphoresis protection, sealing type. Adjustment = 40-70 mm. Height = 50 mm; Width = 40 mm; Length = 145 mm.
1303 V	Adjustable swing gate stop in galvanized steel, sealing type. Adjustment = 40-70 mm. Height = 120 mm; Width = 40 mm; Length = 145 mm.
2090 S	Middle gate stop, sealing type. Height = 85 mm; Width = 60 mm; Length = 100 mm.
2090 V	Middle gate stop, screwing type. Width = 60 mm; Length = 100 mm.
2097 S	Middle gate stop, sealing type. Height = 115 mm; Width = 100 mm; Length = 160 mm.
2097 V	Middle gate stop, screwing type. Height = 40 mm; Width = 100 mm; Length = 140 mm.

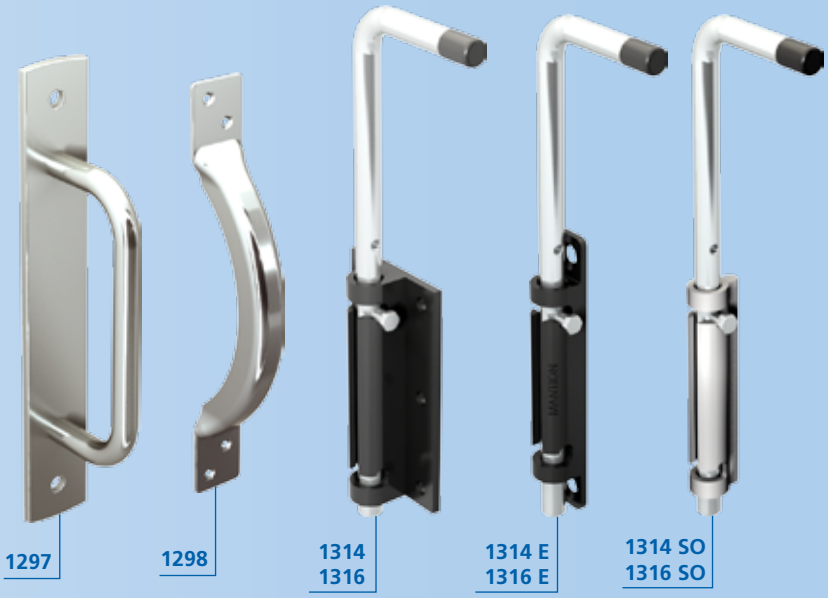

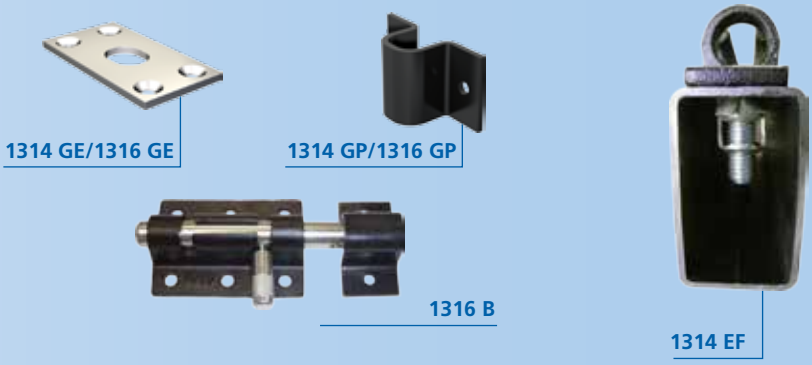

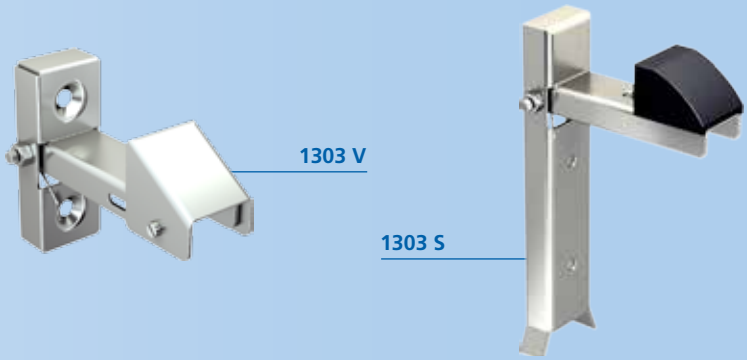

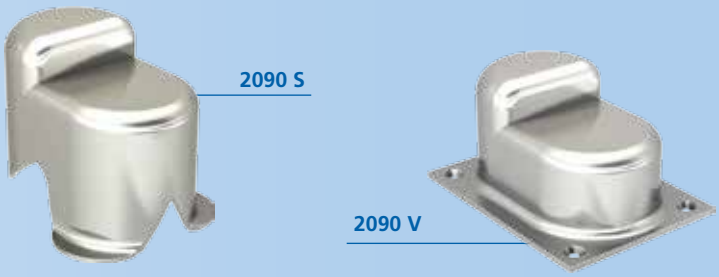

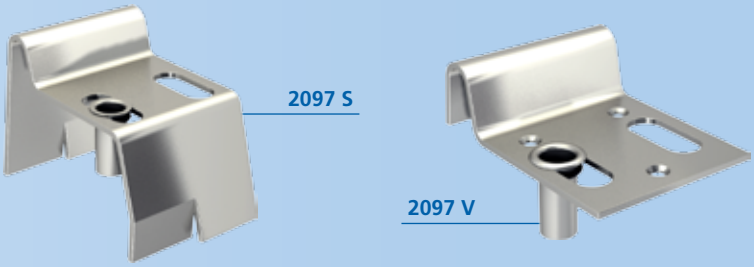

DO NOT HESITATE TO ASK FOR OUR BROCHURE ON:

Our range for **INTERIOR DESIGN** 112A

Sliding systems :

- **FURNITURE** doors
- **WARDROBE** doors
- **FOLDING** doors
- **SEPARATING** doors
- **POCKET SLIDING** doors






Our range for **GLASS DOORS** 613A

Sliding systems for :

- **GLASS** doors
- **FOLDING GLASS** doors
- **PICTURE WINDOWS**





Our range for **HEAVY DOOR** 211A

Sliding systems for :

- fittings for straight **SLIDING** doors up to 2000 kg
- fittings for **ANGLE** sliding doors on tubular tracks
- fittings for **FOLDING** doors with equal leaves
- fittings for **FOLDING** doors with a half leaf
- fittings for **UP AND OVER** doors
- fittings for **SECTIONAL** doors





Our range for **HEAVY DOOR** 911A

Sliding systems for :


- fittings for straight **SLIDING** doors up to 3000 kg
- fittings for **ANGLE** sliding doors on tubular tracks
- fittings for **FOLDING** doors with equal leaves
- fittings for **FOLDING** doors with a half leaf



Our range for **SHUTTERS** 313A

Systems and motorizations for shutters :

- **SLIDING**
- **FOLDING**
- **SWINGING**
- **ROLLING**





All our catalogues are available in interactive format on our website:
«http://www.mantion.com/en/catalogues.html»

MANTION

WWW.MANTION.COM

MANTION S.A.S


7 rue Gay Lussac - BP 1373
F-25006 Besançon Cedex
Tel. + 33 (0) 3 81 50 56 77
Fax + 33 (0) 3 81 53 29 76
Email: mantion@mantion.com
www.mantion.com

VALCOMP SP Z.O.O

ul Boruty 2a
PL-03 769 WARSZAWA
Tel. + 48 22 818 77 22
Fax + 48 22 818 99 78
Email: biuro@valcomp.com.pl
wwww.valcomp.com.pl

MANTION BAUBESCHLÄGE GMBH

Dieselstraße 18
D-42579 HEILIGENHAUS
Tel. + 49 2056 58 26 90
Fax + 49 2056 58 26 99
Email: info@mantion.de
www.mantion.de

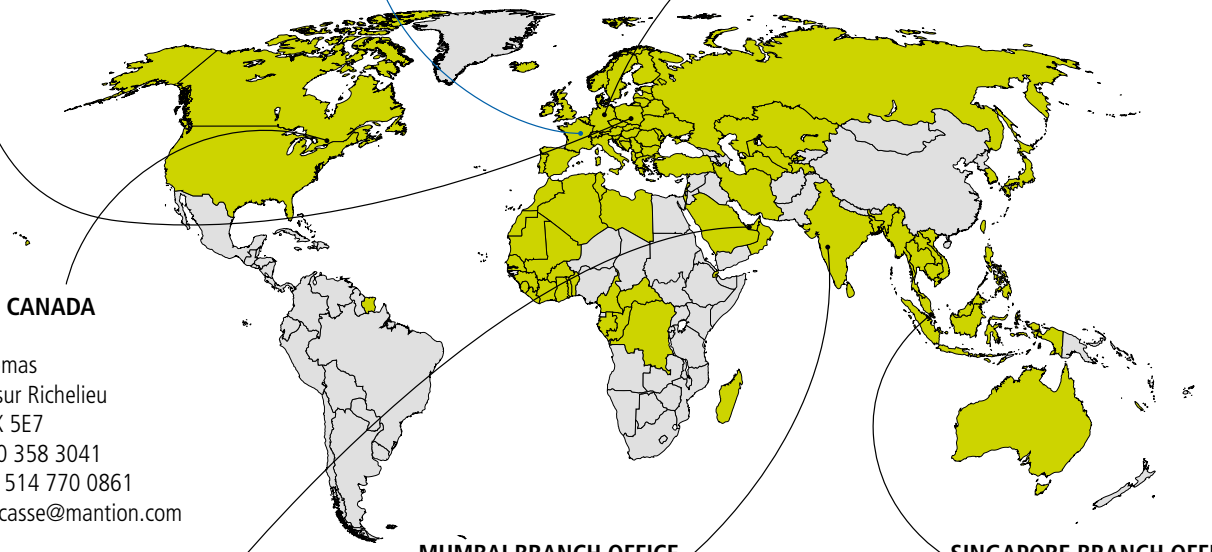

MANTION CANADA

760 av. Thomas
Saint Jean sur Richelieu
Québec J2X 5E7
Tel. + 1 450 358 3041
Mobile + 1 514 770 0861
E-mail: a.lacasse@mantion.com

DUBAI BRANCH OFFICE

Jafza South - Leased Office Building
Building S101 - Floor 0
Unit number: S101 23 O 032
Jebel Ali Free Zone - Dubai - UAE
Mobile + 971(0) 56 174 58 44
E-mail: export@mantion.com

MUMBAI BRANCH OFFICE

A-204, Girnar Towers,
G.D. Ambekar Marg,
Opp. P.T. Road P.O., Kalachowki,
Mumbai 400 033. India
Tel. + 91 22 24 71 81 33
Mobile + 91 9819 30 38 78
E-mail: export@mantion.com

SINGAPORE BRANCH OFFICE

4 Battery road
BANK OF CHINA BUILDING #25-01
SINGAPORE 049908
Mobile + 65 9147 8440
E-mail: export@mantion.com

Distributor:

MADE IN FRANCE since 1920

411A / February 2016 - 2000