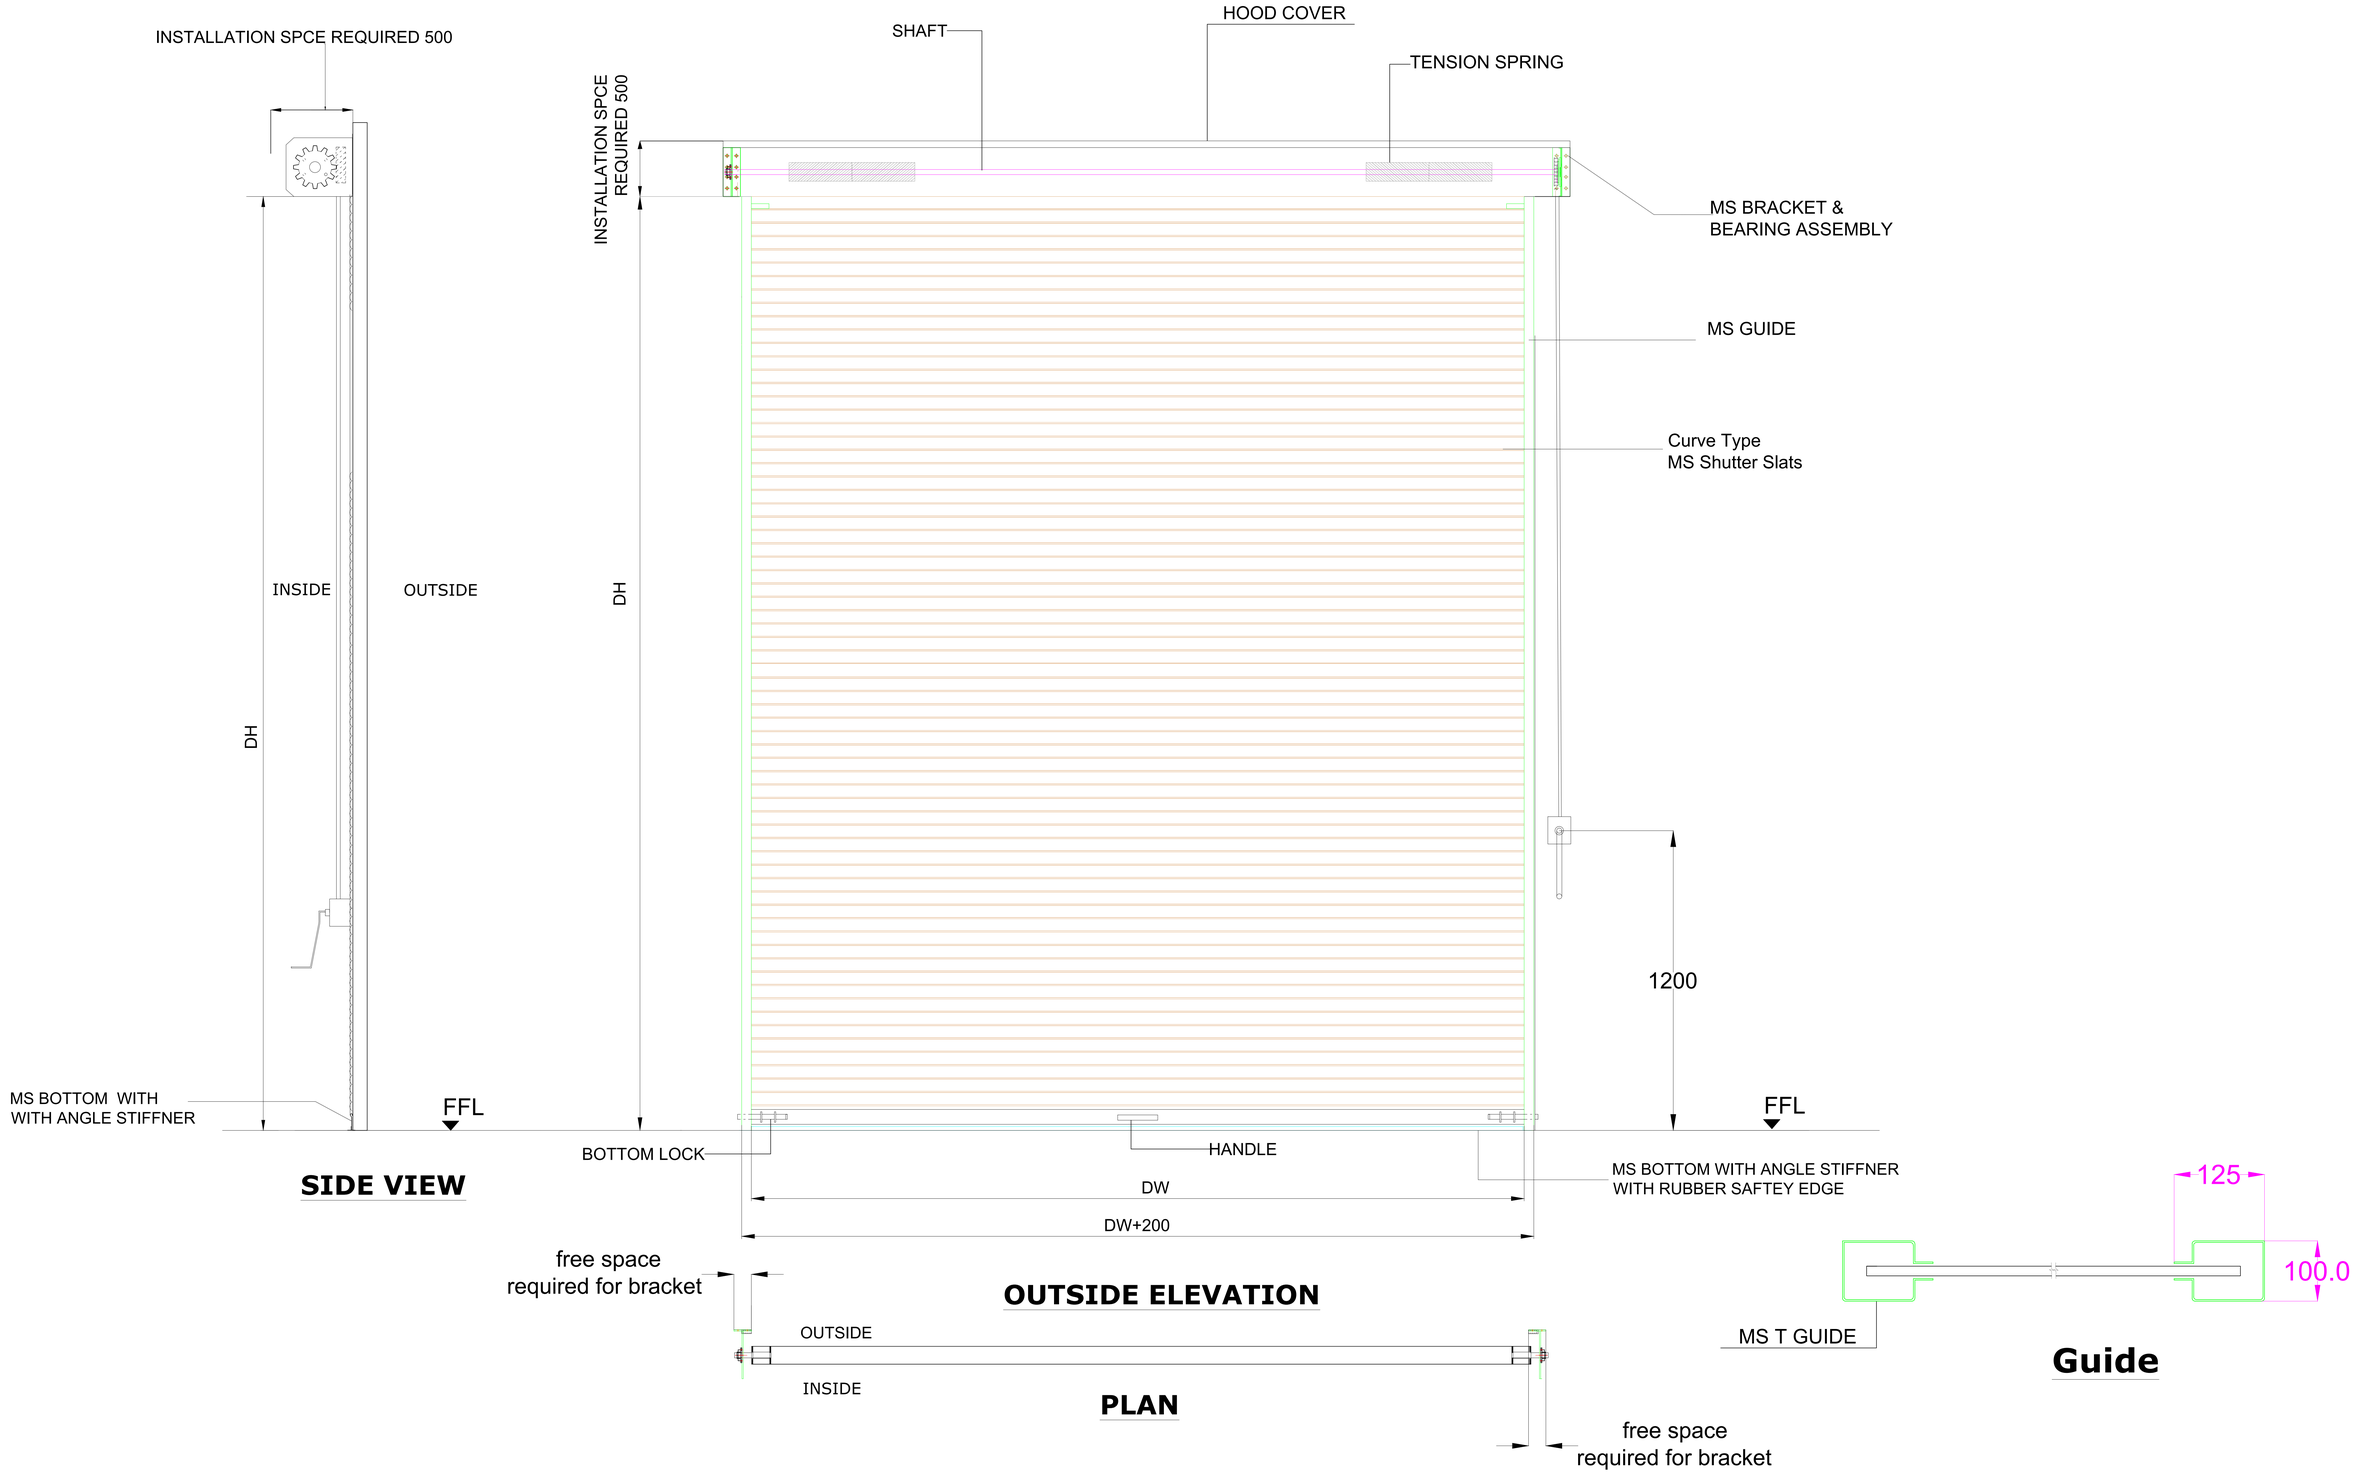


SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Rolling Shutter - InDirect Drive
2	Slat	75 mm wide 1.2 mm thickness
3.	Bottom Profile	100 mm x 2.5 mm with angle stiffner
4.	Guide Profile	M.S." T " Shaped profile 125 x 3.0 mm thick
5.	Hood Cover	Made of GI Sheet Thickness 0.9 mm
6.	Mounting Surface	Structure Mounting
7.	Painting	As Per Client Confirmation

NOTE:-

1. All dimensions are in MM
2. Required civil work will be in client scope

SIZE:-

DW	DH	QTY
6000	6000	1 No.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :-
GEAR OPERATED ROLLING SHUTTER

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

	NAME	DATE
DRAWN	S.J	04/01/2024
CHECK	A.K	04/01/2024
APPROVAL	V.T	04/01/2024

CLIENT - SHREE PRE FAB STEEL PVT LTD
PROJECT - GEAR OPERATED ROLLING SHUTTER
FORMAT NO - NIHVA-F-02
DWG. NO. : NIHVA/NTPL/185 REV-01
If any queries contact : design1@nihva.com
SCALE: NTS WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm