
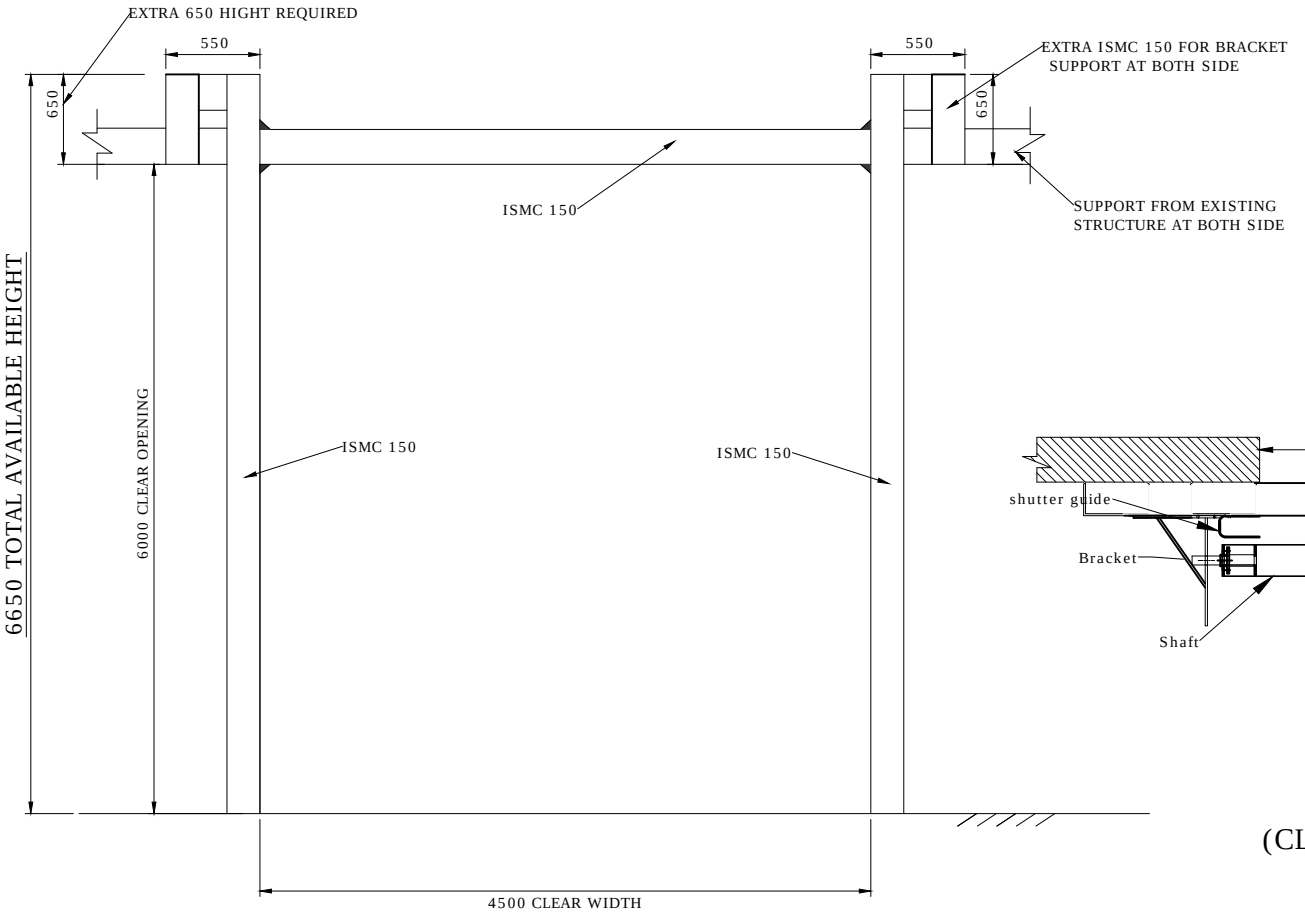


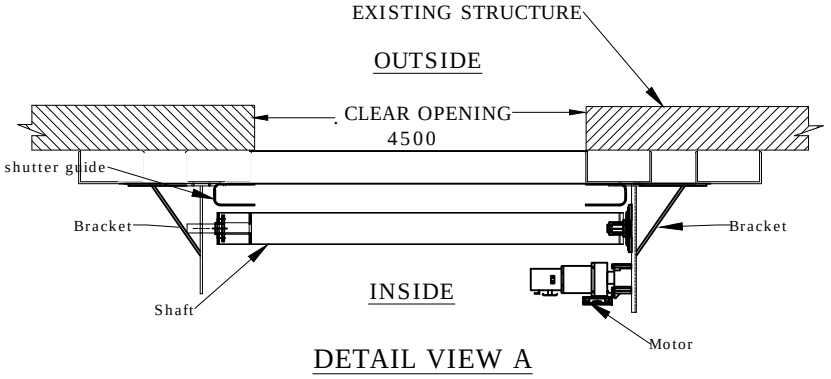

DETAIL VIEW A

(CLEAR OPENING (W)4500X(H)6000)

(NOTE: REQUIRED STRUCTURE FOR DOOR SHOULD BE IN CLIENT SCOPE.)

structure should bear approx. 2000 k.g. weight. (wind pressure included). While Door is in operation, structure should not vibrate and bear/sustain all movements of rolling shutter.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE

STRUCTURE FOR DOUBLE WALL ROLLING SHUTTER

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	SIGN	DATE
DRAWN	ABHIJIT	27/10/15
CHECK	ANIL	27/10/15
ENG		
APPRD.		
MFG		
Ref. No.		

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -PHENIX

PROJECT- INGERSOLL RAND

SITE - AHAMADABAD

DWG. NO. - NIHVA/15-16/155

SCALE: 01 | WT: | SHEET: 01

If any queries contact : projects@nihva.com